84-Lead Plastic Leaded Chip Carrier (L) - Square [PLCC]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

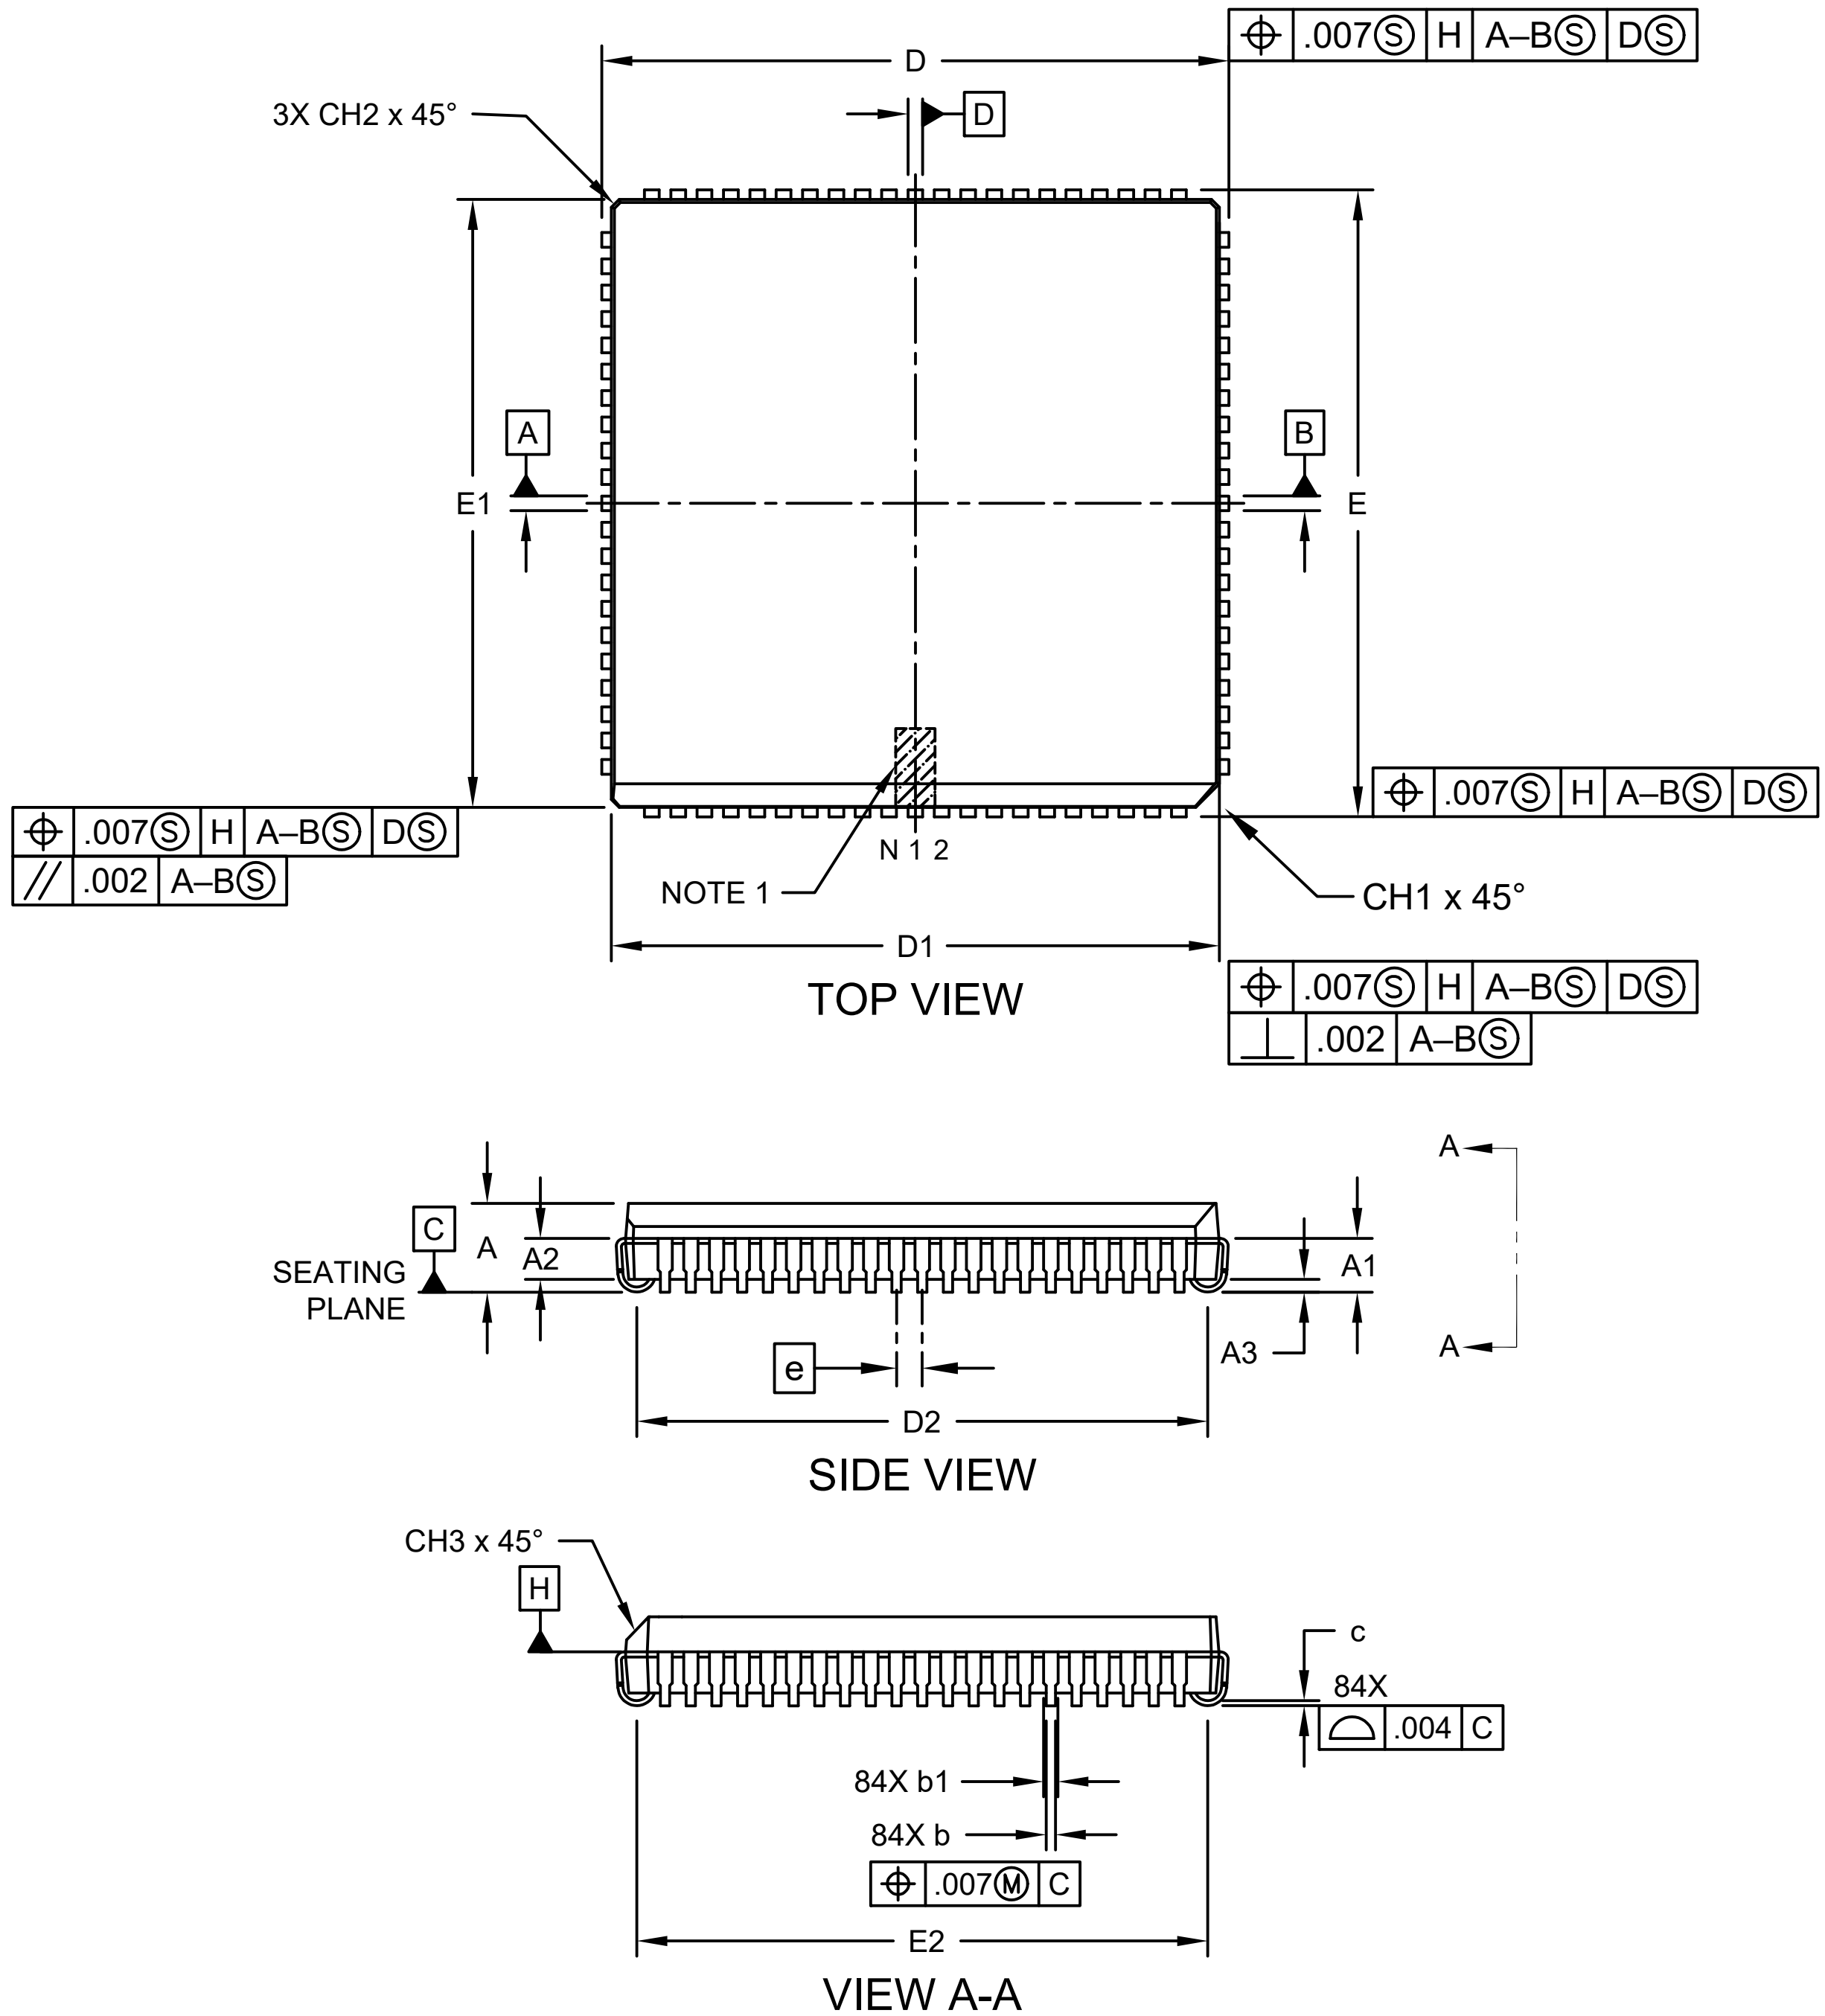

84-Lead Plastic Leaded Chip Carrier (L) - Square [PLCC]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at

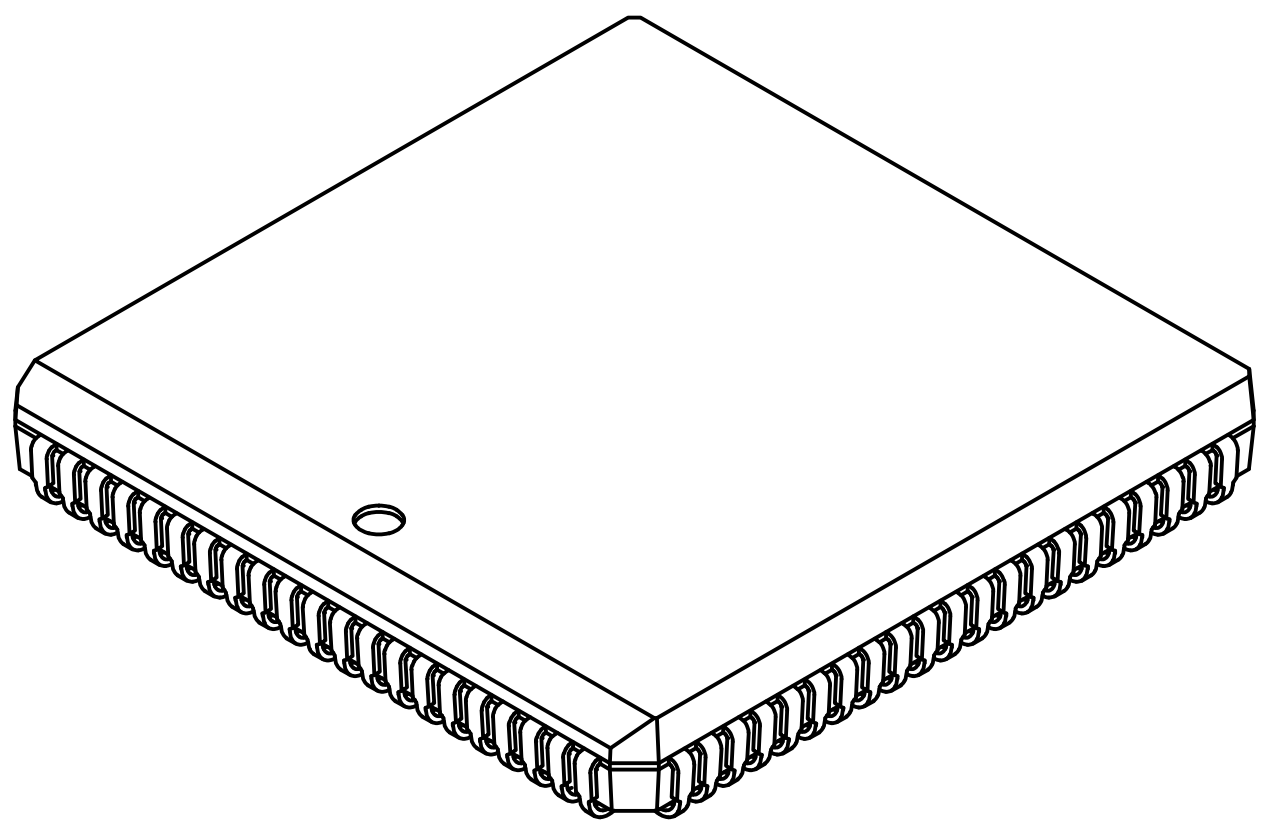

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	84		
Pitch	e	.050		
Overall Height	A	.165	.172	.200
Contact Height	A1	.090	.105	.130
Molded Package to Contact	A2	.059	-	.080
Standoff §	A3	.020	-	-
Corner Chamfer	CH1	.042	-	.048
Chamfers	CH2	-	-	.020
Side Chamfer	CH3	.042	-	.056
Overall Width	E	1.185	1.190	1.195
Overall Length	D	1.185	1.190	1.195
Molded Package Width	E1	1.150	1.154	1.158
Molded Package Length	D1	1.150	1.154	1.158
Footprint Width	E2	1.082	1.110	1.138
Footprint Length	D2	1.082	1.110	1.138
Lead Thickness	c	.0075	-	.0125
Upper Lead Width	b1	.026	-	.032
Lower Lead Width	b	.013	-	.021

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic
3. Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-093 Rev C Sheet 2 of 2

84-Lead Plastic Leaded Chip Carrier (L) - Square [PLCC]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

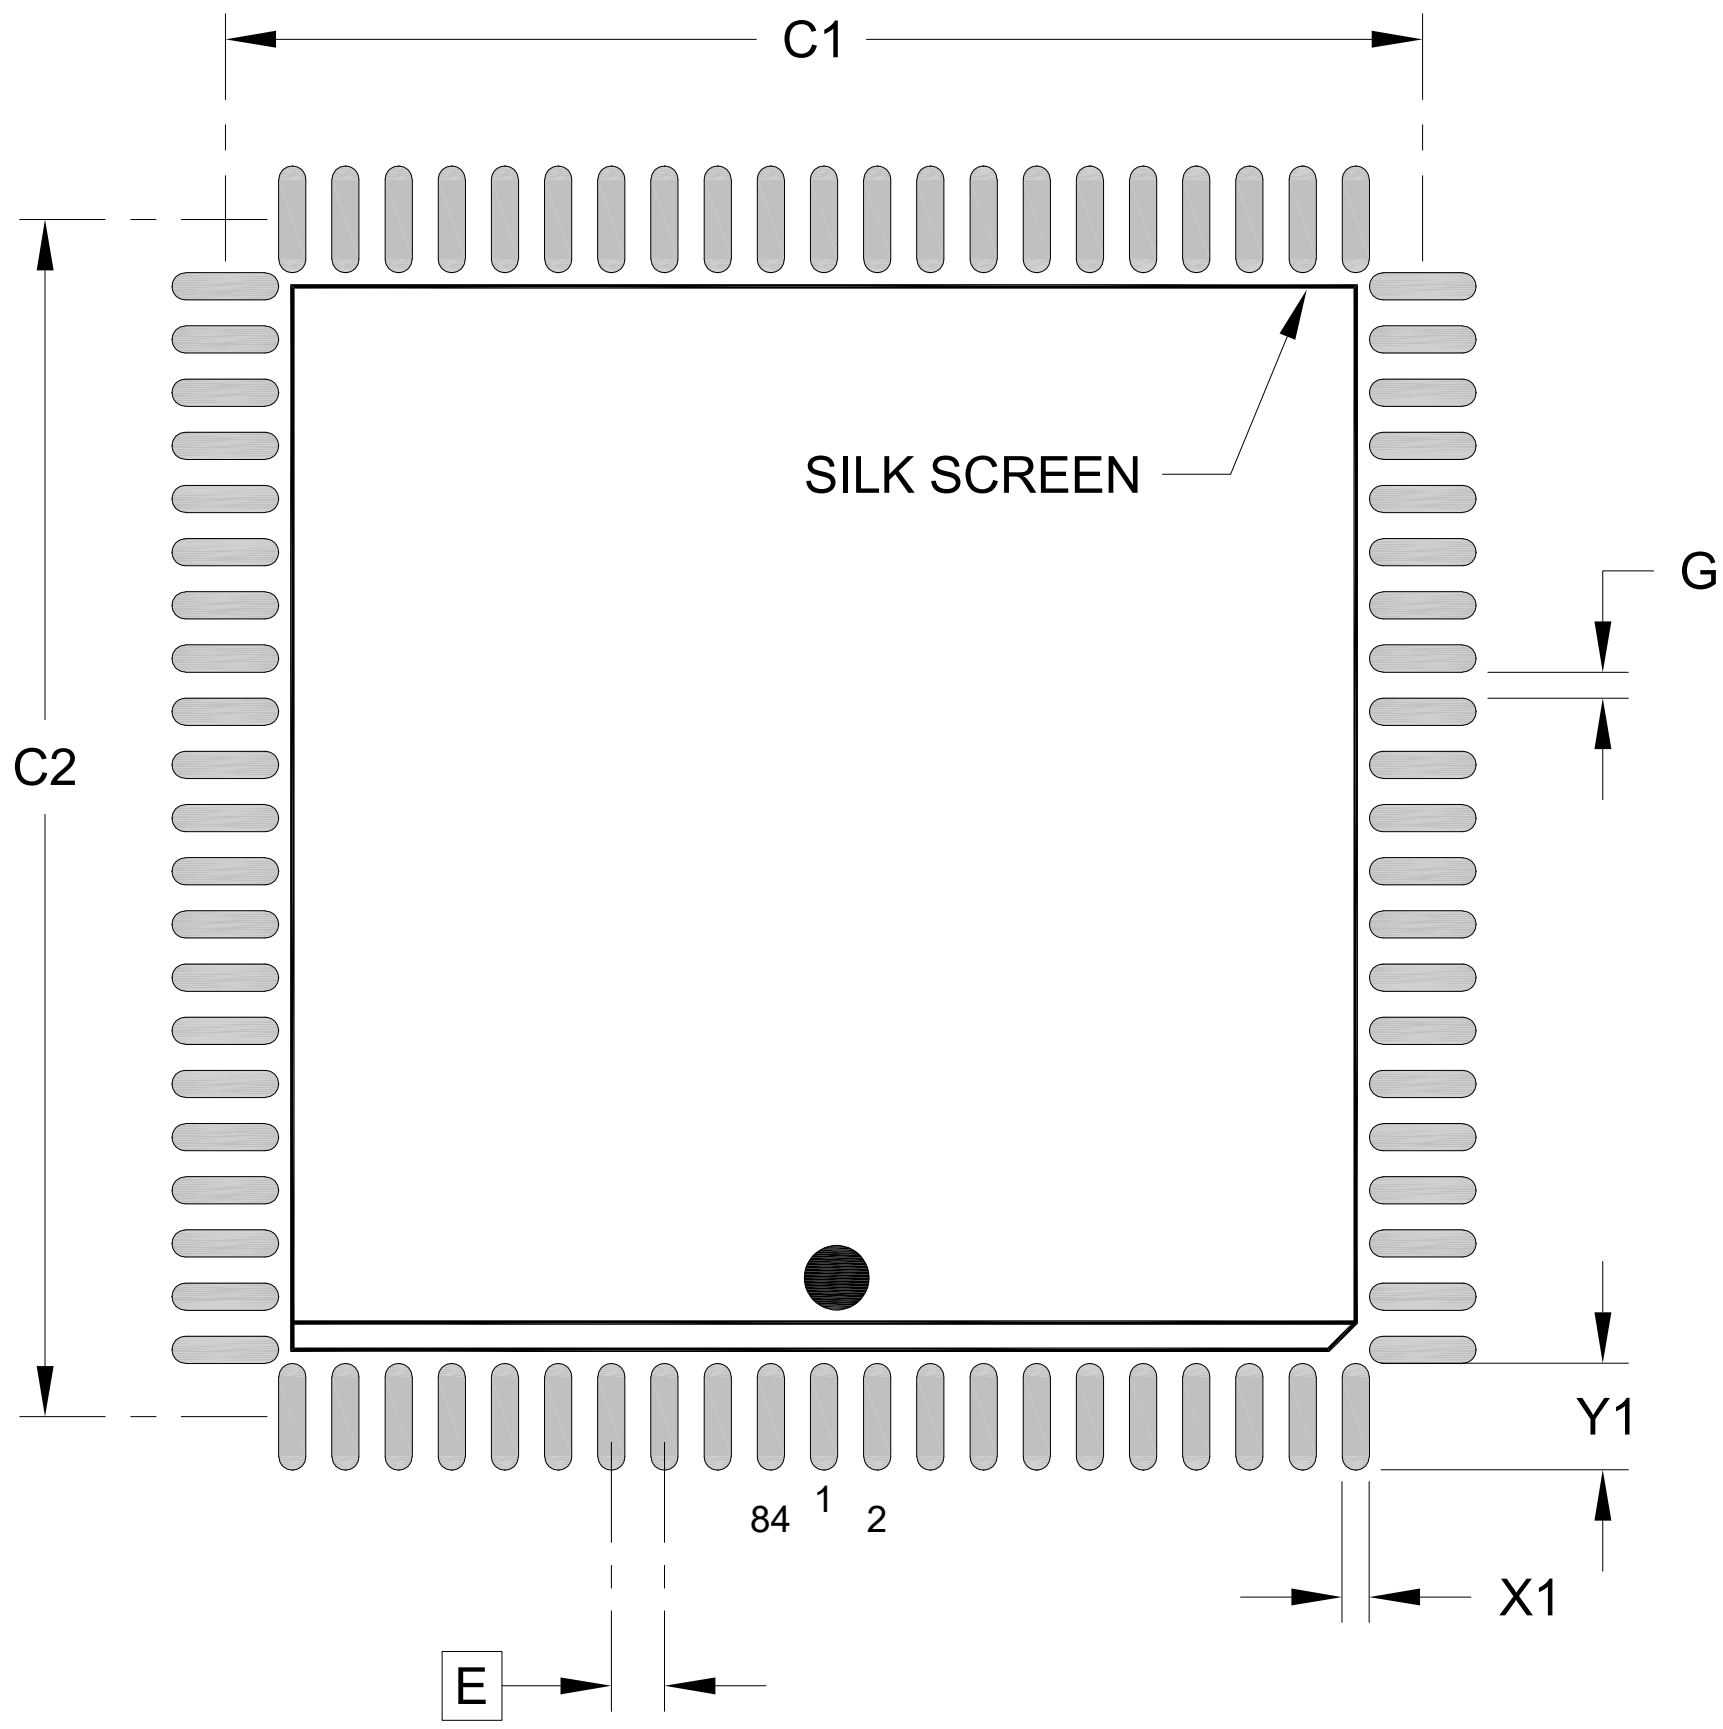

RECOMMENDED LAND PATTERN

	Units	INCHES		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E		.050 BSC	
Contact Pad Spacing	C1		1.126	
Contact Pad Spacing	C2		1.126	
Contact Pad Width (X84)	X1			.026
Contact Pad Length (X84)	Y1			.100
Contact Pad to Center Pad (X80)	G	.008		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2093 Rev C