
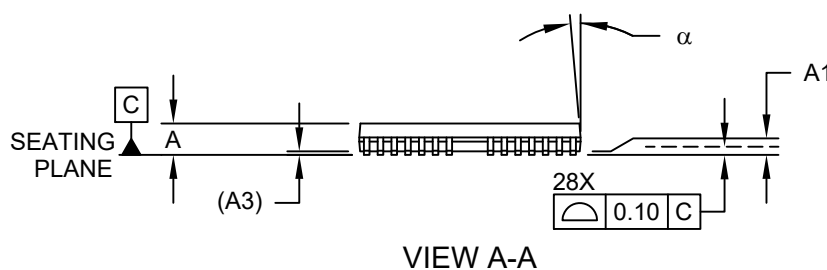
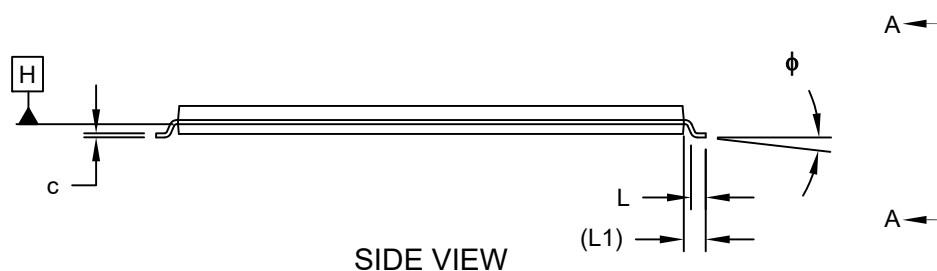


Packaging Diagrams and Parameters

28-Lead Plastic Thin Small Outline (TS) - 8x20 mm Body [TSOP]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

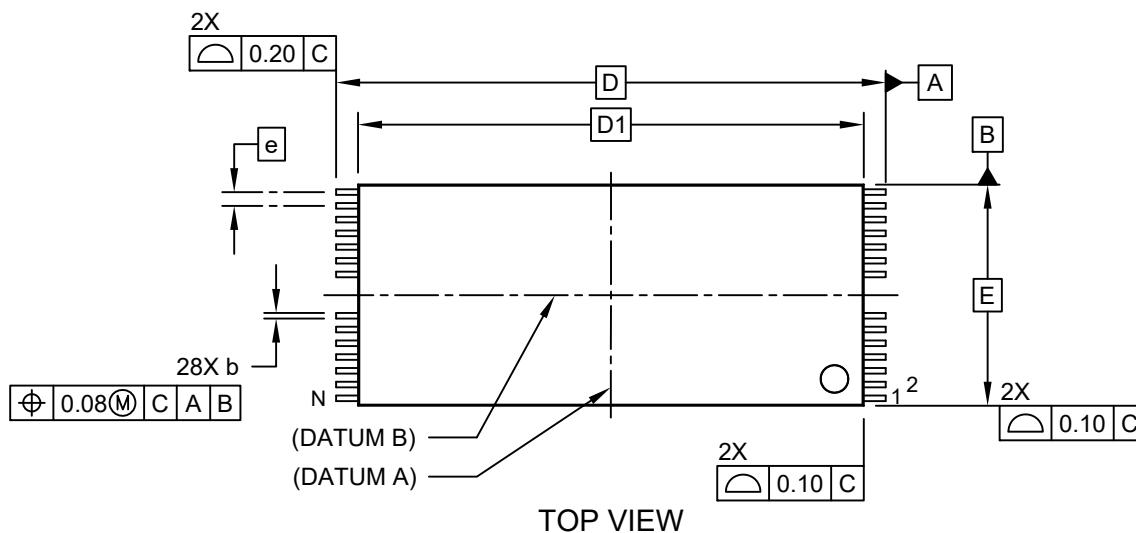

Packaging Diagrams and Parameters

28-Lead Plastic Thin Small Outline (TS) - 8x20 mm Body [TSOP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

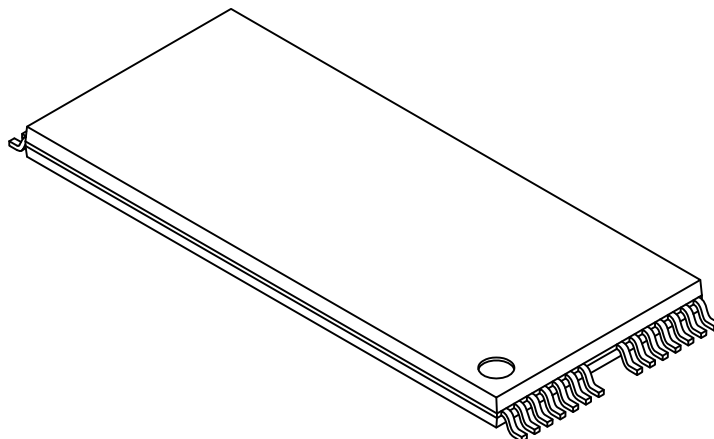

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	28		
Pitch	e	0.50 BSC		
Overall Height	A	0.99	1.14	1.30
Molded Package Thickness	A2	0.95	1.00	1.05
Standoff	A1	0.05	0.15	0.25
Overall Width	E	20.00 BSC		
Molded Package Width	E1	18.40 BSC		
Overall Length	D	8.00 BSC		
Foot Length	L	0.50	0.60	0.70
Footprint	L1	0.25 REF		
Lead Thickness	c	0.10	0.15	0.20
Foot Angle	ϕ	0°	4°	8°
Mold Draft Angle	α	0°	5°	10°
Lead Width	b	0.15	0.20	0.25


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.20mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

28-Lead Plastic Thin Small Outline (TS) - 8x20 mm Body [TSOP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

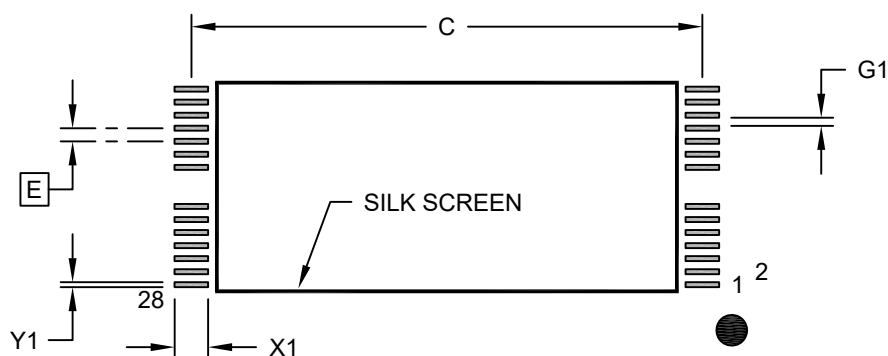

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C		19.60	
Contact Pad Width (X28)	X1			1.30
Contact Pad Length (X28)	Y1			0.30
Contact Pad to Center Pad (X24)	G1	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2067 Rev A