


6-Lead Ceramic Land Grid Array-3.2x2.5x1.7 mm (4RW) -Package Type [CLGA]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

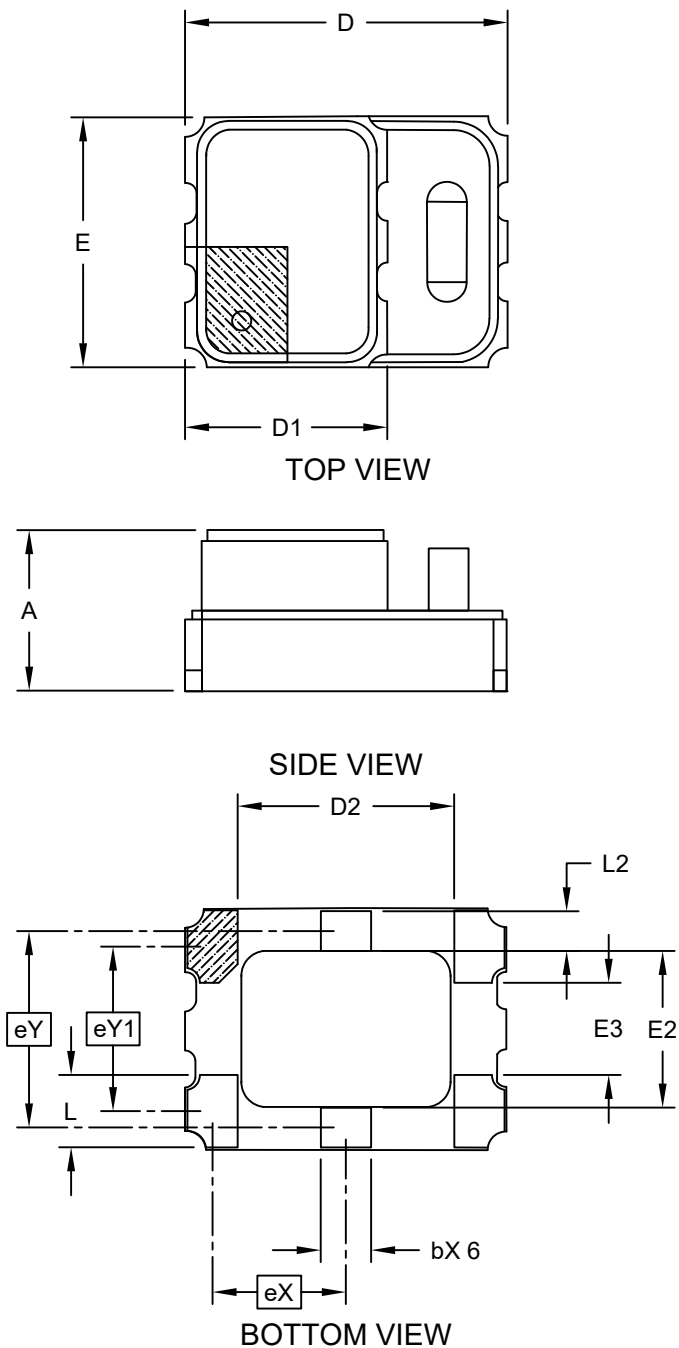

Microchip Technology Drawing C04-596 Rev A Sheet 1 of 2

6-Lead Ceramic Land Grid Array-3.2x2.5x1.7 mm (4RW) -Package Type [CLGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

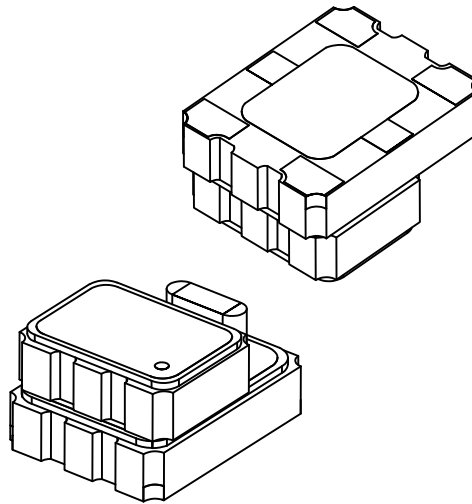


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		6		
Pitch Length	eX		1.28 BSC		
Pitch Height	eY		2.30 BSC		
Pitch Height	eY1		1.60 BSC		
Total Thickness	A		1.50	1.60	1.70
Lower Overall Length	D		3.10	3.20	3.30
Upper Overall Length	D2		1.80	2.00	2.20
Overall Width	E		2.40	2.50	2.60
Terminal Spacing	E2		1.55 BSC		
Terminal Spacing	E3		0.90 BSC		
Terminal Width	b		0.50 BSC		
Terminal Length	L		0.72 BSC		
Terminal Length	L2		0.395 BSC		

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

6-Lead Ceramic Land Grid Array-3.2x2.5x1.7 mm (4RW) -Package Type [CLGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

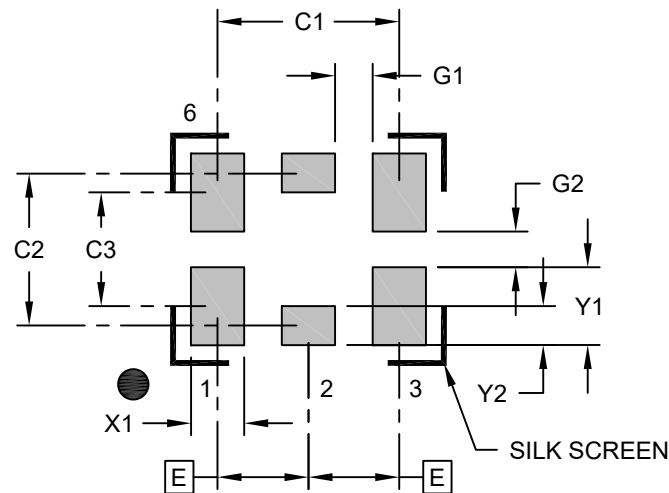

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	EX	1.28 BSC		
Contact Pad Spacing	C1		2.56	
Contact Pad Spacing	C2		2.30	
Contact Pad Spacing	C3		1.60	
Contact Pad Width (Xnn)	X1			0.75
Contact Pad Length (Xnn)	Y1			1.10
Contact Pad Length (Xnn)	Y2			0.55
Contact Pad to Contact Pad (Xnn)	G1	0.53		
Contact Pad to Contact Pad (Xnn)	G2	0.50		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2596 Rev A