


8-Lead Ultra Thin Plastic Quad Flat, No Lead Package (N9A) - 2x2x0.6 mm Body [UQFN]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

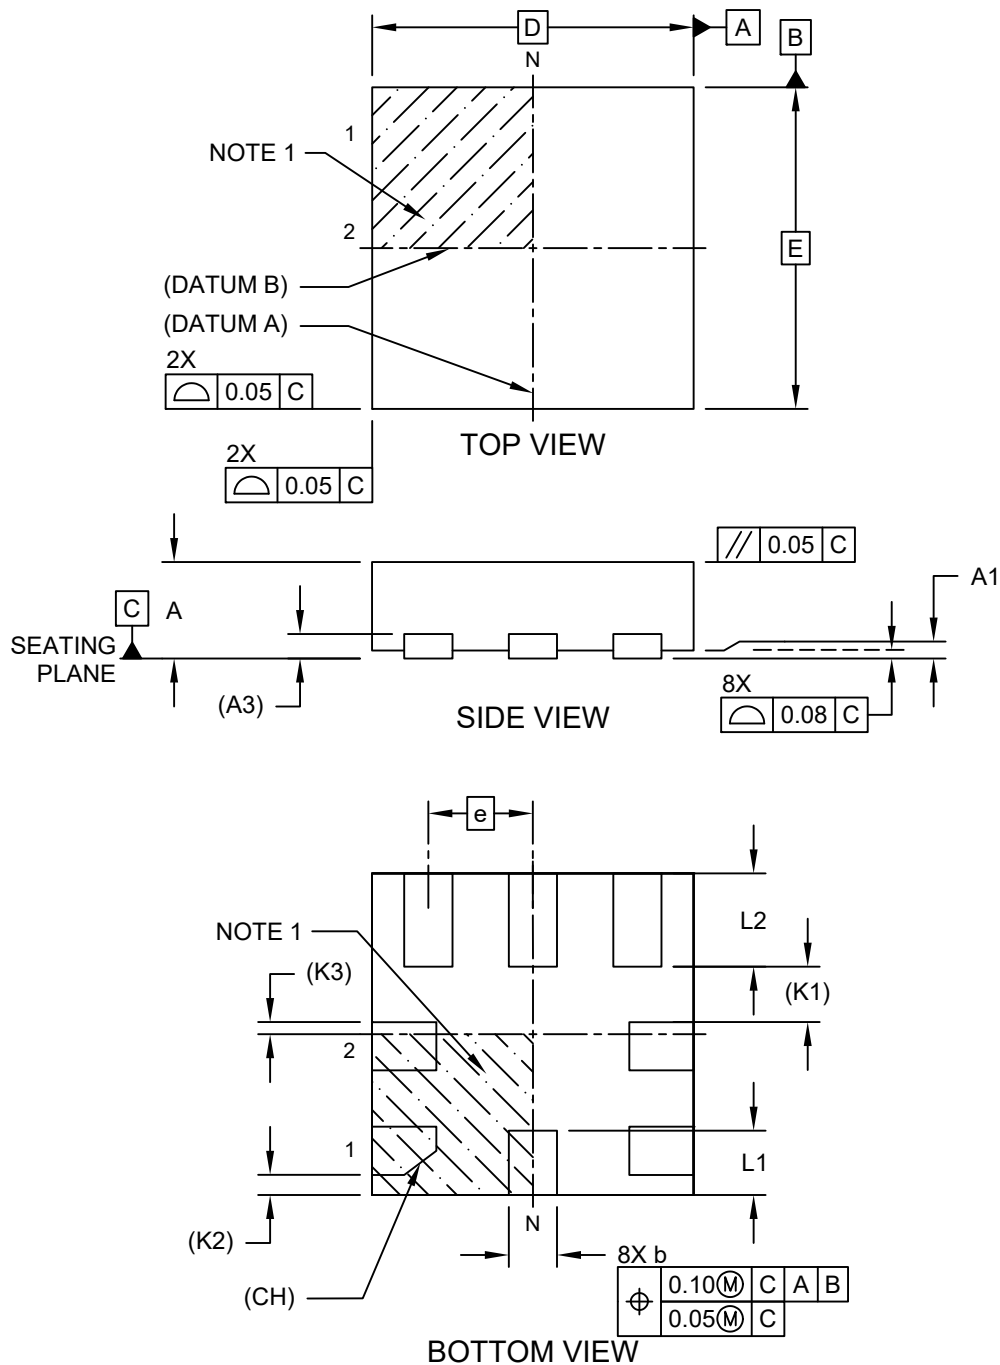

Microchip Technology Drawing C04-1050 Rev A Sheet 1 of 2

8-Lead Ultra Thin Plastic Quad Flat, No Lead Package (N9A) - 2x2x0.6 mm Body [UQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

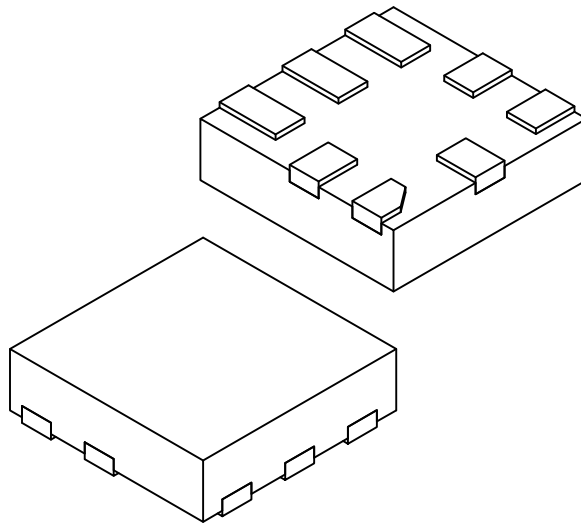


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	8		
Pitch	e	0.65 BSC		
Overall Height	A	0.50	0.55	0.60
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.152 REF		
Overall Length	D	2.00 BSC		
Overall Width	E	2.00 BSC		
Terminal Width	b	0.25	0.30	0.35
Terminal Length (X5)	L1	0.35	0.40	0.45
Terminal Length (X3)	L2	0.53	0.58	0.63
Terminal-to-Terminal	K1	0.35 REF		
Terminal-to-Body Edge	K2	0.125 REF		
Terminal Edge-to-Center Line	K3	0.08 REF		
Pin #1 Chamfer	CH	0.150x45° REF		

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

8-Lead Ultra Thin Plastic Quad Flat, No Lead Package (N9A) - 2x2x0.6 mm Body [UQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

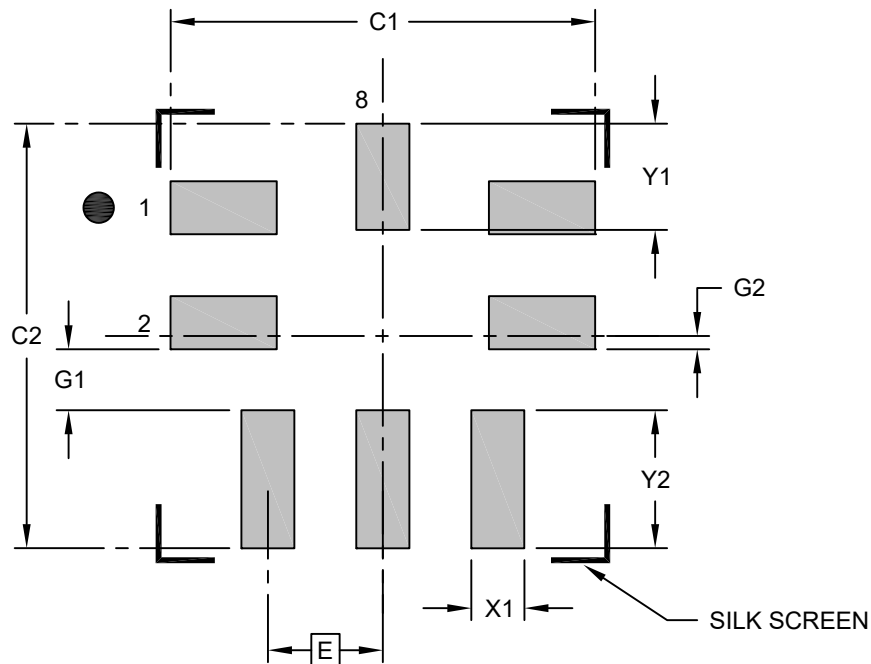

RECOMMENDED LAND PATTERN

Dimension	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Length (X3)	Y2			0.78
Contact Pad Spacing	C1		2.40	
Contact Pad Spacing	C2		2.40	
Contact Pad Width (X8)	X1			0.30
Contact Pad Length (X5)	Y1			0.60
Contact Pad to Contact Pad (X6)	G1	0.32		
Contact Pad to Center Line (X2)	G2	0.08		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3050 Rev A