



**8-Lead Ultra-Thin Dual Flatpack, No Lead Package (Q2B) - 2x2x0.6 mm Body [UDFN]
With 1.50x0.90 Exposed Pad; Atmel Legacy GPC YAG**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

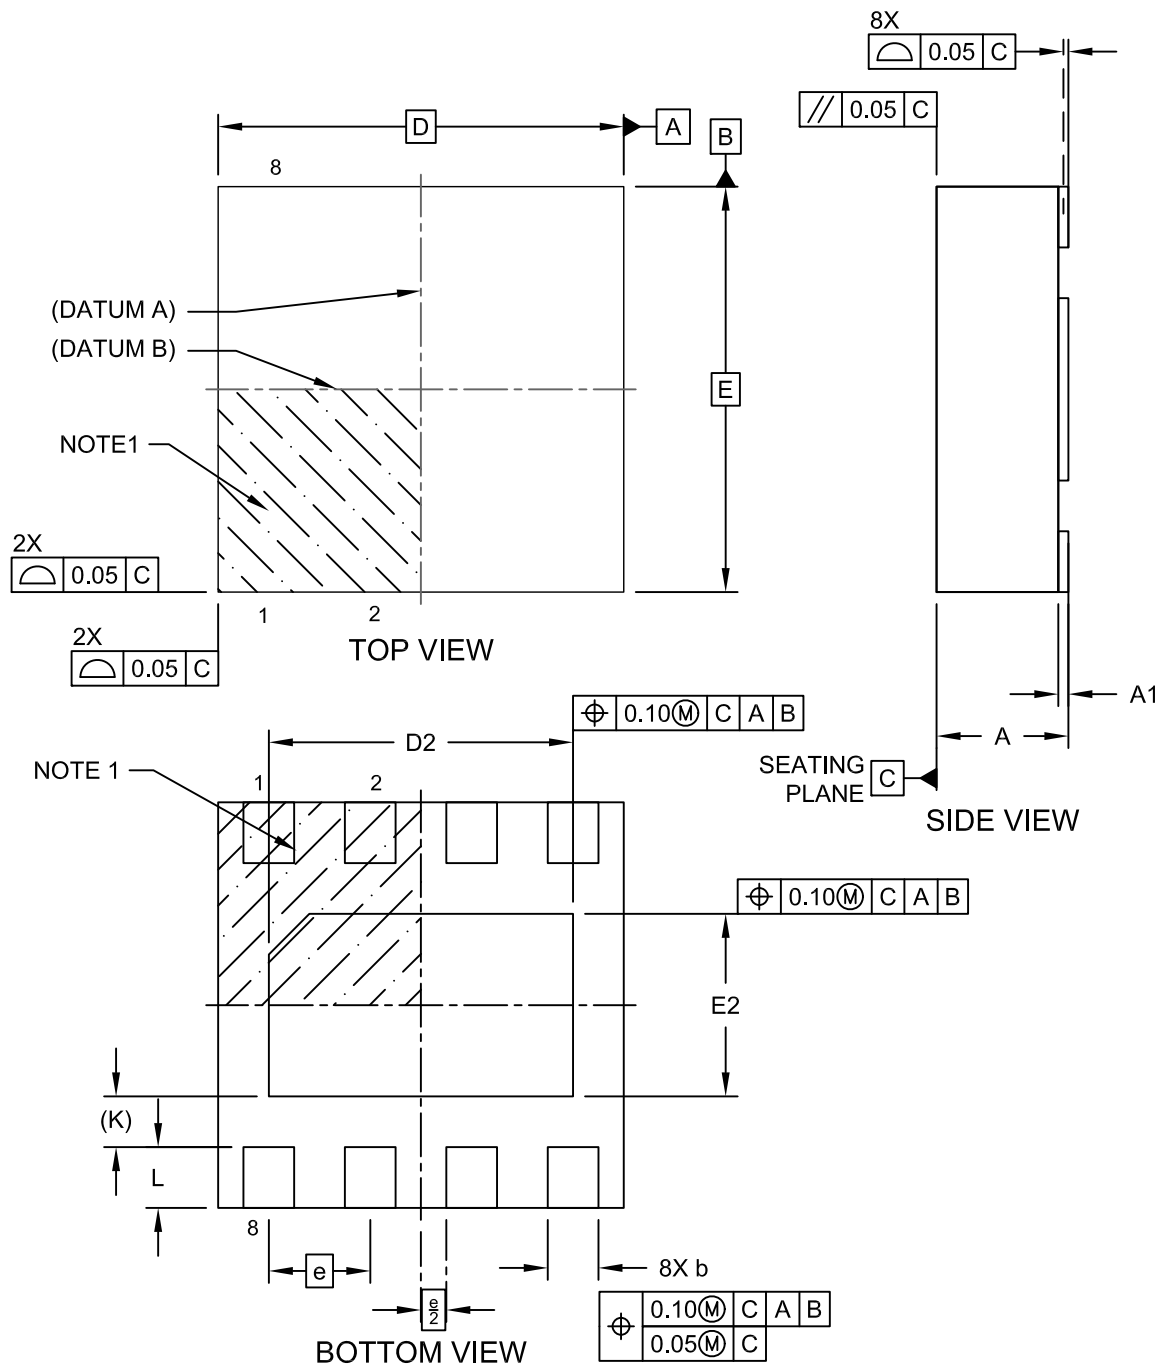

**8-Lead Ultra-Thin Dual Flatpack, No Lead Package (Q2B) - 2x2x0.6 mm Body [UDFN]
With 1.50x0.90 Exposed Pad; Atmel Legacy GPC YAG**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

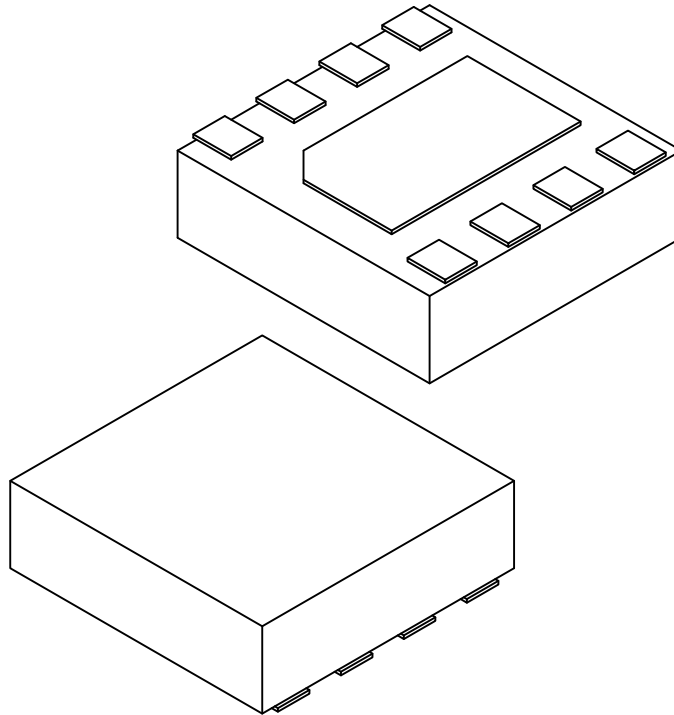


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	8		
Pitch	e	0.50 BSC		
Overall Height	A	-	-	0.60
Standoff	A1	0.00	-	0.05
Overall Length	D	2.00 BSC		
Exposed Pad Length	D2	1.40	1.50	1.60
Overall Width	E	2.00 BSC		
Exposed Pad Width	E2	0.80	0.90	1.00
Terminal Width	b	0.20	-	0.30
Terminal Length	L	0.20	0.30	0.40
Terminal-to-Exposed-Pad	K	0.25 REF		

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

**8-Lead Ultra-Thin Dual Flatpack, No Lead Package (Q2B) - 2x2x0.6 mm Body [UDFN]
With 1.50x0.90 Exposed Pad; Atmel Legacy GPC YAG**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

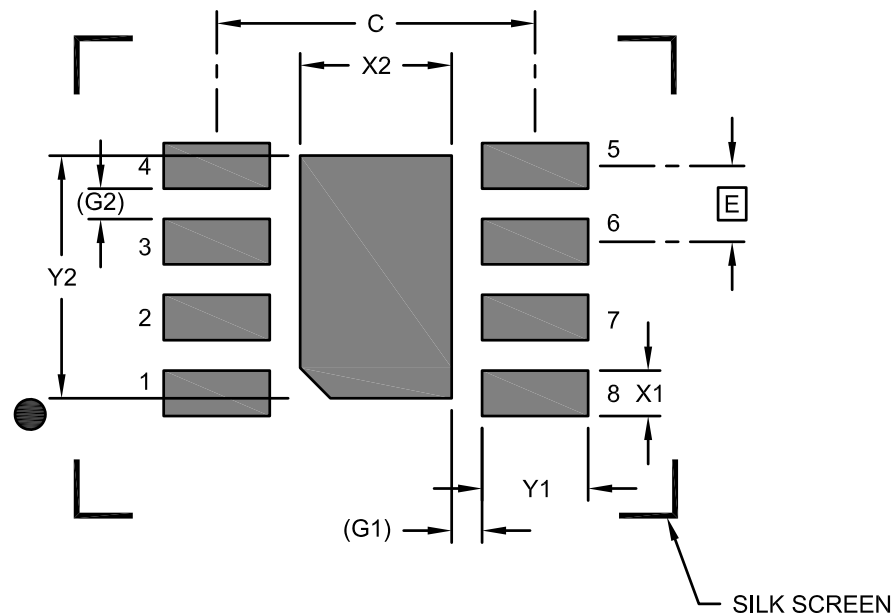

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			1.00
Optional Center Pad Length	Y2			1.60
Contact Pad Spacing	C		2.10	
Contact Pad Width (Xnn)	X1			0.30
Contact Pad Length (Xnn)	Y1			0.70
Contact Pad to Center Pad (Xnn)	G1		0.20 REF	
Contact Pad to Contact Pad (Xnn)	G2		0.20 REF	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process