



OsdagBridge

Open Source Software for Steel Girder Bridge Design

Design Report

Project Name	Third
Project Location	Roorkee, Uttarakhand
Author / Designer	
Reviewer	
Organization	
Client Name and Organization	
Job Number	
Date	2026-08-08
Report Version	

Table of Contents

Executive Summary	2
Project Overview	2
Key Design Outcomes Summary	5
Design Assumptions and Limitations	5
1 Project Information	6
1.1 Project and Design Team Details	6
1.2 Applicable Codes and Standards	6
2 Input Parameters	7
2.1 Basic Inputs (User-Defined)	7
2.2 Additional Inputs	8
3 Loads and Load Combinations	16
4 Analysis Results	20
5 Design Checks	25
5.1 Plate Girder Design	25
5.2 Deck Slab Design	55
5.3 Cross Bracing Design	60
5.4 End Diaphragm Design	64
5.5 Overall Design Check Summary	68
6 Drawings and Visualizations	71
6.1 Bridge Configuration and Layout	71
6.2 Plate Girder — Detailed Views	73
6.3 Cross Bracing Detail	74
6.4 End Diaphragm Detail	75
7 Material Take-off & Quantity Summary	77
8 Standards & Assumptions	78
8.1 Design Standards	78
8.2 Analysis and Design Assumptions of This Version	79
8.3 Known Limitations of This Version	79
References	80

Executive Summary

This section provides a concise summary of the bridge design, key inputs, governing loads, and final design outcomes.

Project Overview

Bridge Type	Highway Bridge
Design Standard	IRC 5, IRC 6, IRC 22, IRC 24, IS 800
Span	40 m
Carriageway Width	20 m
No. of Girders	10
Girder Spacing	2.465
Deck Thickness	250.0
Overall Design Status	Fail (Fatigue Normal Stress, Int.Stiff: Leg H_limit, Fatigue Shear Stress)
Governing Check	Int.Stiff: Leg H_limit
Overall Utilization Ratio (max)	1.92 (Girder)

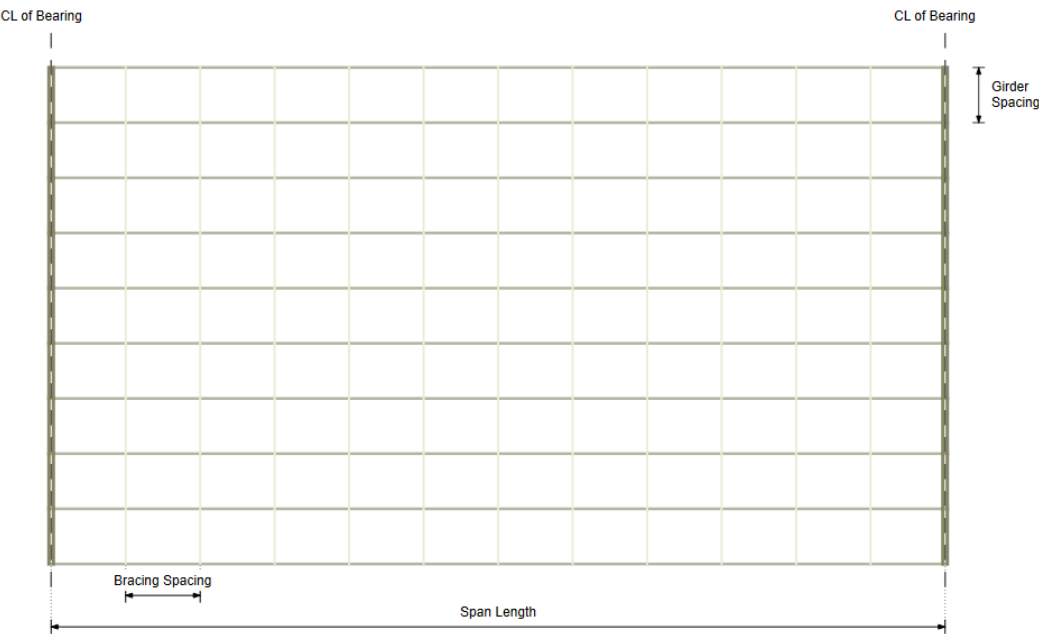


Figure 1 – Overall Bridge Plan

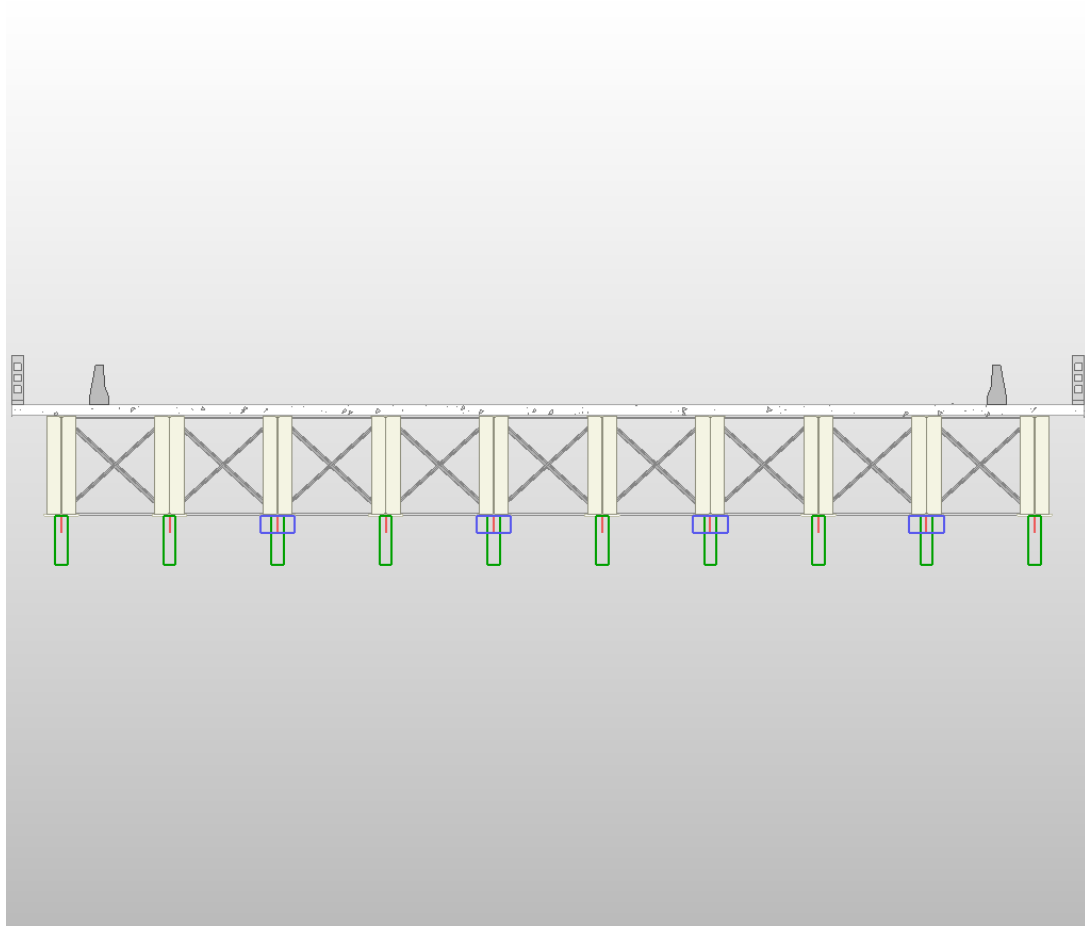


Figure 2 – Typical Cross-Section (with girder, deck, barriers, footpath)

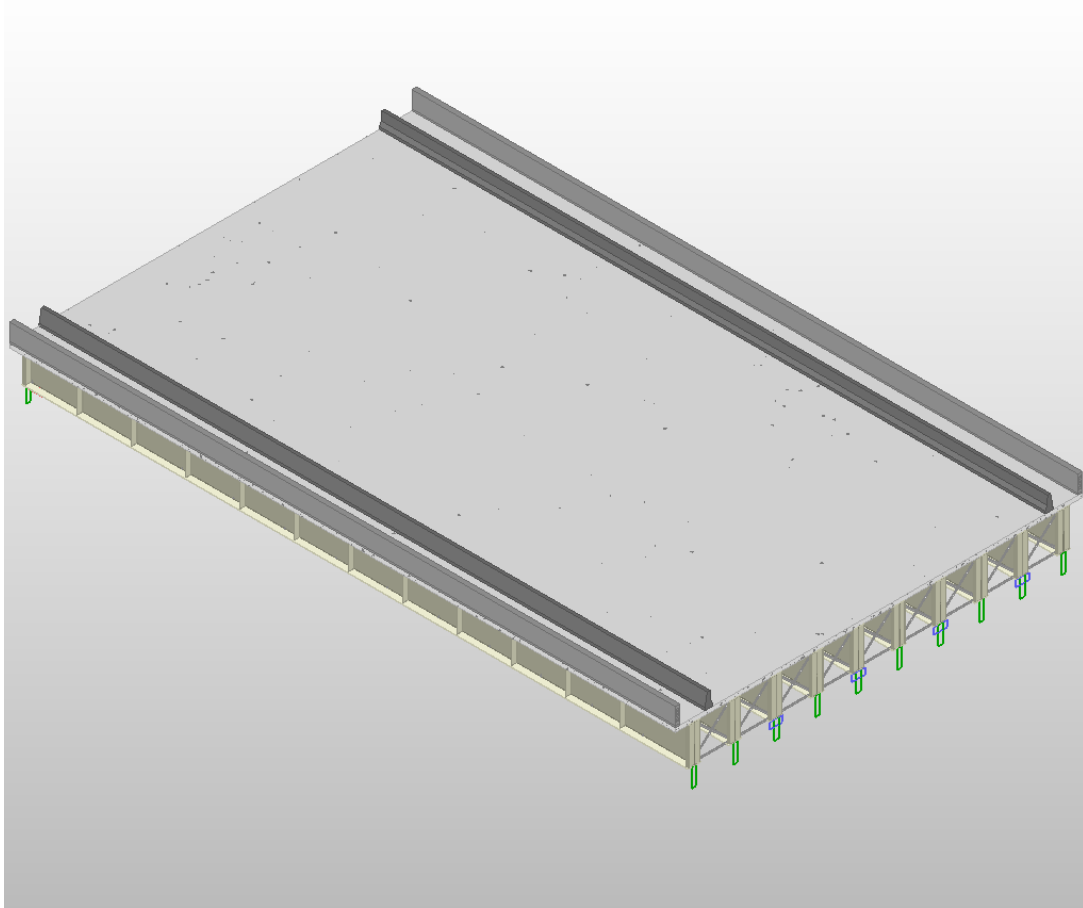


Figure 3 – 3D View of Bridge Superstructure

Table 1 – Final Bridge Geometry (after optimization)

	G1	G2	G3	G4	G5	G6	G7	G8
Member ID	G1M1	G2M1	G3M1	G4M1	G5M1	G6M1	G7M1	G8M1
Section Designation	2230 x 670 x 28 x 670 x 36	2230 x 670 x 28 x 670 x 36	2230 x 670 x 28 x 670 x 36	2230 x 670 x 28 x 670 x 36	2230 x 670 x 28 x 670 x 36	2230 x 670 x 28 x 670 x 36	2230 x 670 x 28 x 670 x 36	2230 x 670 x 28 x 670 x 36
Governing Check	Int.Stiff: Leg H_ limit	Int.Stiff: Leg H_ limit	Int.Stiff: Leg H_ limit	Int.Stiff: Leg H_ limit	Int.Stiff: Leg H_ limit	Int.Stiff: Leg H_ limit	Int.Stiff: Leg H_ limit	Int.Stiff: Leg H_ limit
Utilization Ratio	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)

Note: Utilization ratio (UR) = demand / capacity. A value < 1.0 indicates a passing check.

Key Design Outcomes Summary

Girder design pass

Cross bracing design pass

End Diaphragm design pass

Deck design pass

Design Assumptions and Limitations

- Additional inputs not provided by the user were assumed by software per IRC/IS code defaults or practical consideration.
- Grillage analysis was performed using OSPGrillage assuming simply supported I-girders.
- Substructure and foundation design are not included in this report.
- Splice connections and bearings are not designed in this version.

1 Project Information

This section records all project metadata as entered by the designer.

1.1 Project and Design Team Details

Project Name	Third
Project Location	Roorkee, Uttarakhand
Designer	
Reviewer	
Organization	
Client	
Software Version	OsdagBridge

1.2 Applicable Codes and Standards

- Indian Roads Congress (IRC) 5: General Features of Design
- Indian Roads Congress (IRC) 6: Loads and Load Combinations
- Indian Roads Congress (IRC) 22: Composite Construction (Limit State Design)
- Indian Roads Congress (IRC) 24: Steel Road Bridges (Limit State Method)
- Indian Roads Congress (IRC) 112: Concrete Road Bridges (deck design)
- Indian Roads Congress Special Publication (IRC SP) 114: Seismic Design of Road Bridges
- Indian Standard (IS) 800: General Construction in Steel
- Indian Standard (IS) 2062: Hot Rolled Structural Steel Specification
- Indian Standard (IS) 6006: Steel Bearings

2 Input Parameters

This section documents all inputs provided to OsdagBridge. User-provided inputs are clearly distinguished from software-assumed defaults. Where the user did not supply a value, the software has applied the IRC/IS code default or an empirical guideline; these are annotated with an asterisk (*).

2.1 Basic Inputs (User-Defined)

Note: These inputs are mandatory and were provided by the user.

Table 2.1: Project Location

parameter	value
Project Location	Roorkee, Uttarakhand
Latitude / Longitude	29.8543, 77.888
Seismic Zone (IRC 6)	IV
Basic Wind Speed (IRC 6)	39 m/s
Shade Temp. Max / Min (IRC 6)	47.4 °C / -2.2 °C

Table 2.2: Bridge Geometry

parameter	value
Type of Structure	Highway Bridge
Span (m)	40 m
Carriageway Width (m)	20 m
Include Median	No
Footpath	Both Sides
Skew Angle (degrees)	(IRC 24 Cl. 504.8 limit: $\pm 15^\circ$)

Table 2.3: Material Selection

parameter	value
Girder Steel Grade (IS 2062)	E 350A
Cross Bracing Steel Grade	E 350A
End Diaphragm Steel Grade	E 350A
Concrete Deck Grade (IRC 22)	M40

* Software default value

2.2 Additional Inputs

Where the user has modified additional inputs, those values are reported here. Where no modification was made, the software default is shown.

Table 2.4: Typical Section Details

parameter	value
Overall Bridge Width (m)	24.65
No. of Girders	10
Girder Spacing (m)	2.465 m
Deck Overhang Width (m)	1.2325 m
Deck Thickness (mm)	250.0 mm
Footpath Width (m)	1.5 m (IRC 5 Cl. 104.3.6 min: 1.5 m)
No. of Traffic Lanes	(per IRC 5 Cl. 104.3.1)

Table 2.5: Components Details

parameter	value
Crash Barrier Type	IRC 5 - RCC Crash Barrier
Crash Barrier Load (kN/m)	6.81
Railing Type	IRC 5 - RCC Railing
Railing Load (kN/m)	6.806
Wearing Course Material	Concrete
Wearing Course Thickness (mm)	50.0 mm

Table 2.6: Girder General Information

Girder	Member ID	Design Mode	Girder Type	Girder Symmetry
G1	G1M1	Custom	Welded	Girder Symmetric
G2	G2M1	Custom	Welded	Girder Symmetric
G3	G3M1	Custom	Welded	Girder Symmetric
G4	G4M1	Custom	Welded	Girder Symmetric
G5	G5M1	Custom	Welded	Girder Symmetric
G6	G6M1	Custom	Welded	Girder Symmetric
G7	G7M1	Custom	Welded	Girder Symmetric
G8	G8M1	Custom	Welded	Girder Symmetric
G9	G9M1	Custom	Welded	Girder Symmetric
G10	G10M1	Custom	Welded	Girder Symmetric

Table 2.7: Girder Section Dimensions

Girder	Total Depth, D (mm)	Web, t_w (mm)	Top Flange (b_{tf}, t_{tf}) mm	Bottom Flange (b_{bf}, t_{bf}) mm
G1	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm
G2	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm
G3	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm
G4	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm
G5	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm
G6	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm
G7	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm
G8	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm
G9	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm
G10	2.23 mm	0.012 mm	0.67 mm, 0.028 mm	0.67 mm, 0.036 mm

Table 2.8: Girder Restraint and Stiffener Details

Girder	Torsional / Warping Restraint	Web Philosophy	Intermediate Stiffeners	Longitudinal Stiffeners	Bearing Stiffener
G1	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G2	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G3	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G4	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G5	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G6	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G7	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm

G8	Fully Re- strained, Both Flanges Restrained	Thin Web with ITS	Yes; Spac- ing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G9	Fully Re- strained, Both Flanges Restrained	Thin Web with ITS	Yes; Spac- ing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G10	Fully Re- strained, Both Flanges Restrained	Thin Web with ITS	Yes; Spac- ing: 3260 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm

Table 2.9: Member Properties: Cross Bracing Details

Location	Member IDs	Type of Bracing	Bracing Section	Spacing (m)
G1 to G2	B1M1 to B1M1	X-Bracing	IS 100 x 100 x 10	20.0 m
G2 to G3	B2M1 to B2M1	X-Bracing	IS 100 x 100 x 10	20.0 m
G3 to G4	B3M1 to B3M1	X-Bracing	IS 100 x 100 x 10	20.0 m
G4 to G5	B4M1 to B4M1	X-Bracing	IS 100 x 100 x 10	20.0 m
G5 to G6	B5M1 to B5M1	X-Bracing	IS 100 x 100 x 10	20.0 m
G6 to G7	B6M1 to B6M1	X-Bracing	IS 100 x 100 x 10	20.0 m
G7 to G8	B7M1 to B7M1	X-Bracing	IS 100 x 100 x 10	20.0 m
G8 to G9	B8M1 to B8M1	X-Bracing	IS 100 x 100 x 10	20.0 m
G9 to G10	B9M1 to B9M1	X-Bracing	IS 100 x 100 x 10	20.0 m

Table 2.10: Member Properties: End Diaphragm Details

Location	Member IDs	Type of Bracing	Bracing Section
G1 to G2	E1M1 to E1M2	Cross Bracing	IS 100 x 100 x 10
G2 to G3	E2M1 to E2M2	Cross Bracing	IS 100 x 100 x 10
G3 to G4	E3M1 to E3M2	Cross Bracing	IS 100 x 100 x 10
G4 to G5	E4M1 to E4M2	Cross Bracing	IS 100 x 100 x 10
G5 to G6	E5M1 to E5M2	Cross Bracing	IS 100 x 100 x 10
G6 to G7	E6M1 to E6M2	Cross Bracing	IS 100 x 100 x 10
G7 to G8	E7M1 to E7M2	Cross Bracing	IS 100 x 100 x 10
G8 to G9	E8M1 to E8M2	Cross Bracing	IS 100 x 100 x 10
G9 to G10	E9M1 to E9M2	Cross Bracing	IS 100 x 100 x 10

Table 2.11: Shear Connector Details

parameter	value
Stud Diameter (mm)	20.0 mm
Stud Height (mm)	100.0 mm
Stud f_y (MPa)	385.0 MPa
Stud f_u (MPa)	495.0 MPa
No. of Studs per Section	2

Note: All values are per IRC 22 Table 1 unless user-modified.

Table 2.12: Partial Safety Factors

parameter	value
γ_{M0} (Yielding / Buckling)	1.1
γ_{M1} (Ultimate Stress)	1.25
γ_C (Concrete, Basic)	1.5
γ_s (Reinforcement)	1.15
γ_v (Shear Connectors)	1.25
γ_{fft} (Fatigue Load)	1.0
γ_{Mft} (Fatigue Strength)	1.35

3 Loads and Load Combinations

This section summarizes all loads applied to the bridge and the load combinations considered for analysis and design.

Table 3.1: Dead Load – Self Weight

parameter	value
Steel Self-Weight Applied	76.4 kN/m ³
Concrete Deck Weight	24.5 kN/m ³
Self-Weight Factor	1.0

Table 3.2: Dead Load for Surfacing (DW)

parameter	value
Wearing Course Load	Concrete x 50.0
Additional SIDL (Crash Barrier)	6.81 kN/m per barrier
Railing Load	6.806 kN/m*

Table 3.3: Live Loads (LL)

parameter	value
Vehicles Considered	Class A, Class 70R (Wheeled), Class 70R (Tracked), Class AA (Wheeled), Class AA (Tracked), Class SV, Class 70R (Bogie), Class Fatigue
Impact Factor (IRC 6)	Class A: 1.168, Class AA/70R: 1.100
Braking Load (IRC 6)	N/A
Footpath Live Load (if applicable)	

* Software default value

Table 3.4: Wind Load (WL) — per IRC 6

parameter	value
Basic Wind Speed, V_b	39 m/s [from Project Location]
Terrain Type	Plain Terrain
Average Exposed Height, H (m)	10 m
Hourly Mean Wind Speed, V_z	
Hourly Wind Pressure, P_z	
Transverse Wind Force	
Longitudinal Wind Force	
Vertical Wind Force	

Table 3.5: Earthquake Load (EL) — per IRC 6

parameter	value
Seismic Zone	IV [from Project Location]
Zone Factor, Z	0.24
Importance Factor, I	1.0
Type of Soil	Type I – Rocky or Hard
S_a/g	2.8
Horizontal Seismic Coefficient, A_h	0.336
Vertical Seismic Coefficient, A_v	0.224
Horizontal Seismic Force (longitudinal)	kN
Horizontal Seismic Force (transverse)	kN

Table 3.6: Temperature Load (TL) — per IRC 6

parameter	value
Maximum Shade Temperature	47.4 °C
Minimum Shade Temperature	-2.2 °C
Effective Bridge Temp. Range	-12.20 to 62.40 °C
Temperature Rise / Fall for Design	+37.30 °C / −37.30 °C

Table 3.7: Load Combinations

Combination ID	Load Cases
ULS-01	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(1.50) + WL(0.90) + TL(0.90)
ULS-02	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(1.15) + WL(1.50) + TL(0.90)
ULS-03	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(1.15) + WL(0.90) + TL(1.50)
ULS-04	DL(1.00/1.00) + SIDL(1.00/1.00) + LL(0.75) + TL(0.50) + VC(1.00)
ULS-05	DL(1.00/1.00) + SIDL(1.00/1.00) + LL(0.75) + TL(0.50) + BI(1.00)
ULS-06	DL(1.00/1.00) + SIDL(1.00/1.00) + LL(0.75) + TL(0.50) + FB(1.00)
ULS-07	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(0.20) + TL(0.50) + EQ(1.50)
ULS-08	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(0.20) + TL(0.50) + EQ(0.75)
SLS-01	DL(1.00) + SIDL(1.20/1.00) + LL(1.00) + WL(0.60) + TL(0.60)
SLS-02	DL(1.00) + SIDL(1.20/1.00) + LL(0.75) + WL(1.00) + TL(0.60)
SLS-03	DL(1.00) + SIDL(1.20/1.00) + LL(0.75) + WL(0.60) + TL(1.00)
SLS-04	DL(1.00) + SIDL(1.20/1.00) + LL(0.75) + WL(0.50) + TL(0.50)
SLS-05	DL(1.00) + SIDL(1.20/1.00) + LL(0.20) + WL(0.60) + TL(0.50)

SLS-06	DL(1.00) + SIDL(1.20/1.00) + LL(0.20) + WL(0.50) + TL(0.60)
SLS-07	DL(1.00) + SIDL(1.20/1.00) + LL(0.00) + WL(0.00) + TL(0.50)

Note: All IRC 6 load combinations are auto-generated by OsdagBridge. User-defined custom combinations, if any, are appended.

4 Analysis Results

A grillage model was used for structural analysis. The deck is idealized as a grid of elastic beam elements — longitudinal members represent the composite steel girders with effective slab, and transverse members represent the slab or cross frames. This section summarizes the critical output from that analysis.

Table 4.1: Summary of Maximum Demands

Load Case/ Comb.	Bending Moment			Shear Force			Reaction at Supports	
	Max (kNm)	Girder	Loc. (m)	Max (kN)	Girder	Loc. (m)	Left	Right
SEISMIC_3: 1.0DL + 1.0DW + 0.2LL + 1.5EL	4215.724	G5	17.778	614.872	G1	0.000	-4991.024	3792.062
Envelope SLS	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
SW	775.777	G5	20.741	102.570	G1	38.519	-807.568	807.568
ACCIDENTAL_2: 1.0DL + 1.0DW + 0.75LL	5101.099	G5	17.778	733.928	G1	0.000	-5921.819	4722.857
SLS_QP_2: 1.0DL + 1.0DW	-3991.158	G5	19.259	544.638	G1	0.000	-4155.297	4155.009
1.5 EQ (a)	402.564	G5	19.259	53.575	G1	0.000	418.857	-418.857
BASIC_2: 1.35DL + 1.75DW + 1.15LL + 1.5WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
SEISMIC_2: 1.35DL + 1.75DW + 0.2LL + 0.75EL	4215.724	G5	17.778	614.872	G1	0.000	-4991.024	3792.062
1.5 EQ (c)	1341.879	G5	20.741	178.585	G1	38.519	1396.192	-1396.192
BASIC_1: 1.35DL + 1.75DW + 1.5LL + 0.9WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
BASIC_4: 1.0DL + 1.0DW + 1.5LL + 0.9WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
EQ_X	0.000	—	—	0.000	—	—	0.000	-0.000
EQ_Y	894.586	G5	20.741	119.056	G1	38.519	930.794	-930.794

Load Case/ Comb.	Bending Moment			Shear Force			Reaction at Supports	
	Max (kNm)	Girder	Loc. (m)	Max (kN)	Girder	Loc. (m)	Left	Right
ACCIDENTAL_1: 1.0DL + 1.0DW + 0.75LL	5101.099	G5	17.778	733.928	G1	0.000	-5921.819	4722.857
1.0 DW	496.993	G5	19.259	66.915	G1	0.000	-518.613	518.613
1.0 DL + 1.0 LL	4609.221	G5	17.778	667.013	G1	0.000	-5403.206	4204.244
SLS_RARE_1: 1.0DL + 1.2DW + 1.0LL + 0.6WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
1.0 WL	276.364	G5	20.741	36.780	G1	38.519	287.549	-287.549
WL Longitudinal	0.000	—	—	0.000	—	—	-0.000	0.000
WL Uplift	276.364	G5	20.741	36.780	G1	38.519	287.549	-287.549
SLS_RARE_4: 1.0DL + 1.0DW + 1.0LL + 0.6WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
WL Transverse	0.000	—	—	0.000	—	—	-0.000	0.000
1.5 EQ (b)	402.564	G5	19.259	53.575	G1	38.519	418.857	-418.857
SLS_FREQUENT_3: 1.0DL + 1.2DW + 0.2LL + 0.5WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
Footpath load	239.642	G1	19.259	40.578	G1	0.000	-236.052	235.765
SLS_FREQUENT_5: 1.0DL + 1.0DW + 0.2LL + 0.6WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
1.0 DL	3494.165	G5	19.259	477.723	G1	0.000	-3636.684	3636.396
BASIC_5: 1.0DL + 1.0DW + 1.15LL + 1.5WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
SLS_RARE_3: 1.0DL + 1.2DW + 0.75LL + 0.6WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
SEISMIC_4: 1.0DL + 1.0DW + 0.2LL + 0.75EL	4215.724	G5	17.778	614.872	G1	0.000	-4991.024	3792.062
SLS_FREQUENT_4: 1.0DL + 1.0DW + 0.75LL + 0.5WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307

Load Case/ Comb.	Bending Moment			Shear Force			Reaction at Supports	
	Max (kNm)	Girder	Loc. (m)	Max (kN)	Girder	Loc. (m)	Left	Right
BASIC_6: 1.0DL + 1.0DW + 1.15LL + 0.9WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
Envelope ULS	5101.099	G5	17.778	733.928	G1	0.000	-5921.819	4722.857
BASIC_3: 1.35DL + 1.75DW + 1.15LL + 0.9WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
SLS_FREQUENT_2: 1.0DL + 1.2DW + 0.2LL + 0.6WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
SEISMIC_1: 1.35DL + 1.75DW + 0.2LL + 1.5EL	4215.724	G5	17.778	614.872	G1	0.000	-4991.024	3792.062
SLS_RARE_6: 1.0DL + 1.0DW + 0.75LL + 0.6WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
SLS_RARE_5: 1.0DL + 1.0DW + 0.75LL + 1.0WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
EQ_Z	0.000	—	—	0.000	—	—	0.000	-0.000
SLS_QP_1: 1.0DL + 1.2DW	-3991.158	G5	19.259	544.638	G1	0.000	-4155.297	4155.009
DD	2484.965	G5	20.741	334.575	G1	38.519	-2593.064	2593.064
ACCIDENTAL_3: 1.0DL + 1.0DW + 0.75LL	5101.099	G5	17.778	733.928	G1	0.000	-5921.819	4722.857
SLS_FREQUENT_6: 1.0DL + 1.0DW + 0.2LL + 0.5WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
Crash barrier load	142.917	G1	20.741	22.722	G1	38.519	-138.745	143.845
SLS_RARE_2: 1.0DL + 1.2DW + 0.75LL + 1.0WL	4827.581	G5	17.778	697.148	G1	0.000	-5634.269	4435.307
Railing load	32.374	G1	20.741	5.837	G1	38.519	-30.424	31.542


Table 4.2: Reactions at Supports

Load Case	Left Support (kN)	Right Support (kN)

Table 4.3: Deflection Summary (Live Load & Total Load)


parameter	value
Deflection due to Live Load, δ_{LL}	16.729 mm
Allowable Live Load Deflection (Δ_{allow})	$L/800 = 50.0$ mm
Live Load Deflection Check Status	PASS
Deflection due to Total Load, δ_{total}	70.142 mm
Allowable Total Deflection (Δ_{allow})	$L/600 = 66.7$ mm
Total Load Deflection Check Status	FAIL

Bending Moment Diagram — M_z (kNm)

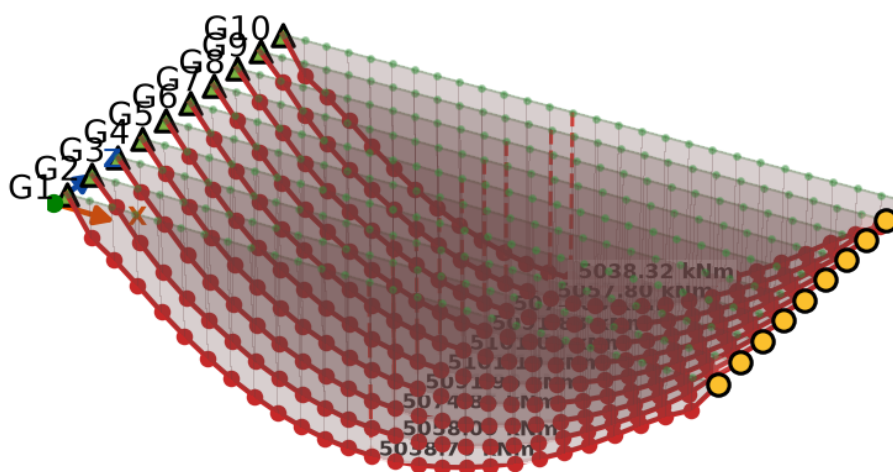


Bending Moment Envelope (Envelope ULS): Max/min BM along span. X-axis: distance from left support (m). Y-axis: Bending Moment (kN-m).

Shear Force Diagram — V_y (kN)

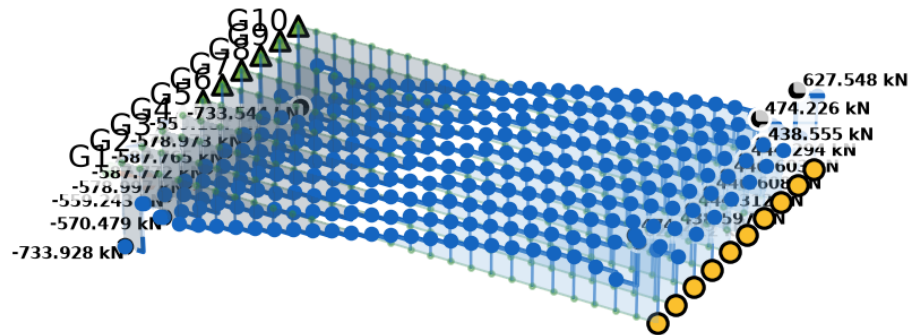

Shear Force Envelope (Envelope ULS): Max/min SF along span. X-axis: distance from left support (m). Y-axis: Shear Force (kN).

Deflection Diagram — D_y (mm)

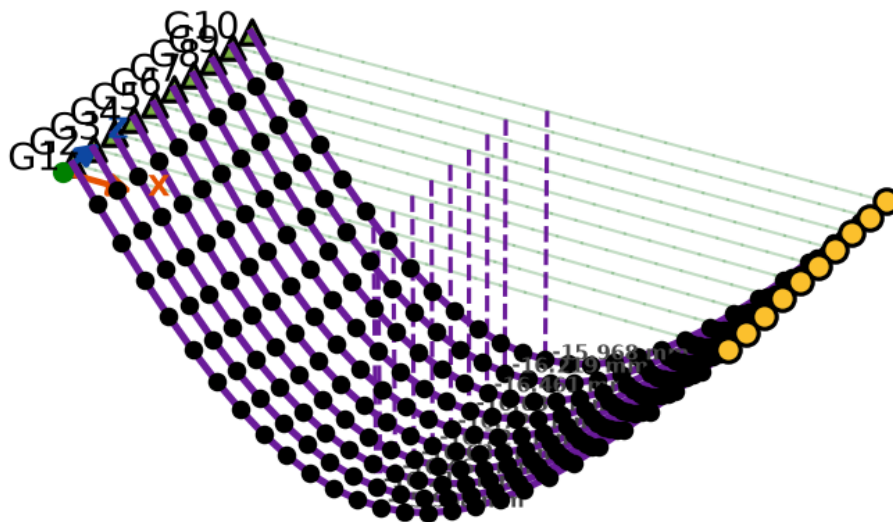

Vertical Deflection D_y (1.0 LL): Maximum deflection along span. Load Case: 1.0 LL, Combination: D_y . Nodes shown. Isometric view.

5 Design Checks

This section presents all structural design checks performed by OsdagBridge. For each member, the demand from the governing load combination, the code-based capacity, and the utilization ratio are tabulated. All checks reference IS 800:2007 and IRC 22:2014 unless stated otherwise.

5.1 Plate Girder Design

Table 5.1: Girder Section Properties (Final Optimized / User-selected)

Girder	Property	Value
G1	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0
	Gross Area, A (cm ²)	688.72
	Moment of Inertia, I_z (cm ⁴)	6146137.7
	Elastic Section Modulus, Z_{ez} (cm ³)	51312.94
	Plastic Section Modulus, Z_{pz} (cm ³)	60611.97
	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm ⁴)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9
G2	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0

	Gross Area, A (cm^2)	688.72
	Moment of Inertia, I_z (cm^4)	6146137.7
	Elastic Section Modulus, Z_{ez} (cm^3)	51312.94
	Plastic Section Modulus, Z_{pz} (cm^3)	60611.97
	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm^4)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9
G3	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0
	Gross Area, A (cm^2)	688.72
	Moment of Inertia, I_z (cm^4)	6146137.7
	Elastic Section Modulus, Z_{ez} (cm^3)	51312.94
	Plastic Section Modulus, Z_{pz} (cm^3)	60611.97
	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm^4)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9
G4	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0
	Gross Area, A (cm^2)	688.72

	Moment of Inertia, I_z (cm ⁴)	6146137.7
	Elastic Section Modulus, Z_{ez} (cm ³)	51312.94
	Plastic Section Modulus, Z_{pz} (cm ³)	60611.97
	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm ⁴)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9
G5	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0
	Gross Area, A (cm ²)	688.72
	Moment of Inertia, I_z (cm ⁴)	6146137.7
	Elastic Section Modulus, Z_{ez} (cm ³)	51312.94
	Plastic Section Modulus, Z_{pz} (cm ³)	60611.97
	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm ⁴)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9
G6	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0
	Gross Area, A (cm ²)	688.72
	Moment of Inertia, I_z (cm ⁴)	6146137.7

	Elastic Section Modulus, Z_{ez} (cm ³)	51312.94
	Plastic Section Modulus, Z_{pz} (cm ³)	60611.97
	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm ⁴)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9
G7	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0
	Gross Area, A (cm ²)	688.72
	Moment of Inertia, I_z (cm ⁴)	6146137.7
	Elastic Section Modulus, Z_{ez} (cm ³)	51312.94
	Plastic Section Modulus, Z_{pz} (cm ³)	60611.97
	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm ⁴)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9
G8	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0
	Gross Area, A (cm ²)	688.72
	Moment of Inertia, I_z (cm ⁴)	6146137.7
	Elastic Section Modulus, Z_{ez} (cm ³)	51312.94

	Plastic Section Modulus, Z_{pz} (cm ³)	60611.97
	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm ⁴)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9
G9	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0
	Gross Area, A (cm ²)	688.72
	Moment of Inertia, I_z (cm ⁴)	6146137.7
	Elastic Section Modulus, Z_{ez} (cm ³)	51312.94
	Plastic Section Modulus, Z_{pz} (cm ³)	60611.97
	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm ⁴)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9
G10	Depth, D (mm)	2230.0
	Top Flange Width, b_f (mm)	670.0
	Bottom Flange Width, b_f (mm)	670.0
	Top Flange Thickness, t_f (mm)	28.0
	Bottom Flange Thickness, t_f (mm)	36.0
	Web Thickness, t_w (mm)	12.0
	Gross Area, A (cm ²)	688.72
	Moment of Inertia, I_z (cm ⁴)	6146137.7
	Elastic Section Modulus, Z_{ez} (cm ³)	51312.94
	Plastic Section Modulus, Z_{pz} (cm ³)	60611.97

	Effective Slab Width, b_{eff} (mm)	2465.0
	Transformed Composite I_z (cm ⁴)	12744684.35
	Depth to Plastic Neutral Axis (mm)	430.9

Table 5.2: Girder Section Classification

	Element	Slenderness Ratio	Class Limit	Classification
G1	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender
G2	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender
G3	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender
G4	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender
G5	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender
G6	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender
G7	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender

G8	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender
G9	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender
G10	Top Flange	11.75	11.49	Slender
	Web	180.5	106.49	Slender
	Overall Section	—	—	Slender

Note: IS 800:2007 Table 2

Table 5.3: Moment Capacity Check

	Parameter	Formula	Value	Status
G1	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
G2	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
G3	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
G4	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—

	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
G5	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
G6	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
G7	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
G8	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
G9	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
G10	Applied Moment, M_u	Governing LC (ULS)	6034.31 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	27280.03 kN-m	—

	Utilization Ratio, M_u/M_d	M_u/M_d	0.22	PASS
--	---------------------------------	-----------	------	------

Note: IRC 22 Cl. 603.3.1, IS 800 Cl. 8.2.1

Table 5.4: Shear Capacity Check

	Parameter	Formula	Value	Status
G1	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS
G2	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS

G3	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS
G4	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS
G5	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—

	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS
G6	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS
G7	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—

	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS
G8	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS
G9	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS
G10	Applied Shear, V_u	Governing LC (ULS)	643.86 kN	—
	Shear Area, A_v	$d_w \times t_w$	25992.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.505	—

	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.116	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	2.262	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	39.48 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	932.88 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.69	PASS

Note: IS 800 Cl. 8.4, IRC 22 Cl. 603.3.3.2

Table 5.5: Interaction Checks (M-V and M-N)

	Check	Condition	Value	Status
G1	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS
G2	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS
G3	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS

	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS
G4	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS
G5	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS
G6	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS
G7	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS

G8	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS
G9	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS
G10	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	27280.03 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.23	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.22 = 0.225$	0.225	PASS

Note: IRC 22 Cl. 603.3.3.3

Table 5.6: Lateral Torsional Buckling Check – Construction Stage

	Parameter	Formula	Value	Status
G1	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.38	PASS
G2	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.38	PASS
G3	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.38	PASS
G4	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—

	$M_u \leq M_b$	M_u/M_b	0.38	PASS
G5	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.38	PASS
G6	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.38	PASS
G7	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.38	PASS
G8	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—

	$M_u \leq M_b$	M_u/M_b	0.38	PASS
G9	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.38	PASS
G10	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	384229.83 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.216	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	19285.63 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.38	PASS

Note: IRC 22 Cl. 603.3.3.1, IS 800 Cl. 8.2.2

Table 5.7: Stiffener Design Summary

G1	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0
	Intermediate Stiffener Spacing (mm)	3260.0
	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No
G2	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0
	Intermediate Stiffener Spacing (mm)	3260.0
	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No
G3	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0
	Intermediate Stiffener Spacing (mm)	3260.0
	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No
G4	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0
	Intermediate Stiffener Spacing (mm)	3260.0

	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No
G5	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0
	Intermediate Stiffener Spacing (mm)	3260.0
	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No
G6	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0
	Intermediate Stiffener Spacing (mm)	3260.0
	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No
G7	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0
	Intermediate Stiffener Spacing (mm)	3260.0
	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No
G8	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0

	Intermediate Stiffener Spacing (mm)	3260.0
	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No
G9	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0
	Intermediate Stiffener Spacing (mm)	3260.0
	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No
G10	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	10.0
	Intermediate Stiffener Spacing (mm)	3260.0
	End Panel Stiffener Thickness (mm)	10.0
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	No

Table 5.8: Intermediate Stiffener Checks

	Check	Required	Provided	Status
G1	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS
G2	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS
G3	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS
G4	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS
G5	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS
G6	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS
G7	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS

G8	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS
G9	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS
G10	Min. Moment of Inertia, I_s	2807136.0 mm ⁴	241763167.0 mm ⁴	PASS
	Buckling Resistance, $F_{qd} \geq F_q$	0.0 kN	4129.35 kN	PASS

Note: IS 800 Cl. 8.7.1.2

Table 5.9: End Panel Stiffener Checks

	Check	Required	Provided	Status
G1	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS
	Bearing Capacity	733.93 kN	4136.36 kN	PASS
	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS
G2	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS
	Bearing Capacity	733.93 kN	4136.36 kN	PASS
	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS
G3	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS

	Bearing Capacity	733.93 kN	4136.36 kN	PASS
	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS
G4	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS
	Bearing Capacity	733.93 kN	4136.36 kN	PASS
	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS
G5	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS
	Bearing Capacity	733.93 kN	4136.36 kN	PASS
	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS
G6	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS
	Bearing Capacity	733.93 kN	4136.36 kN	PASS
	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS
G7	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS
	Bearing Capacity	733.93 kN	4136.36 kN	PASS
	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS
G8	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS
	Bearing Capacity	733.93 kN	4136.36 kN	PASS

	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS
G9	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS
	Bearing Capacity	733.93 kN	4136.36 kN	PASS
	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS
G10	Web Buckling Resistance	733.93 kN	207590.22 kN	PASS
	Local Crushing Resistance	733.93 kN	894.29 kN	PASS
	Bearing Capacity	733.93 kN	4136.36 kN	PASS
	Column Buckling Resistance	733.93 kN	3900.91 kN	PASS

Note: IS 800 Cl. 8.4.2.2

Table 5.10: Serviceability – Deflection Checks

	Check	Allowable	Actual	Status
G1	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	15.968	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	68.667	FAIL
G2	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	16.219	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	69.198	FAIL
G3	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	16.461	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	69.648	FAIL
G4	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	16.636	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	69.972	FAIL
G5	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	16.729	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	70.142	FAIL
G6	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	16.729	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	70.141	FAIL

G7	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	16.636	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	69.970	FAIL
G8	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	16.461	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	69.644	FAIL
G9	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	16.219	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	69.193	FAIL
G10	Live Load Deflection, δ_{LL} (mm)	$L/800 = 50.0$ mm	15.968	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 66.7$ mm	68.660	FAIL

Note: IRC 22 Cl. 604.3.2

Table 5.11: Serviceability – Maximum Stress Limitation

	Element	Allowable Stress	Actual Stress	Status
G1	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS
G2	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS
G3	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS
G4	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS
G5	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS
G6	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS
G7	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS
G8	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS
G9	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS
G10	Structural Steel ($0.9 f_y$)	315.00 MPa	88.37 MPa	PASS

Table 5.12: Serviceability – Fatigue Assessment

	Stress Range, $\Delta\sigma$ (MPa)	Fatigue Limit, f_{fd} (MPa)	Utilization Ratio	Status
G1	138.80 MPa	84.44 MPa	1.64	FAIL
G2	115.90 MPa	84.44 MPa	1.37	FAIL
G3	116.35 MPa	84.44 MPa	1.38	FAIL
G4	116.81 MPa	84.44 MPa	1.38	FAIL
G5	117.22 MPa	84.44 MPa	1.39	FAIL
G6	117.43 MPa	84.44 MPa	1.39	FAIL
G7	117.43 MPa	84.44 MPa	1.39	FAIL
G8	117.21 MPa	84.44 MPa	1.39	FAIL
G9	116.81 MPa	84.44 MPa	1.38	FAIL
G10	116.34 MPa	84.44 MPa	1.38	FAIL

Note: IRC 22 Cl. 605 — governing of normal and shear fatigue (worst by DCR). Capacity reduction factor μ_r applied where plate thickness ≥ 25 mm.

Table 5.13: Girder Design Summary (DCR / Utilization Ratio)

Girder	Controlling LC / Combination	Controlling Check	Demand	Capacity	UR	Status
G1	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL
G2	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL
G3	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL
G4	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL
G5	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL
G6	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL
G7	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL
G8	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL
G9	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL
G10	SW	Int.Stiff: Leg H.limit	325.00 mm	169.03 mm	1.923	FAIL

Note: UR = Demand / Capacity. A value ≤ 1.0 indicates a passing check. The controlling check is the criterion with the highest UR for each girder, with the real load case/combination that drives it.

Table 5.14: Shear Connector Capacity

Parameter	Formula	Value	Reference
Design Resistance, Q_u	$Q_u = \min(Q_{u,s}, Q_{u,c})$ $Q_{u,s} = \frac{0.8 f_u (\pi d^2 / 4)}{\gamma_v}$ $Q_{u,c} = \frac{0.29 \alpha d^2 \sqrt{f_{ck} E_{cm}}}{\gamma_v}$	95.36 kN	IRC 22 Cl. 606.3.1 (Eq. 6.1)
Fatigue Shear Resistance, Q_r	IRC 22 Table 8 ($\phi d, N_{sc}$)	25.00 kN	IRC 22 Cl. 606.3.2 (Table 8)

Table 5.15: Shear Connector Spacing

Criterion	Governing Spacing	Actual Spacing Provided	Status
ULS Shear (SL1)	1213.9 mm	400.0 mm	PASS
Full Composite (SL2)	429.9 mm	400.0 mm	PASS
SLS Fatigue (SR)	569.2 mm	400.0 mm	PASS
Max Spacing Limit (IRC 22)	400.0 mm	400.0 mm	PASS

Note: IRC 22 Cl. 606.4, 606.9. Governing spacing = $\min(S_{L1}, S_{L2}, S_R)$.

Table 5.16: Transverse Shear and Detailing Checks

Check	Value	Status
Longitudinal Shear per unit length, V_L	157.12 kN/m	—
Transverse Shear Capacity of Slab, V_{Rd}	999.28 kN/m	—
Transverse Shear Check	$V_L/V_{Rd} = 0.16$	PASS
Min. Transverse Reinforcement, $A_{st,min}$	Required 0.79 cm ² /m, Provided 12.21 cm ² /m	PASS
Stud Diameter $\leq 2t_f$	$d = 20.0 \text{ mm} \leq 2t_f = 56.0 \text{ mm}$	PASS
Stud Edge Distance	Provided 275.0 mm (req. $\geq 25.0 \text{ mm}$)	PASS

Note: IRC 22 Cl. 606.6, 606.10.

5.2 Deck Slab Design

The reinforced concrete deck slab is designed per IRC 112:2011 (flexure, shear, crack width) and IRC 22:2014 (composite construction). Wheel loads are distributed using Pigeaud's method. The deck is checked for flexure in the transverse and longitudinal directions, punching shear, one-way (beam) shear, crack width, and reinforcement detailing.

Table 5.17: Deck Slab — Loading and Geometry

Effective Span of Deck Slab, l_{eff}	2465 mm (girder spacing, c/c)
Deck Thickness, t_s	250.0 mm
Clear Cover (IRC 112 Cl. 15.2)	Top 50 / Bottom 50 mm
Concrete Grade (IRC 112 Cl. 6.4)	M40 ($f_{ck} = 40.0$ MPa, $f_{ctm} = 3.0$ MPa)
Reinforcement Grade (IRC 112 Cl. 6.2)	Fe 500 ($f_y = 500$ MPa)
Dead Load per Unit Area, w_{DL}	6.13 kN/m ² (slab self-weight)
IRC 6 Wheel Load (Class A / 70R)	83.4 kN
Tyre Contact Width (IRC 6 Annex A)	300 mm (transverse)
Impact Factor (IRC 6 Cl. 208.2)	1.100
Governing Live Load Case	Class70R(W)

Table 5.18: Deck Slab — Flexure Check: Interior Panel (Pigeaud's Method)

Location	Parameter	Formula / Reference	Value	Status
At Midspan (Sagging)	Transverse BM (DL), $M_{T,DL}$	$w_{DL} l_{eff}^2/10$	3.73 kN-m/m	—
	Transverse BM (LL), $M_{T,LL}$	Effective width (IRC 112 B3.1)	27.65 kN-m/m	—
	Total Design BM, $M_{u,sag}$	1.35 DL + 1.50 LL	50.65 kN-m/m	—
	Effective depth, d	$t_s - c_{nom} - \phi/2$	194.0 mm	—
	Moment Capacity, M_{Rd}	IRC 112 Cl. 12.2	56.89 kN-m/m	PASS
At Support (Hogging)	Total Design BM, $M_{u,hog}$	1.35 DL + 1.50 LL (at support)	37.99 kN-m/m	—
	Required Top Steel, $A_{st,top}$	$M_u/(0.87 f_y d)$	489 mm ² /m	—
	Moment Capacity, M_{Rd}	IRC 112 Cl. 12.2	41.92 kN-m/m	PASS

Note: IRC 112 Cl. 12.2. Distribution (longitudinal) reinforcement designed for 20% of main steel moment (IRC 21 Cl. 305.18).

Table 5.19: Deck Slab — Cantilever Overhang Flexure Check

Parameter	Formula	Value	Status
Overhang Length, l_{oh}	—	1.2325 m	—
Crash Barrier Load Moment	IRC 6 Cl. 206.4	7.50 kN-m/m	—
Dead Load Moment	$w_{DL} l_{oh}^2/2 + \text{railing}$	6.47 kN-m/m	—
Live Load Moment (eccentric wheel)	Wheel load $\times$ arm	53.13 kN-m/m	—
Total Hogging Moment, $M_{u,oh}$	1.35 DL + 1.50 (LL + CB)	107.65 kN-m/m	—
Moment Capacity (top steel), $M_{Rd,oh}$	IRC 112 Cl. 12.2	114.71 kN-m/m	PASS

Note: IRC 6 Cl. 206.4 crash barrier loads applied at kerb face; IRC 112 Cl. 12.2 flexure.

Table 5.20: Deck Slab — Punching Shear Check (IRC 112 Cl. 10.4.6)

Parameter	Formula / Reference	Value	Status
Design Wheel Load (ULS), V_{Ed}	$\gamma_Q (1 + IF) P_w$	137.6 kN	—
Tyre Contact Area	$a \times b$ (IRC 6 Annex A)	300×150 mm	—
Loaded Area at mid-depth, b_0	$c_1 \times c_2$ (incl. WC dispersion)	400×250 mm	—
Control Perimeter, u_1	$2(c_1 + c_2) + 4\pi d$	3738 mm	—
Punching Shear Stress, v_{Ed}	$V_{Ed}/(u_1 d)$	0.190 MPa	—
Punching Resistance, $v_{Rd,c}$	IRC 112 Eq. 10.1	0.555 MPa	—
Punching Shear Check	$v_{Ed} \leq v_{Rd,c}$	0.34	PASS

Note: Punching shear reinforcement not typically required for deck slabs with $d \geq 200$ mm and adequate longitudinal reinforcement.

Table 5.21: Crack Width Check (Deck Slab)

Parameter	Value / Reference
Min. Reinforcement for Crack Control, $A_{s,min}$	303 mm ² /m [IRC 112 Cl. 16.5.1]
Provided Reinforcement (bottom)	$\phi 12$ @ 160 mm c/c (707 mm ² /m)
Max. Permissible Crack Width	0.30 mm
Calculated Crack Width, w_k (governing)	0.2227 mm
Crack Width Check	PASS

Table 5.22: One-Way (Beam) Shear Check (Deck Slab)

Parameter	Formula / Reference	Value	Status
Design Shear per unit width, V_{Ed}	$\gamma_{DL}V_{DL} + \gamma_{LL}(1+IF)V_{LL}$	84.23 kN/m	—
Effective depth, d	$t_s - c_{nom} - \phi/2$	194.0 mm	—
Size factor, k	$1 + \sqrt{200/d} \leq 2.0$	2.000	—
Long. reinforcement ratio, ρ_l	$A_{sl}/(b_w d) \leq 0.02$	0.0036	—
Shear resistance (no stirrups), $V_{Rd,c}$	$v_{Rd,c} b_w d$ (Cl. 10.3.2)	107.58 kN/m	—
One-Way Shear Check	$V_{Ed} \leq V_{Rd,c}$	0.78	PASS

Note: IRC 112 Cl. 10.3.2. Shear reinforcement not provided in deck slabs; capacity relies on concrete and main reinforcement.

Table 5.23: Reinforcement Detailing Summary (Deck Slab)

Parameter	Required / Limit	Provided	Status
Main Reinforcement — Bottom (Transverse)			
Required Area, $A_{st,req}$ (mm ² /m)	660 mm ² /m	707 mm ² /m	PASS
Bar Diameter × Spacing	$\phi \geq 10$ mm (IRC 112)	$\phi 12$ @ 160 mm c/c	—
Min. Reinforcement $A_{s,min}$ (IRC 112 Cl. 16.3.1)	303 mm ² /m	707 mm ² /m	PASS
Max. Bar Spacing (IRC 112 Cl. 16.3.2)	300 mm	160 mm	PASS
Distribution Reinforcement — Longitudinal			
Required Area, $A_{st,dist}$ (mm ² /m)	$\geq 20\%$ of main steel	377 mm ² /m	PASS
Top Reinforcement (Support / Cantilever Overhang)			
Required Area, $A_{st,top}$ (mm ² /m)	489 mm ² /m	514 mm ² /m	PASS
Cover and Detailing			
Clear Cover (IRC 112 Cl. 15.2)	≥ 50 mm (Table 14.2)	Top 50 / Bottom 50 mm	PASS

Note: IRC 112 Cl. 16.3, IS 456 Cl. 26.5. All reinforcement provisions satisfy strength and detailing requirements.

5.3 Cross Bracing Design

Cross bracing between adjacent plate girders provides lateral stability during construction, resists transverse loads (wind, seismic, braking) in service, and prevents lateral torsional buckling of the girders. Members are designed per IS 800:2007 Cl. 7 (compression) and Cl. 6 (tension). Forces are derived from the grillage model under the governing load combination (DL + LL + WL).

Table 5.24: Cross Bracing — Connection and Section Properties

Panel	Member	Connection	Section	A_g (mm ²)	r_{min} (mm)
G1-G2	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G1-G2	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G2-G3	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G2-G3	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G3-G4	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G3-G4	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G4-G5	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G4-G5	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G5-G6	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G5-G6	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G6-G7	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G6-G7	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G7-G8	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G7-G8	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G8-G9	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G8-G9	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0

G9-G10	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G9-G10	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0

Note: A_g = gross cross-sectional area; r_{min} = minimum radius of gyration.

Table 5.25: Cross Bracing — Slenderness Ratio Check (IS 800 Cl. 3.8)

Panel	Member	Nature	Eff. Length KL (mm)	KL/r	Limit / Status
G1-G2	Diagonal	C	3110	147.6	250 — PASS
	Top chord	C	2465	131.3	250 — PASS
	Bottom chord	T	2465	131.3	400 — PASS
G2-G3	Diagonal	C	3110	146.5	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G3-G4	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G4-G5	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G5-G6	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G6-G7	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS

	Bottom chord	T	2465	130.3	400 — PASS
G7-G8	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G8-G9	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G9-G10	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS

Note: 3. Limit = 250 for compression members, 400 for tension members. $K = 1.0$ for members with both ends pinned.

Table 5.26: Cross Bracing Design — Capacity Summary

Panel	Member	Section	Governing LC	Demand (kN)	Capacity (kN)	UR	Status
G1-G2	Diagonal	40 x 40 x 3	1.5 EQ (a)	30.725	45.000	0.680	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	24.356	45.000	0.540	PASS
G2-G3	Diagonal	40 x 40 x 3	1.5 EQ (a)	24.282	45.000	0.540	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	19.249	45.000	0.430	PASS
G3-G4	Diagonal	40 x 40 x 3	1.5 EQ (a)	22.872	45.000	0.510	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	18.131	45.000	0.400	PASS
G4-G5	Diagonal	40 x 40 x 3	1.5 EQ (a)	22.436	45.000	0.500	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	17.786	45.000	0.400	PASS
G5-G6	Diagonal	40 x 40 x 3	1.5 EQ (a)	22.734	45.000	0.510	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	18.022	45.000	0.400	PASS
G6-G7	Diagonal	40 x 40 x 3	1.5 EQ (a)	23.702	45.000	0.530	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	18.789	45.000	0.420	PASS
G7-G8	Diagonal	40 x 40 x 3	1.5 EQ (a)	25.348	45.000	0.560	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	20.094	45.000	0.450	PASS
G8-G9	Diagonal	40 x 40 x 3	1.5 EQ (a)	27.788	45.000	0.620	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	22.029	45.000	0.490	PASS
G9-G10	Diagonal	40 x 40 x 3	1.5 EQ (a)	31.405	45.000	0.700	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	24.896	45.000	0.550	PASS

Note: Designed per IS 800 Cl. 7 (compression) and Cl. 6 (tension). OsdagBridge cross-bracing module used.

5.4 End Diaphragm Design

End diaphragms at the supports transfer transverse loads to the bearings, restrain the bottom flanges against lateral displacement, and maintain the girder cross-section geometry during construction and in service. They are designed per IS 800:2007 and IRC 24:2010 Cl. 507.

Table 5.27: End Diaphragm — Connection and Section Properties

Panel	Member	Connection	Section	A_g (mm ²)	r_{min} (mm)
G1-G2	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G1-G2	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G2-G3	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G2-G3	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G3-G4	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G3-G4	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G4-G5	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G4-G5	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G5-G6	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G5-G6	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G6-G7	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G6-G7	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G7-G8	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G7-G8	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G8-G9	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G8-G9	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0

G9-G10	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
G9-G10	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0

Note: A_g = gross cross-sectional area; r_{min} = minimum radius of gyration.

Table 5.28: End Diaphragm — Slenderness Ratio Check (IS 800 Cl. 3.8)

Panel	Member	Nature	Eff. Length KL (mm)	KL/r	Limit / Status
G1-G2	Diagonal	C	3110	147.6	250 — PASS
	Top chord	C	2465	131.3	250 — PASS
	Bottom chord	T	2465	131.3	400 — PASS
G2-G3	Diagonal	C	3110	146.5	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G3-G4	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G4-G5	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G5-G6	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G6-G7	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS

	Bottom chord	T	2465	130.3	400 — PASS
G7-G8	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G8-G9	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS
G9-G10	Diagonal	C	3110	164.3	250 — PASS
	Top chord	C	2465	130.3	250 — PASS
	Bottom chord	T	2465	130.3	400 — PASS

Note: 3. Limit = 250 for compression members, 400 for tension members. $K = 1.0$ for members with both ends pinned.

Table 5.29: End Diaphragm Design — Capacity Summary

Panel	Member	Section	Governing LC	Demand (kN)	Capacity (kN)	UR	Status
G1-G2	Diagonal	40 x 40 x 3	1.5 EQ (a)	30.725	45.000	0.680	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	24.356	45.000	0.540	PASS
G2-G3	Diagonal	40 x 40 x 3	1.5 EQ (a)	24.282	45.000	0.540	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	19.249	45.000	0.430	PASS
G3-G4	Diagonal	40 x 40 x 3	1.5 EQ (a)	22.872	45.000	0.510	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	18.131	45.000	0.400	PASS
G4-G5	Diagonal	40 x 40 x 3	1.5 EQ (a)	22.436	45.000	0.500	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	17.786	45.000	0.400	PASS
G5-G6	Diagonal	40 x 40 x 3	1.5 EQ (a)	22.734	45.000	0.510	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	18.022	45.000	0.400	PASS
G6-G7	Diagonal	40 x 40 x 3	1.5 EQ (a)	23.702	45.000	0.530	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	18.789	45.000	0.420	PASS
G7-G8	Diagonal	40 x 40 x 3	1.5 EQ (a)	25.348	45.000	0.560	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	20.094	45.000	0.450	PASS
G8-G9	Diagonal	40 x 40 x 3	1.5 EQ (a)	27.788	45.000	0.620	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	22.029	45.000	0.490	PASS
G9-G10	Diagonal	40 x 40 x 3	1.5 EQ (a)	31.405	45.000	0.700	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	24.896	45.000	0.550	PASS

Note: Designed per IS 800 Cl. 7 (compression) and Cl. 6 (tension). OsdagBridge cross-bracing module used.

5.5 Overall Design Check Summary

Table 5.30: Overall Design Check Summary — All Members

Member / Check	Governing Load Combo	Demand	Capacity	UR
Girder — Moment	ACCIDENTAL_1: 1.0DL + 1.0DW + 0.75LL	6034.31 kNm	27280.03 kNm	0.22
Girder — Shear	ACCIDENTAL_1: 1.0DL + 1.0DW + 0.75LL	733.93 kN	932.88 kN	0.79
Girder — LTB (constr.)	SW	921.18 kNm	2398.79 kNm	0.38
Girder — Deflection	1.0 DL + 1.0 LL	32.87 mm	66.67 mm	0.49
Girder — Stress	SLS_RARE_1: 1.0DL + 1.2DW + 1.0LL + 0.6WL	88.37 MPa	315.00 MPa	0.28
Girder — Fatigue	SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	138.80 MPa	84.44 MPa	1.64
Transverse Shear (slab)	—	—	—	—
Crack Width (slab)	SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	0.223 mm	0.300 mm	0.74
Deck — Flexure (sagging)	Basic ULS: 1.35DL + 1.5LL	50.65 kN-m/m	56.89 kN-m/m	0.89
Deck — Flexure (hogging)	Basic ULS: 1.35DL + 1.5LL	37.99 kN-m/m	41.92 kN-m/m	0.91
Deck — Cantilever Overhang	Basic ULS: 1.35DL + 1.5LL	107.65 kN-m/m	114.71 kN-m/m	0.94
Deck — Punching Shear	Basic ULS: 1.35DL + 1.5LL	0.19 MPa	0.55 MPa	0.34
Deck — One-Way Shear	Basic ULS: 1.35DL + 1.5LL	84.23 kN/m	107.58 kN/m	0.78
Cross Bracing — Compression	1.5 EQ (b)	11.83 kN	12.070 kN	0.98
Cross Bracing — Tension	1.5 EQ (a)	31.50 kN	45.000 kN	0.70

Cross Bracing — Slenderness	—	164.3	250	0.66
End Diaphragm — Moment	1.5 EQ (b)	11.83 kN	12.070 kN	0.98
End Diaphragm — Shear	1.5 EQ (a)	31.50 kN	45.000 kN	0.70

Note: $UR = Demand / Capacity$. All values ≤ 1.0 indicate passing checks. The governing check for each component is highlighted in the individual design check sections above.

6 Drawings and Visualizations

This section presents CAD-generated views of the designed bridge and its components. All views are generated automatically by OsdagBridge using pythonOCC.

6.1 Bridge Configuration and Layout

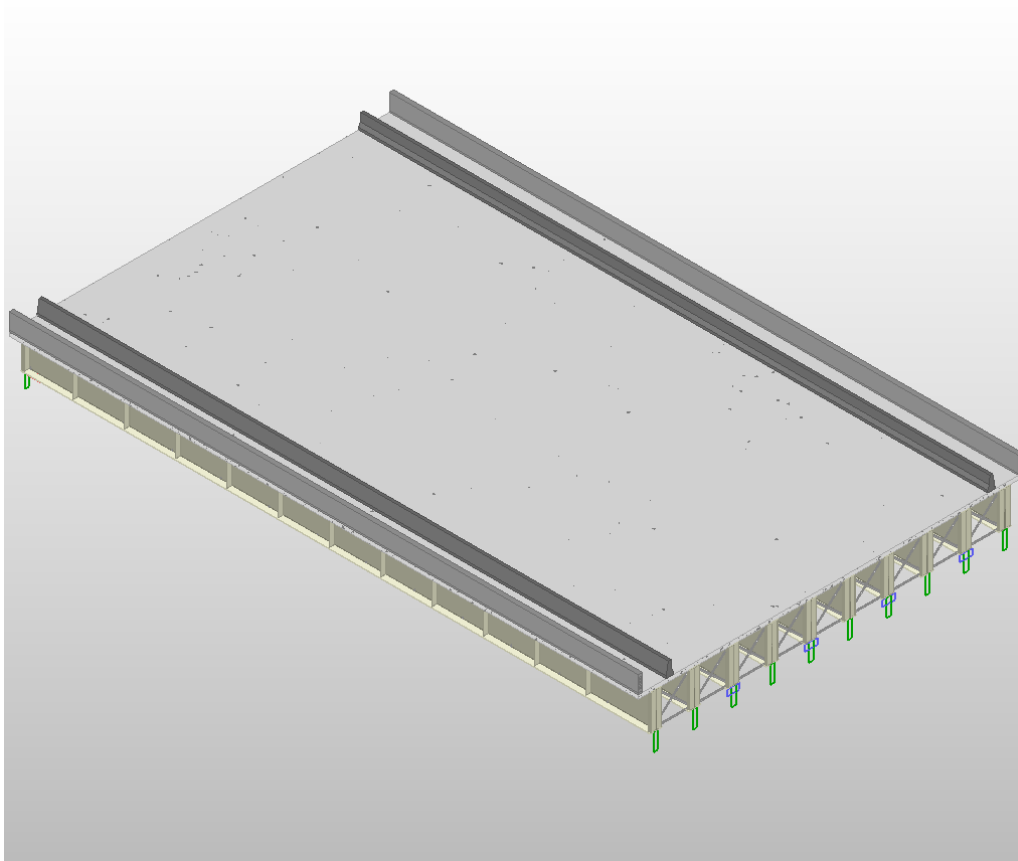


Figure 6.1: Overall 3D Bridge Superstructure

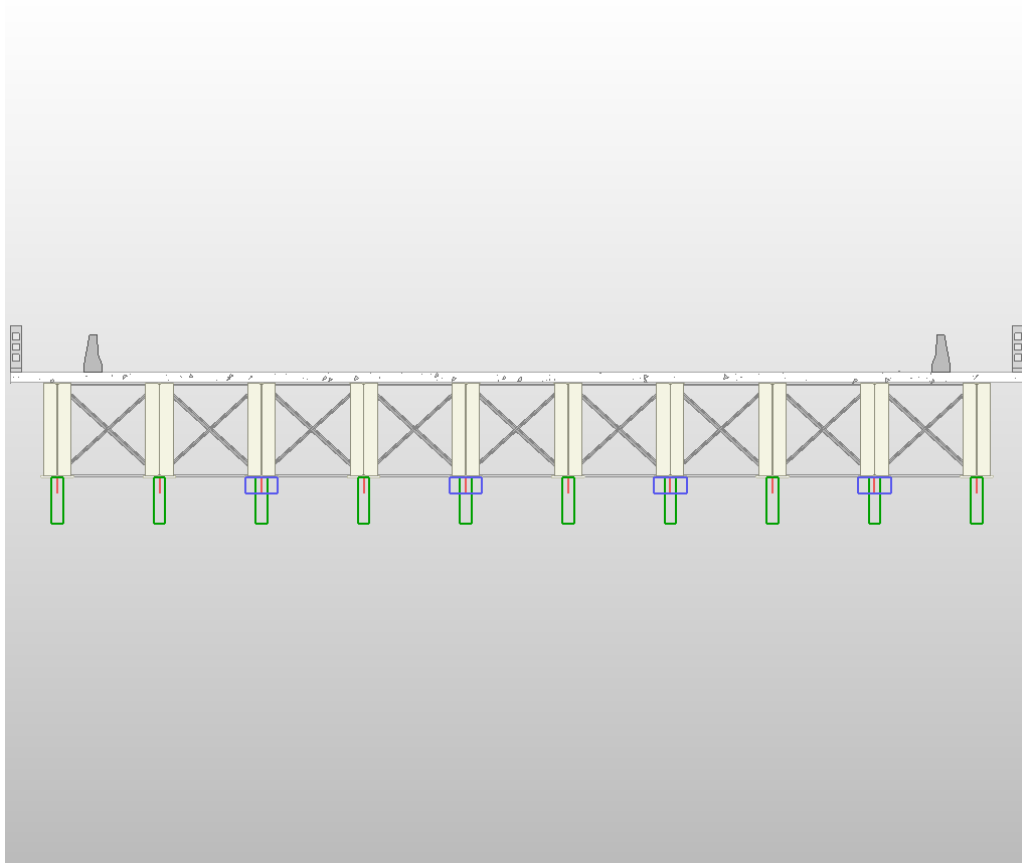


Figure 6.2: Typical Cross Section

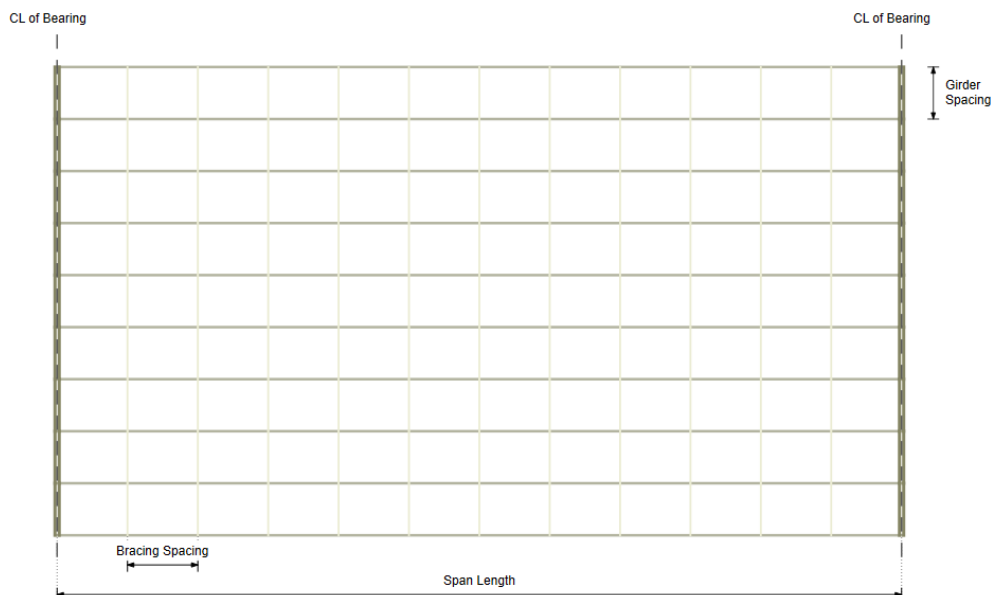


Figure 6.3: Top View

6.2 Plate Girder — Detailed Views

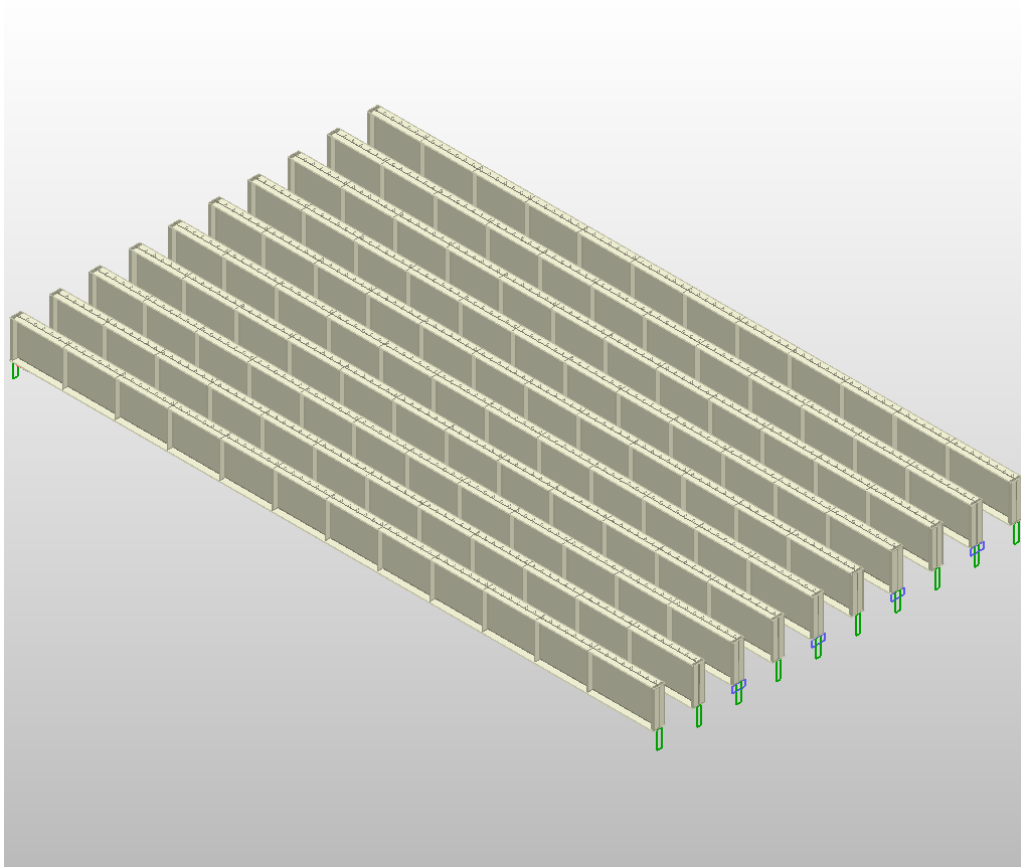


Figure 6.4: 3D View of Plate Girders

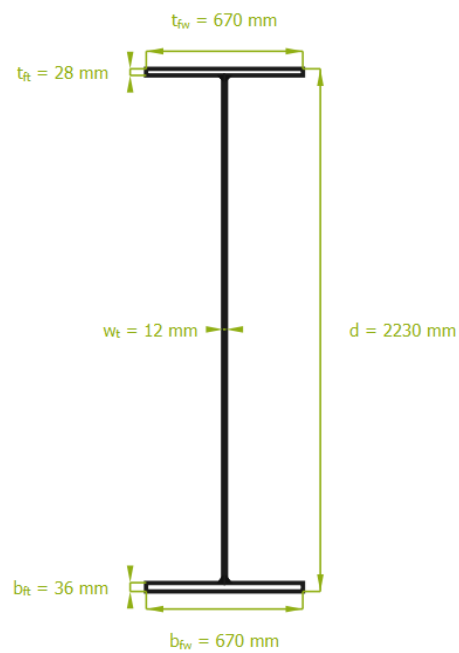


Figure 6.5: Cross Section of Plate Girder



Figure 6.6: Side View of Girder

6.3 Cross Bracing Detail

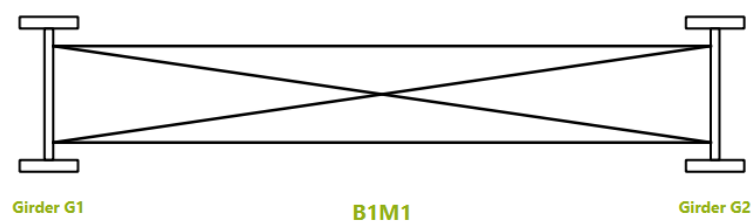


Figure 6.7: Cross Bracing Layout




Figure 6.8: Cross Bracing – Bracing Section




Figure 6.9: Cross Bracing – Top Chord Section




Figure 6.10: Cross Bracing – Bottom Chord Section

6.4 End Diaphragm Detail

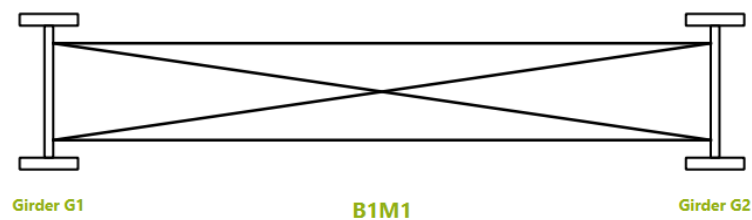


Figure 6.11: End Diaphragm Layout




Figure 6.12: End Diaphragm – Bracing Section




Figure 6.13: End Diaphragm – Top Chord Section




Figure 6.14: End Diaphragm – Bottom Chord Section

7 Material Take-off & Quantity Summary

Table 7.1 Bill of Materials (Steel, Concrete, and Reinforcement Quantities)

S.N.	Item Description	Volume	Quantity	Total Volume	Weight (MT)	Total Weight (MT)
1	Structural Steel (IS 2062) for Girders	$0.06104 \text{ m}^2 \times 40.00 \text{ m} = 2.44173 \text{ m}^3$	10	24.42	19.17	191.68
2(a)	Cross Bracing - Top Chord	$0.00024 \text{ m}^2 \times 2.46 \text{ m} = 0.00058 \text{ m}^3$	108	0.06	0.0046	0.50
2(b)	Cross Bracing - Bottom Chord	$0.00024 \text{ m}^2 \times 2.46 \text{ m} = 0.00058 \text{ m}^3$	108	0.06	0.0046	0.50
2(c)	Cross Bracing - Diagonal Chord	$0.00024 \text{ m}^2 \times 3.11 \text{ m} = 0.00074 \text{ m}^3$	216	0.16	0.0058	1.25
3	Concrete (M40) for Deck Slab	$24.65 \text{ m} \times 0.25 \text{ m} \times 40.00 \text{ m} = 246.50 \text{ m}^3$	1	246.50	616.25	616.25
4	Reinforcement Steel (Fe 500)	$0.094204 \text{ m}^2 \times 40.00 \text{ m} = 3.76815 \text{ m}^3$	1	3.77	29.58	29.58
5	Shear Stud Connectors	$0.000314 \text{ m}^2 \times 0.100 \text{ m} = 0.000031 \text{ m}^3$	2020	0.06	0.000247	0.498
6	Crash Barrier	$0.00000 \text{ m}^2 \times 40.00 \text{ m} = 0.00001 \text{ m}^3$	2	0.00	0.00	0.00

8 Standards & Assumptions

This section provides references to standards used to calibrate the OsdagBridge design modules, and notes the limitations of the current software version.

8.1 Design Standards

The following Indian Road Congress (IRC) codes and Indian Standards (IS) form the basis of all design calculations in this software.

Table 8.1: IRC Codes

Code	Year	Title / Scope
IRC 5	2015	General Features of Design - carriageway widths, kerb, footpath dimensions
IRC 6	2017	Loads and Load Combinations - dead load, live load, impact, wind, temperature, etc.
IRC 22	2015	Composite Construction (LS) - Composite section properties, ULS/SLS design, shear connectors
IRC 24	2010	Steel Road Bridges (LS) - Stiffener design, skew angle limits, diaphragm requirements
IRC 112	2020	Concrete Road Bridges - Deck slab flexure, shear, crack width, reinforcement
IRC SP 114	2018	Seismic Design of Road Bridges

Table 8.2: IS Codes

Code	Year	Scope
IS 800	2007	Steel construction - tension, compression, bending, shear, LTB, stiffeners, combined checks
IS 456	2000	Concrete - simplified stress-block for deck moment capacity
IS 1786	2008	Reinforcement steel properties
IS 1893 (Part 3)	2014	Earthquake resistant design
IS 2062	2011	Structural steel - yield and ultimate strength by grade

8.2 Analysis and Design Assumptions of This Version

Structural Analysis

- All girders are modelled as simply supported; continuous spans are not currently supported.
- A 3D grillage model (OSPGrillage) is used for load distribution. Grillage members carry composite section properties after the construction stage.
- The transverse member forces are computed using an approximate 2D frame analogy. For irregular or skewed geometries, a 3D FEM is recommended.
- Fixed bearing stiffness is modelled as $k = 1,000,000 \text{ kN/m}$ (virtually rigid); free/expansion bearing as $k = 100 \text{ kN/m}$.
- Construction stage sequence analysis is approximate. Detailed staged analysis should be performed for long-term deflection checks.

Composite Action

- Full shear connection is assumed at ULS with headed stud connectors designed per IRC 22:2015 Cl.606.
- Short-term composite section properties (modular ratio $n = E_s/E_{cm}$) are used for ULS checks.
- Long-term composite section properties (with creep-adjusted modular ratio) are used for SLS deflection and crack-width checks.
- Pre-composite stage: the steel girder alone resists all construction loads prior to concrete gaining strength.

8.3 Known Limitations of This Version

- Substructure (piers, pile caps, foundations) and bearing design are not included.
- Splice connection design is not implemented.
- Skew angle > 15 degrees requires independent manual analysis (IRC 24 Cl. 504.8).
- Construction stage sequence analysis is approximate; detailed staged analysis should be performed for long-term deflection checks.
- The grillage analysis assumes simply supported boundary conditions; continuous spans are not currently supported.

References

1. IRC 5 (2024) — *Standard Specifications and Code of Practice for Road Bridges, Section I: General Features of Design.*
2. IRC 6 (2017) — *Standard Specifications and Code of Practice for Road Bridges, Section II: Loads and Load Combinations.*
3. IRC 22 (2014) — *Standard Specifications and Code of Practice for Road Bridges, Section VI: Composite Construction (Limit State Design).*
4. IRC 24 (2010) — *Standard Specifications and Code of Practice for Road Bridges, Section V: Steel Road Bridges (Limit State Method).*
5. IRC 112 (2011) — *Code of Practice for Concrete Road Bridges.*
6. IRC SP 114 (2018) — *Guidelines for Seismic Design of Road Bridges.*
7. IS 800 (2007) — *Indian Standard: General Construction in Steel — Code of Practice.*
8. IS 2062 (2011) — *Hot Rolled Medium and High Tensile Structural Steel — Specification.*
9. Subramanian, N. (2008). *Design of Steel Structures.* Oxford University Press.
10. Steel-INS DAG Teaching Resource Materials. <https://www.steel-insdag.org>