



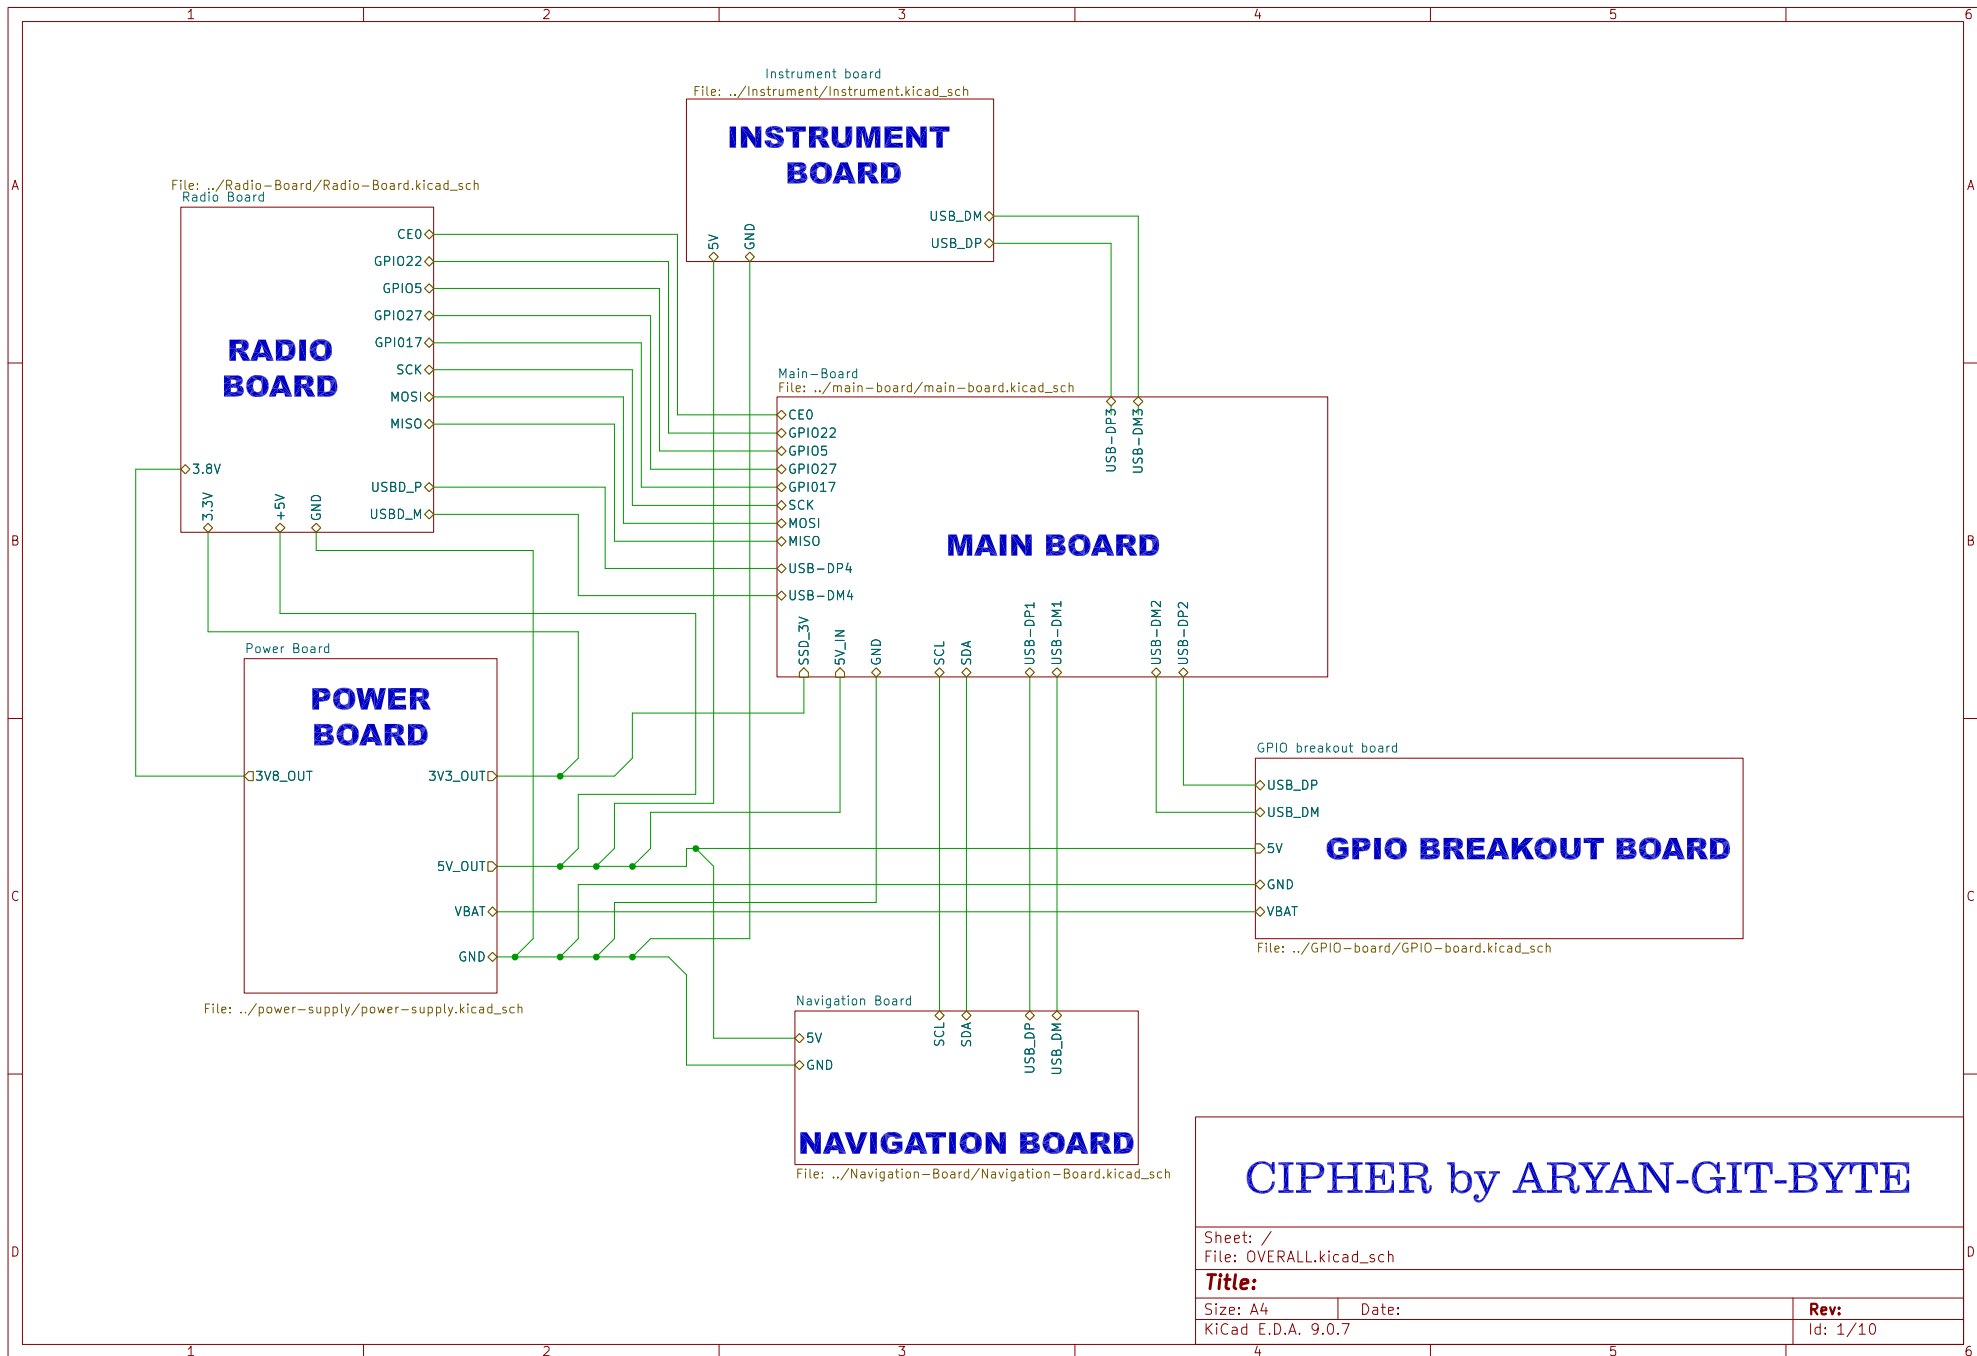


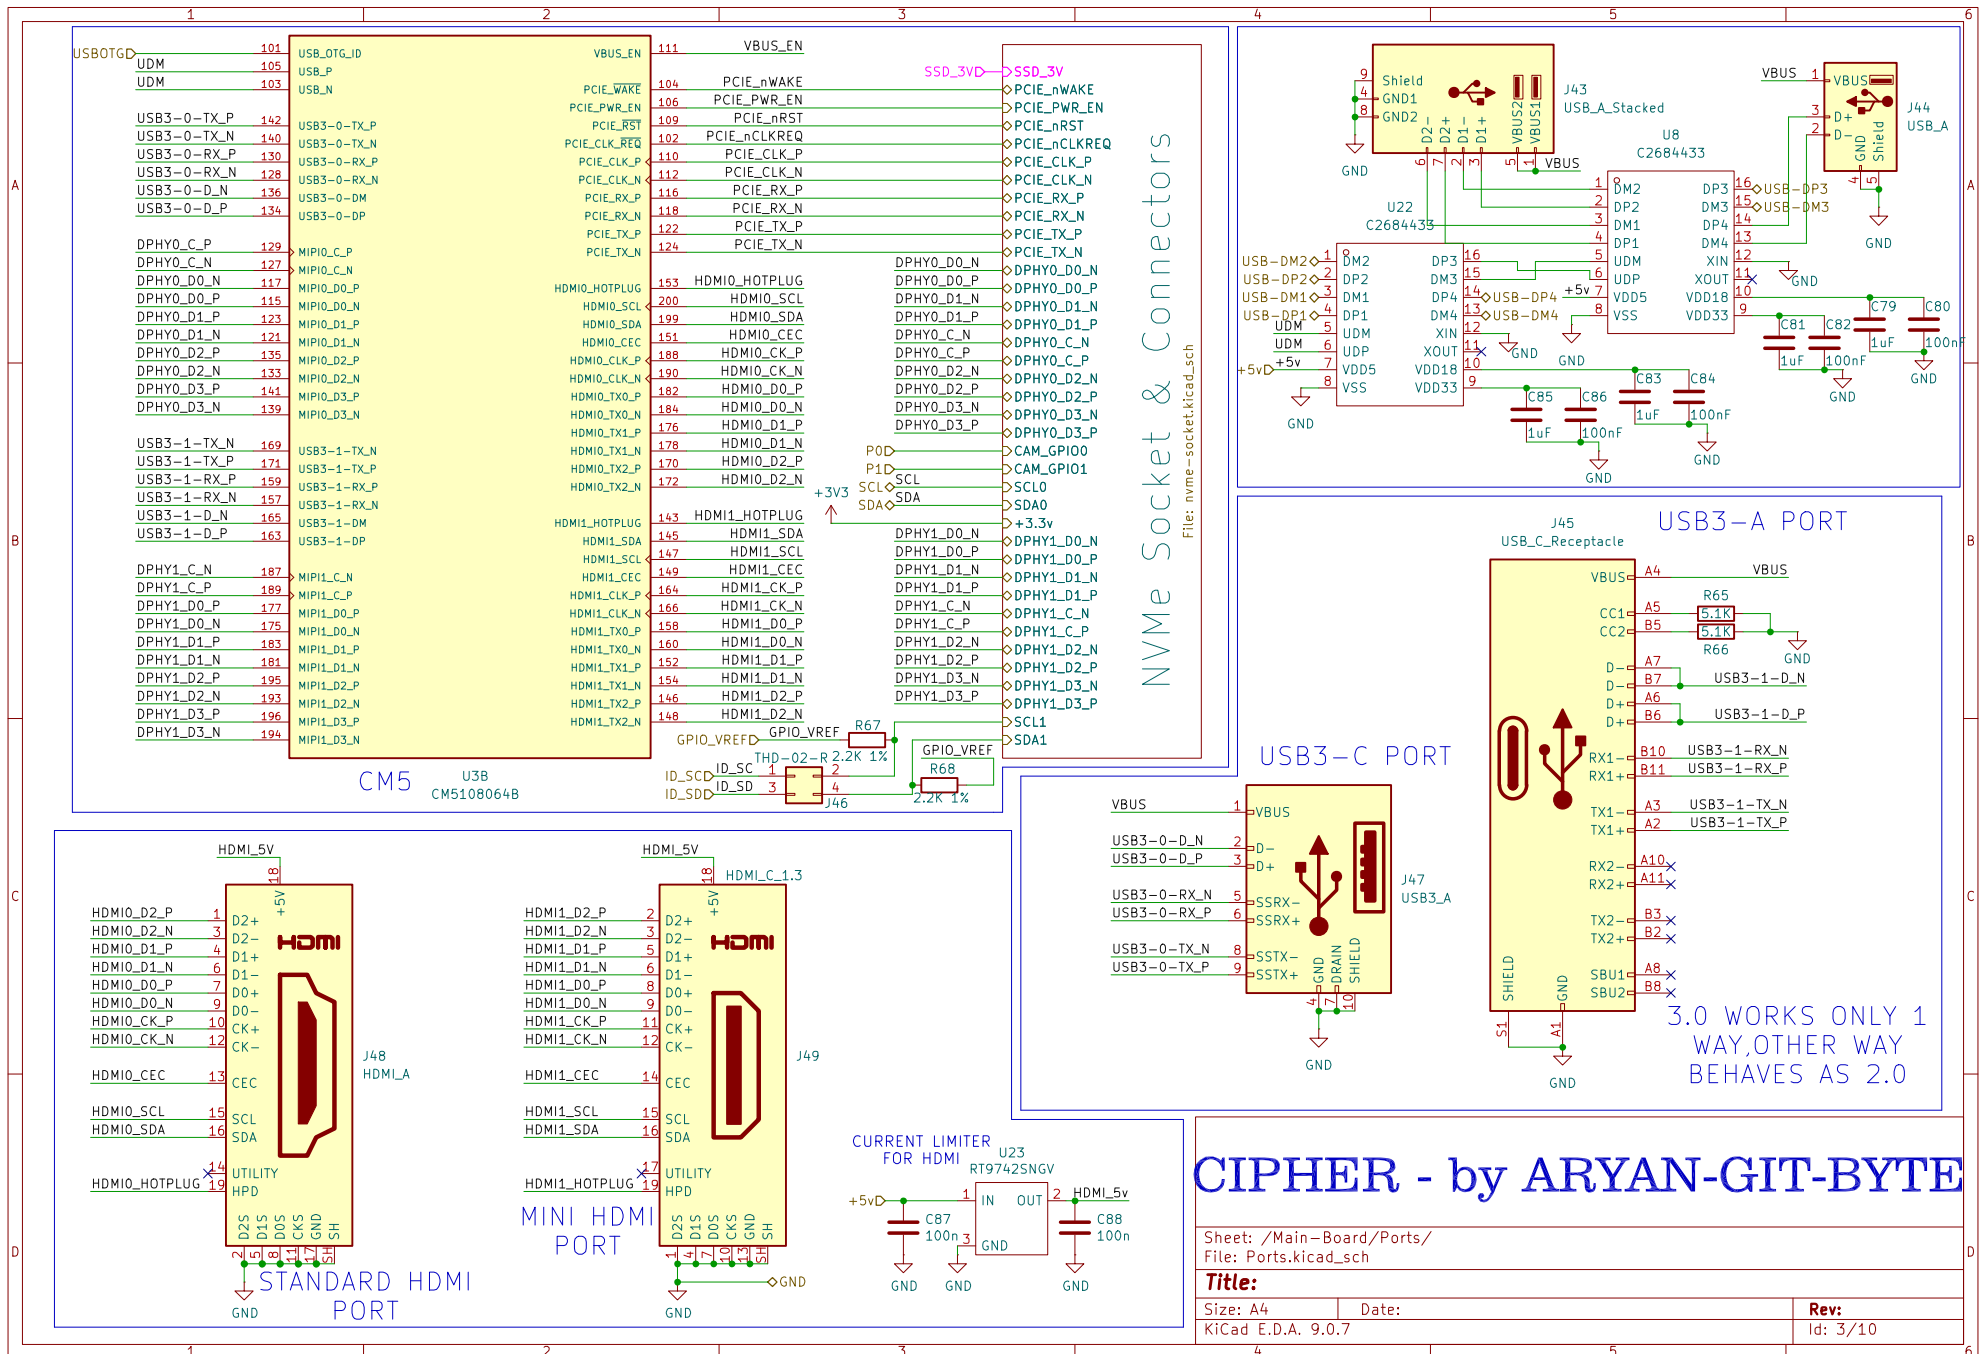


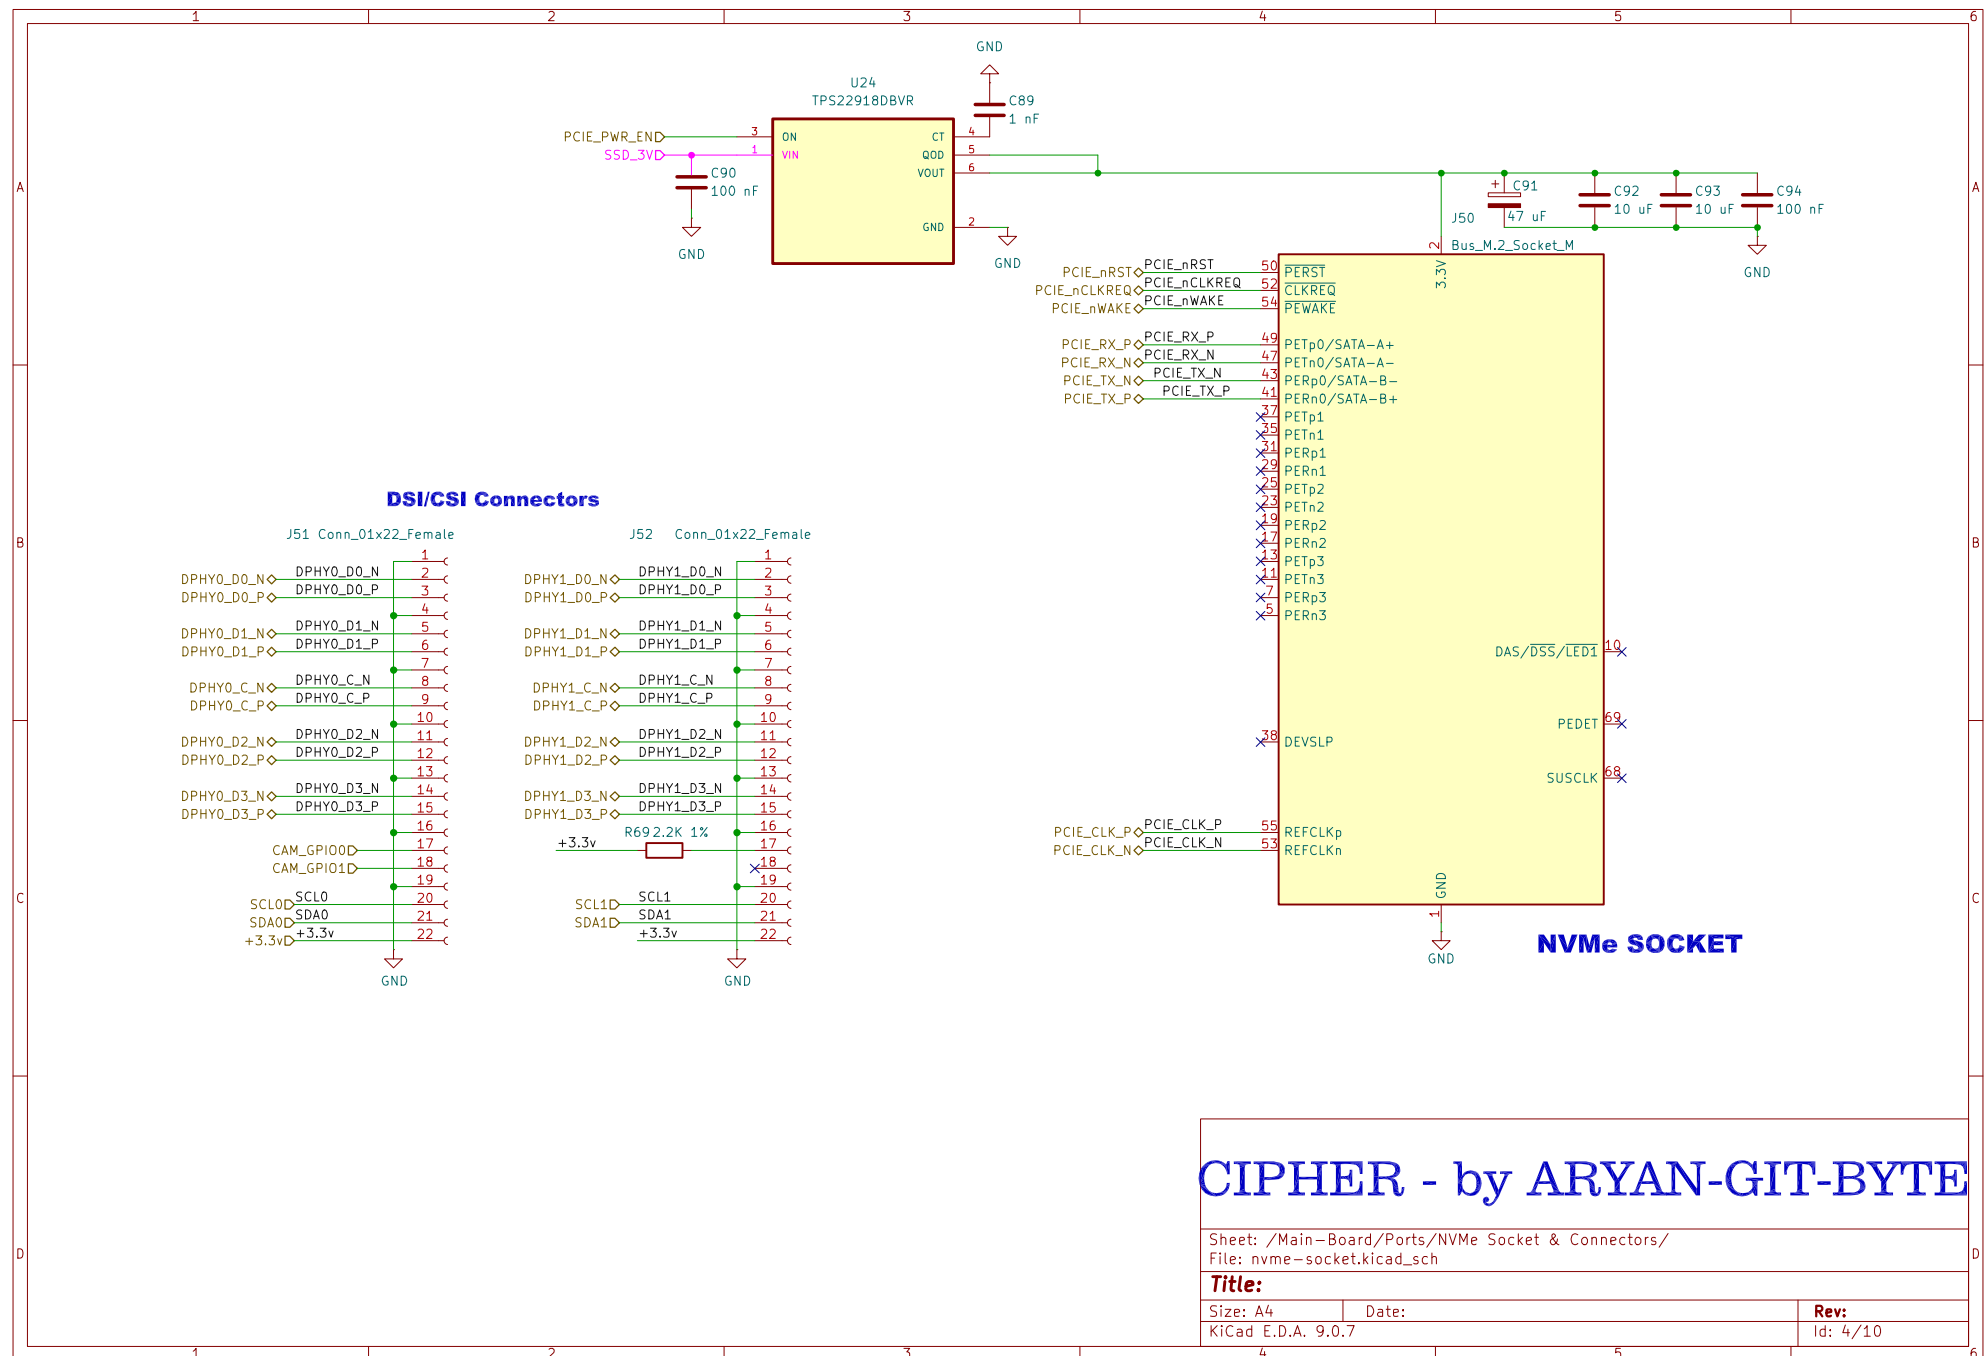

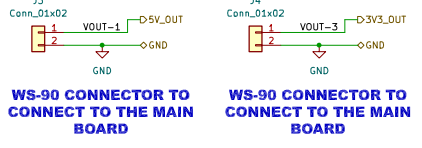


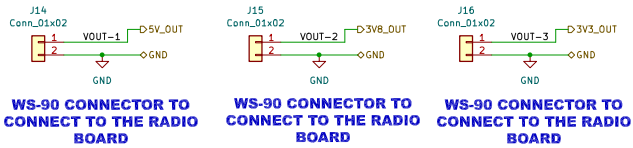


WS-90 CONNECTORS


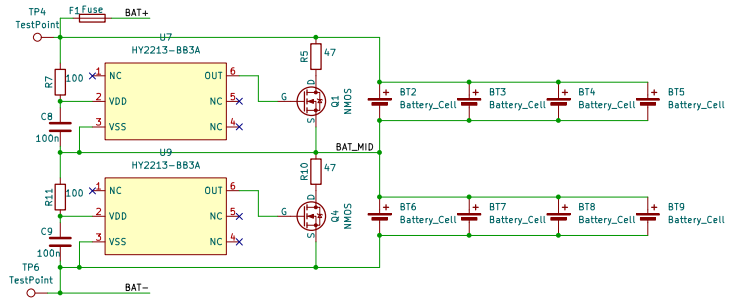


BATTERY PROTECTION CIRCUIT


NMOS = HUASHUO HSBA4094

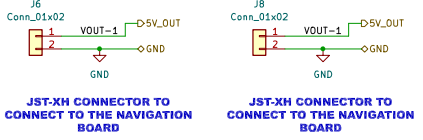


JST-XH CONNECTORS

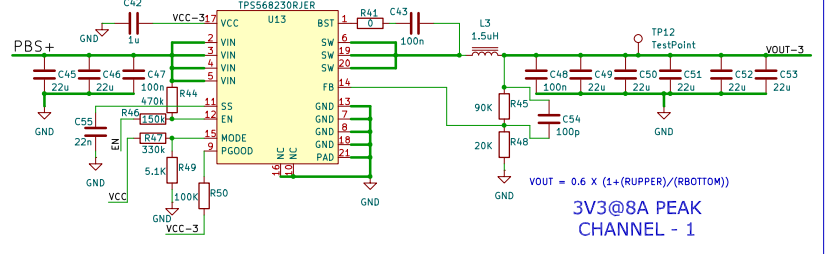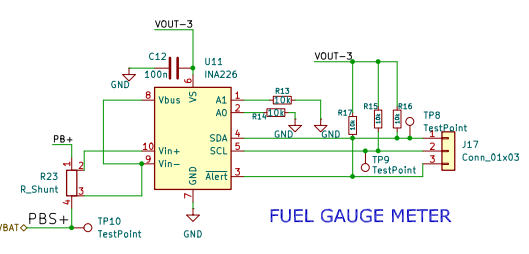

3V3@8A PEAK CHANNEL - 1

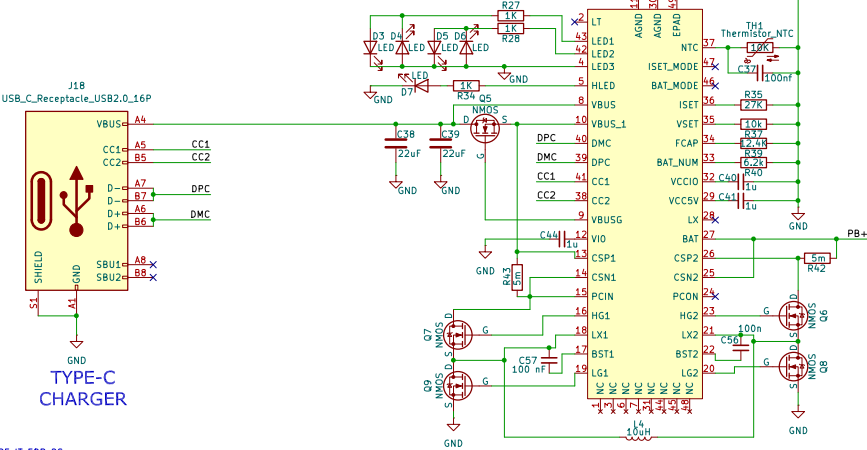


R42 - 6.2K, CONFIGURE IT FOR 2S
R32 - 10K, SETS MAX CHARGE VOLTAGE AS 4.2V FOR 1 CELL, 8.4V TOTAL
R44 - 27K, SETS THE PD INPUT POWER LIMIT TO 100W
R43 - 12.4K, TELLS THAT THE TOTAL CURRENT OF 4P CELLS ARE 10,000 mA

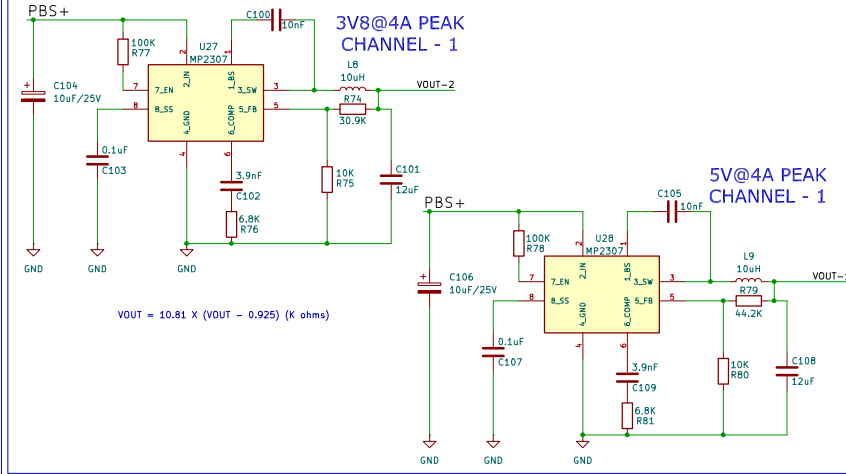


5V@4A PEAK CHANNEL - 1


CIPHER - by ARYAN-GIT-BYTE

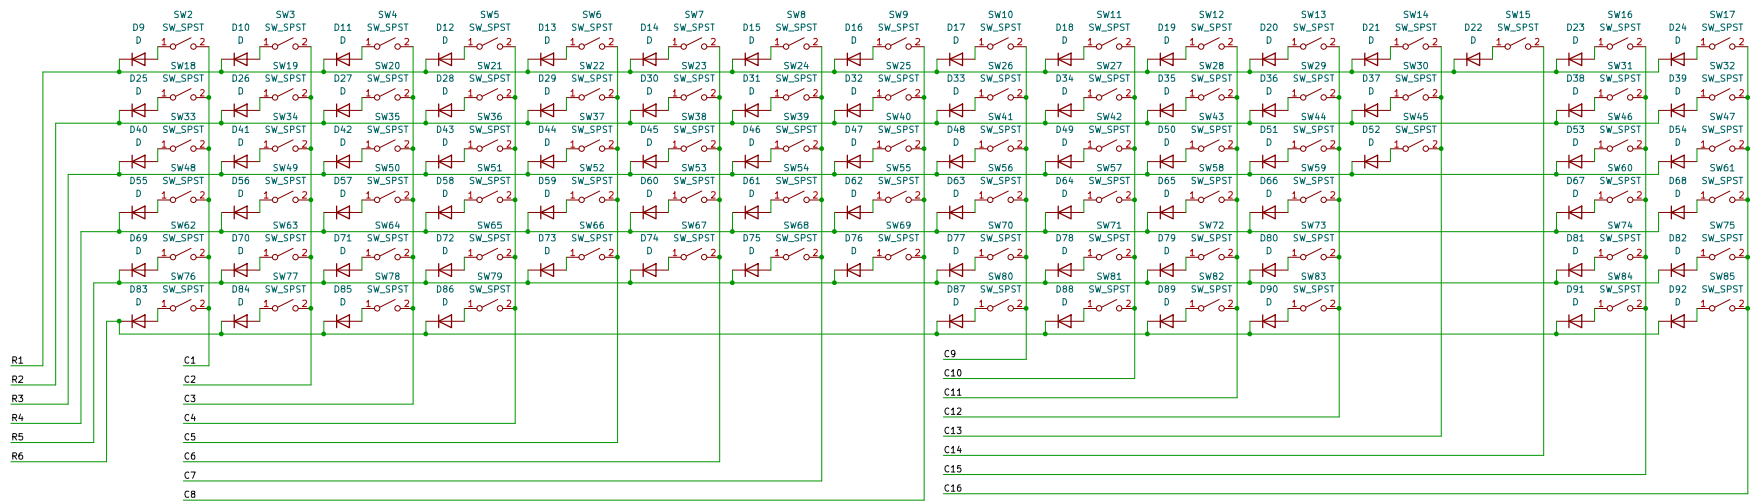


KEYBOARD MATRIX 84 KEYS

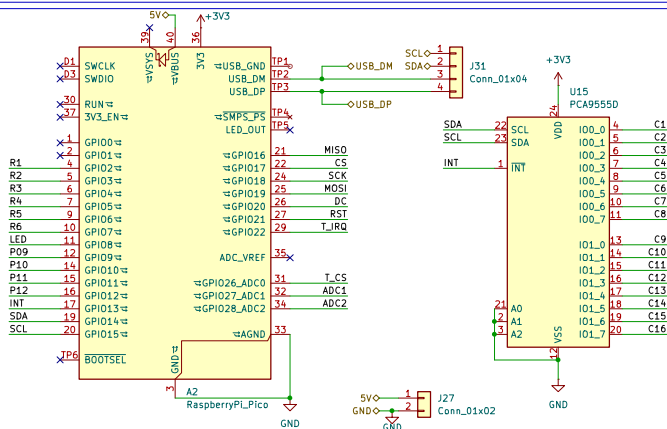

MCU & GPIO EXPANDER

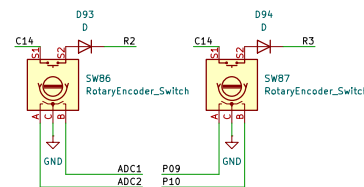


ROTARIES

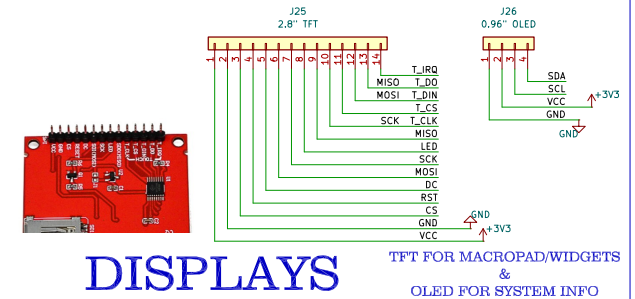

DISPLAYS

TFT FOR MACROPAD/WIDGETS
&
OLED FOR SYSTEM INFO

Pin	Signal	Description
1	RST	Reset
2	INT	Interrupt
3	VDD	Power Voltage
4	SDA	I ² C Serial Data Input And Output
5	SCL	I ² C Serial Clock Input
6	GND	Ground



TOUCH PANEL FOR TRACKPAD

CIPHER by ARYAN-GIT-BYTE





Sheet: /Navigation Board/
File: Navigation-Board.kicad_sch

Title:

Size: A3 Date:

KiCad E.D.A. 9.0.7

Rev:
Id: 6/10

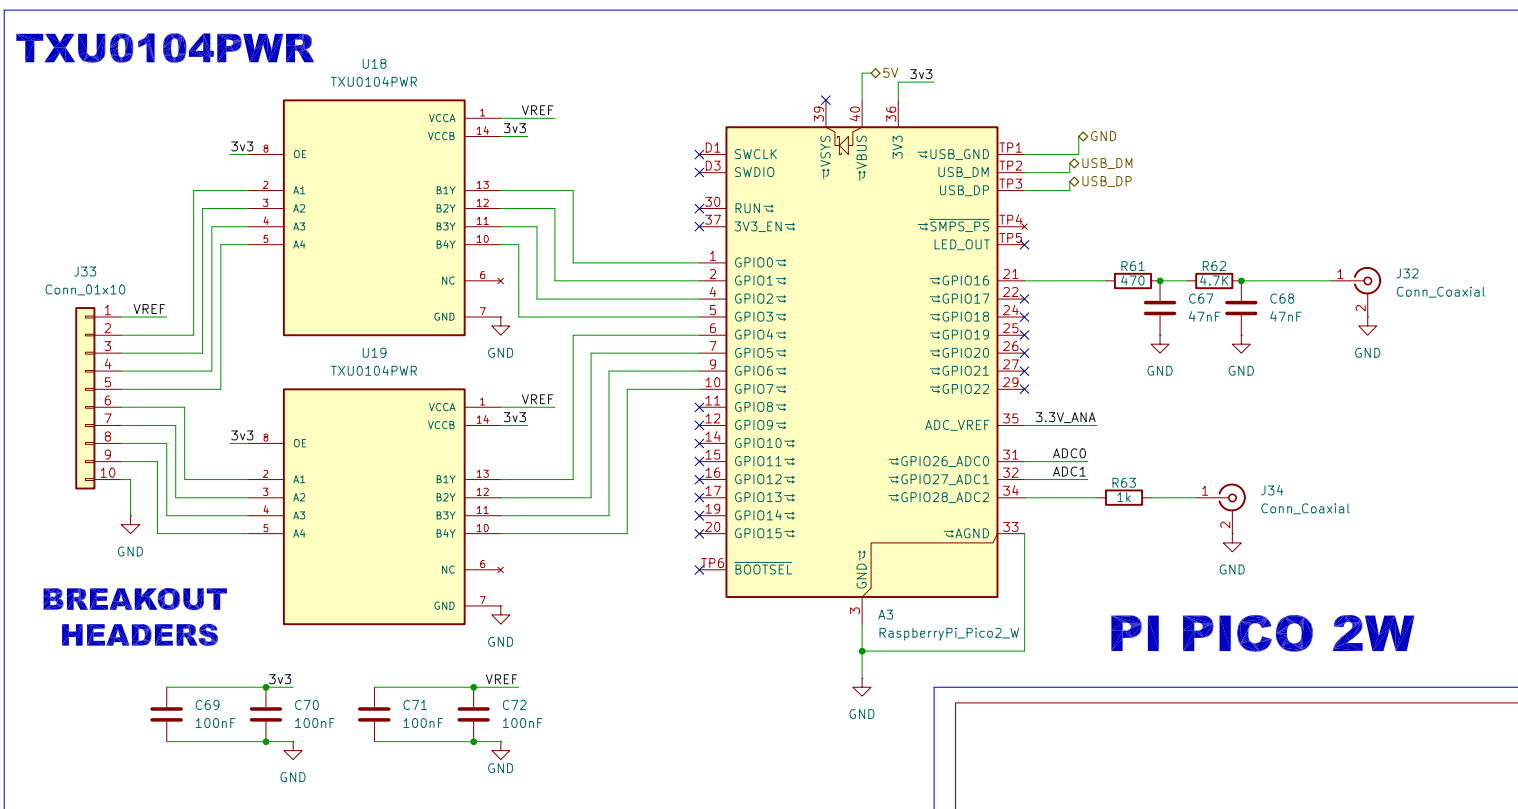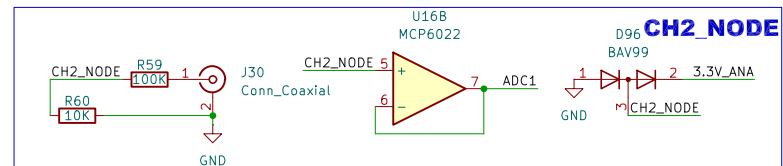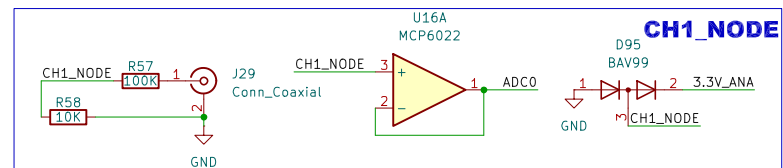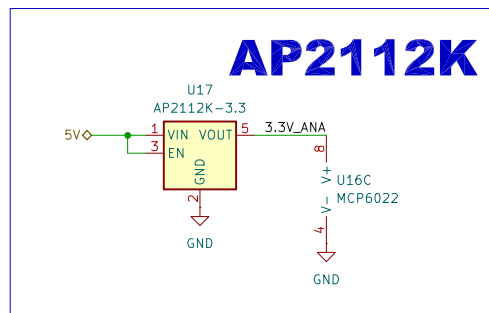






Sheet: /Instrument board/
File: Instrument.kicad_sch

Title:

Size: A4 Date:
KiCad E.D.A. 9.0.7

Rev:
Id: 7/10

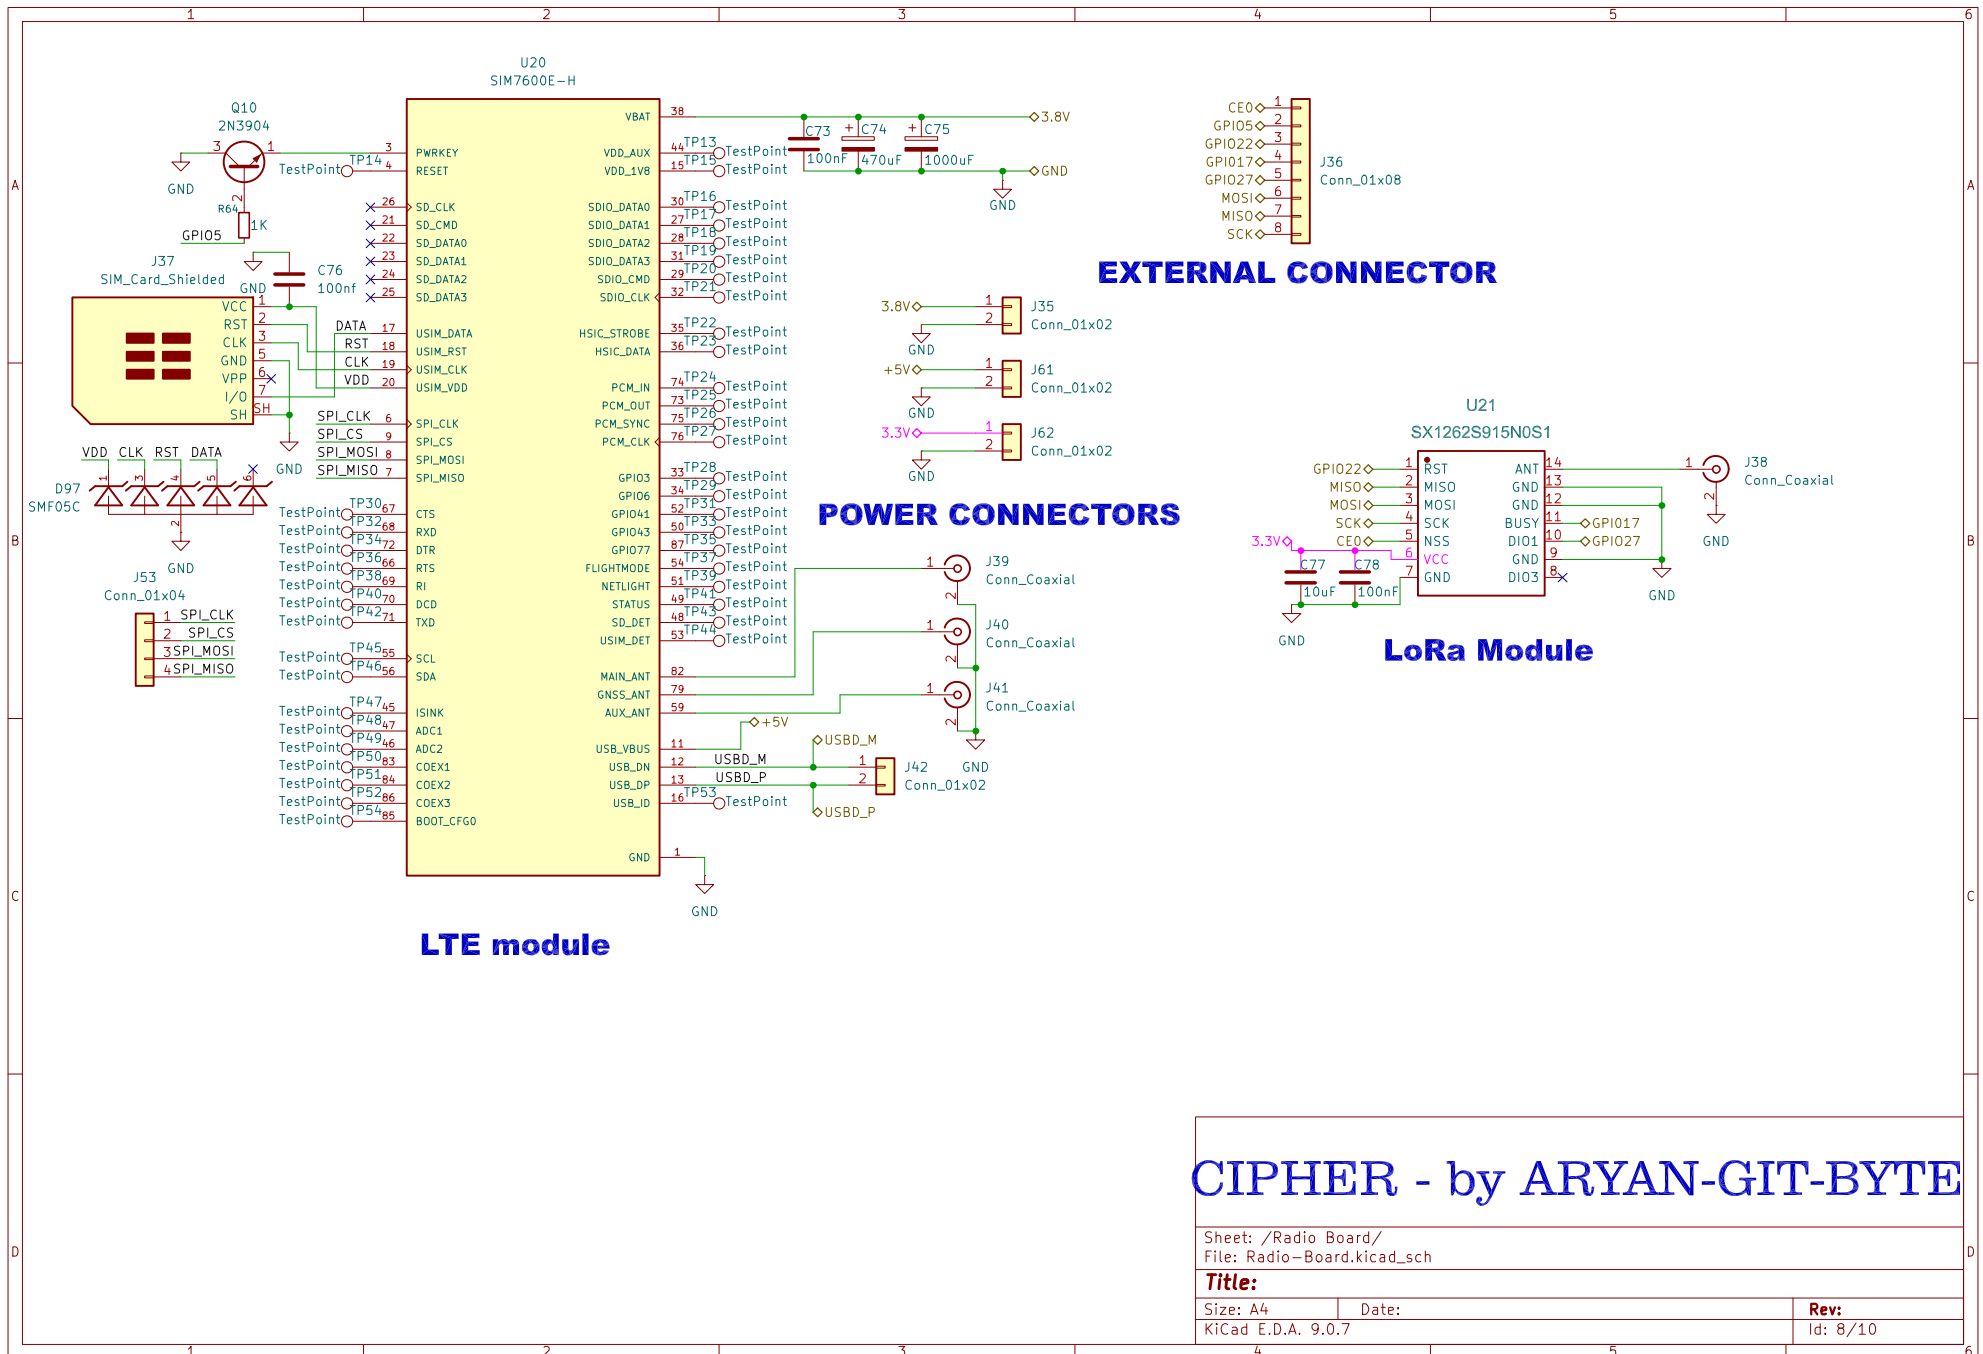

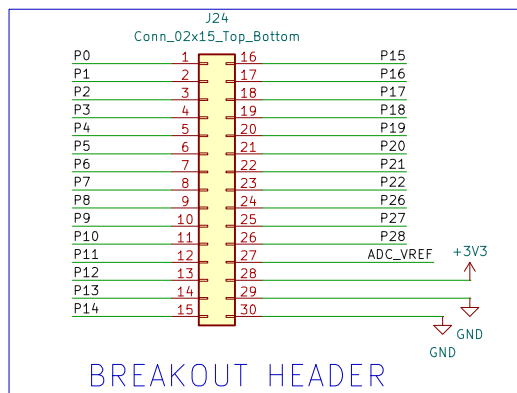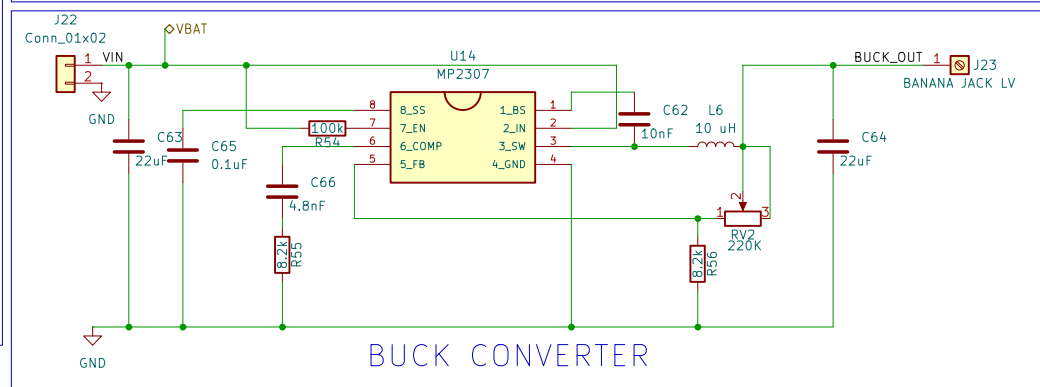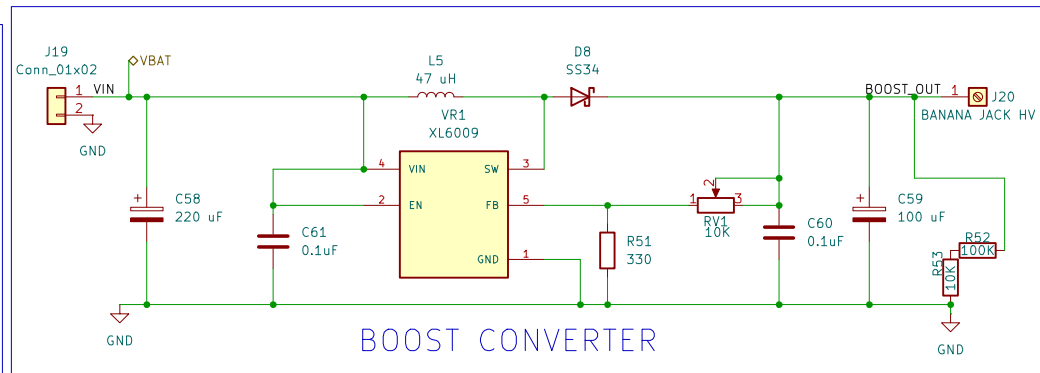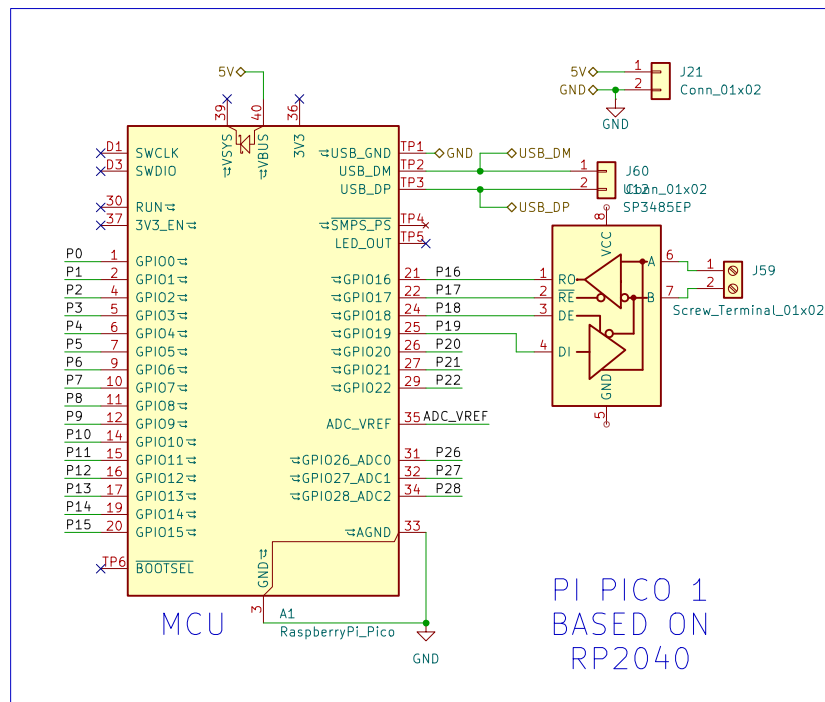

CIPHER - by ARYAN-GIT-BYTE

Sheet: /GPIO breakout board/
File: GPIO-board.kicad_sch


Title:

Size: A4
KiCad E.D.A. 9.0.7



Date:

Rev:


Id: 9/10

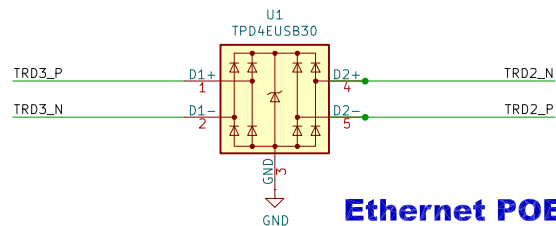



Ethernet POE Protection

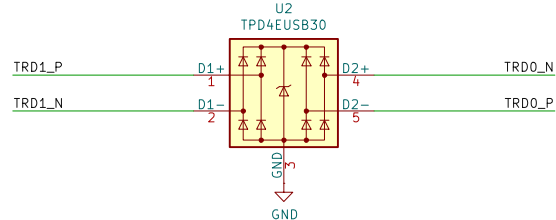

POE Header



POWER LOAD SWITCH FOR SD CARD

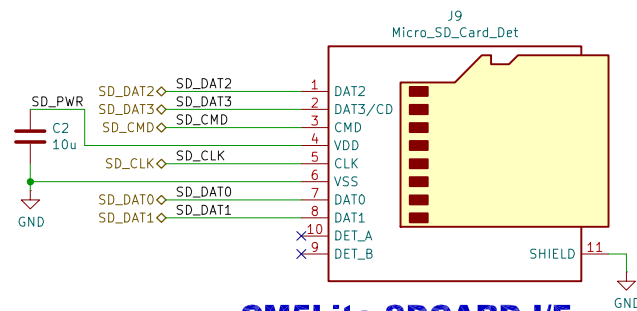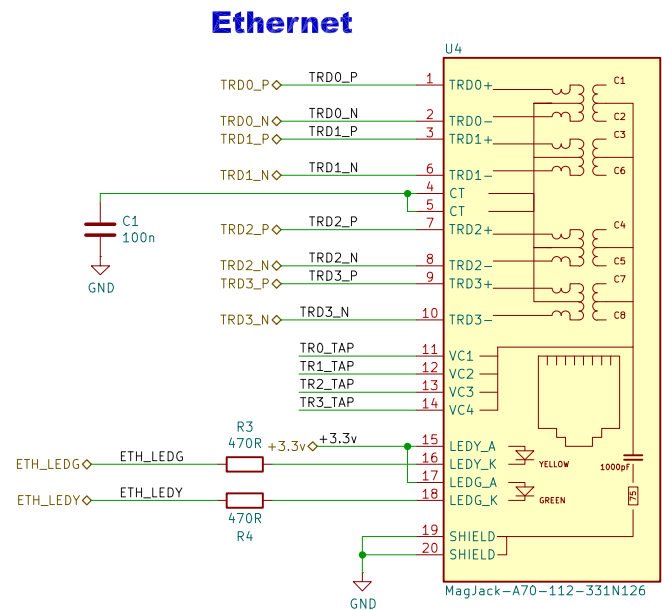

CM5Lite SDCARD I/F

Sheet: /Main-Board/Connectors/
File: connectors.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.7

Date:

Rev:
Id: 10/10