

International Islamic University Chittagong
Centre for General Education
Semester End Examination, Spring -2025
Course Code: GEEM-1101
Course Title: Text of Ethics and Morality
(Faculty of science)

Marks: 50

Duration: 2.30 hours

Answer the following questions

loss

SL	Questions	Marks	CLOs	Blooms taxonomy domain
01	Answer the following questions: a. Who was Luqmaan? Write short note about his life. b. Write the lessons of Surah Al-Asr. c. Are the face, hand and leg included in the part of veil? Write the views of Islamic scholars.	3+3+4	CLO-2 CLO-3	Remember & Understand
02	Answer the following questions: a. Define Talaq and discuss the procedures of divorces. b. Elucidate the rights of pregnant woman in her waiting period.	5+5	CLO-3	Remember & Understand
03	"Allah (Swt) is the truth" Prove this statement by the verses of modern science. Or Explain the harms of drug, divinatory arrows and gambling in the community.	10	CLO-2	Create & Analyze
04	Explain the values of youth referring with Quranic verses. Or Who are ideal servants of Allah (Swt)? Mention their characters referring from Surah Al-Forqaan.	10	CLO-3	Create & Understand
05	"Allah has permitted trade and has forbidden interest" Analysis this Quranic statement.	10	CLO-3	Analyze

International Islamic University Chittagong (IIUC)
Department of Computer Science and Engineering (CSE)
Semester Final Examination

Program: B. Sc. in CSE
Course Code: MATH-1107
Time: 2:30 hours



Semester: Spring-2025
Course Title: Mathematics-I
Total Marks: 50

- (i) Answer all the questions. The figures in the right-hand margin indicate full marks.
(ii) Please answer the several parts of a question sequentially.
(iii) Separate answer script must be used for separate groups.
(iv) Course Learning Outcomes (CLOs) and Bloom's Levels are mentioned in additional Columns.

Course Learning Outcomes (CLOs) of the Questions


CLO1:	Compute the functions, limit and continuity of a function, derivatives, integrals and extrema of single-variable and/or multivariable functions.
CLO2:	Understand the techniques of differentiation and integration.
CLO3:	Demonstrate the applications of differentiation and integration.

Bloom's Taxonomy Domain Levels of the Questions

Letter Symbols	R	U	Ap	An	E	C
Meaning	Remember	Understand	Apply	Analyze	Evaluate	Create

Group – A

1. a) Define partial derivatives.
The volume of the cylinder is given by
 $V = \pi r^2 h$ (see the figure).
Find $\frac{d}{dr} V$, $\frac{d}{dh} V$, $\frac{\delta}{\delta r} V$, $\frac{\delta}{\delta h} V$



Marks CLO DL

5 CLO1 U

- Or) State Euler's theorem. If $u = \sin^{-1} \frac{x+y}{\sqrt{x}+\sqrt{y}}$ then using the theorem on homogeneous function show that, $x \frac{\partial u}{\partial x} + y \frac{\partial u}{\partial y} = \frac{\tan u}{2}$

- b) Find the maximum and minimum values of the function
 $y = x^3 - 3x + 2$

5 CLO1 U

2. a) Evaluate the integral, $\int \frac{dx}{(2x+1)\sqrt{4x+3}}$

5 CLO2 U

- b) Evaluate the integral $\int \frac{4 \cos x + 3 \sin x}{5 \cos x + 4 \sin x} dx$

5 CLO2 U

- Or) Evaluate the integral $\int \frac{x e^x}{(x+1)^2} dx$

Group - B

3. a) Evaluate the Integral, $\int_0^1 x^3 dx$ by geometrically.

5 CLO2 U

- b) Prove that $I_n = \int_0^{\pi/2} \sin^n x dx = \frac{n-1}{n} I_{n-2}$

5 CLO2 U

Or) Using the properties of definite integral show that,

$$\int_0^{\pi/2} \frac{(\sin x)^{3/2}}{(\sin x)^{3/2} + (\cos x)^{3/2}} dx = \frac{\pi}{4}$$

4. a) Evaluate the triple integral, $\int_0^1 \int_0^{1-x} \int_0^{1-y^2} z dz dy dx$

5 CLO2 U

- b) Using Gamma and Beta function Show that $\int_0^{\pi/2} \cos^8 x \sin^6 x dx = \frac{5\pi}{4096}$

5 CLO2 U

Or) Using Gamma and Beta function Prove that $\Gamma \frac{1}{2} = \sqrt{\pi}$

5. a) Find the circumference of the circle, $x^2 + y^2 = 16$ about the y-axis.

4 CLO3 Ap

- b) Find the area of the surface generated by revolving the arc of the curve of $x = y^2$ from $x = -1$ to $x = 2$ about the x-axis.

3 CLO3 Ap

- c) Find the volume of the solid of revolution generated by rotating the curve $y = x^3$ between $y = 0$ to $y = 4$ about the y-axis.

3 CLO3 Ap

$$\frac{d}{dn}(\sqrt{n}) = \frac{1}{2\sqrt{n}}$$

$$\frac{d}{dx} \sqrt{x} = \frac{1}{2\sqrt{x}}$$

$$\frac{d}{dx} \sqrt{x} = \frac{1}{2\sqrt{x}}$$

Bismillahir Rahmanir Rahim
 International Islamic University Chittagong
Department of Computer Science & Engineering
 B. Sc. in CSE Semester Final Examination, Spring-2025
Course Code: PHY-1101 Course Title: Physics-I
 Total marks: 50 Time: 2 hours 30 minutes

[Answer *all* the questions. Figures in the right hand margin indicate full marks.
 Separate answer script must be used for Group A and Group B]

Group-A

1. a) Distinguish between the stationary and progressive wave? CO1 R 2
- b) Derive the expression "the apparent frequency of the note when the source moves towards and away from a stationary observer". CO2 U 5

Or

Investigate theoretically the formation of a stationary wave and hence show that the distance between a node and an adjacent antinode in a stationary wave is $\lambda/4$.

- c) A person is standing on a platform. An engine while approaching the platform blows a whistle of pitch 660 hertz. The speed of the engine is 72 km/hr, velocity of sound 350 m/s. Calculate the apparent pitch of the whistle as heard by the person. CO3 A 3
2. a) Draw the graphical representation of a simple harmonic motion. CO1 R 2
 - b) Show that for a particle executing simple harmonic motion, the average kinetic energy over a period of oscillation is proportional to the square of the amplitude. CO2 U 5
 - c) The displacement of an oscillating particle at an instant t is given by $x = A \cos \omega t + B \sin \omega t$. Show that it is executing a simple harmonic motion. If $A=5$ cm, $B=12$ cm, and $\omega=4$ rad/s, calculate the amplitude and the maximum velocity of the particle. CO3 A 3

Or

The equation of a particle executing simple harmonic motion is, $y = 10 \sin(\omega t + \delta)$. If time period is 30 sec, find out the angular frequency.

Group-B

3. a) State the second law of thermodynamics. CO1 R 2
- b) Explain the Carnot's cycle in different state in ideal heat engine? CO2 U 5

Or

Explain the Young's double slit experiment and determine the condition of the bright and dark fringe.

- c) An inventor claims to have developed an engine working between 600 K and 300 K capable of having an efficiency of 52%. Comment on his claim. CO3 A 3
4. a) What are the conditions necessary for observing interference fringes? CO1 R 2
 - b) Discuss the interference of light analytically and obtain the conditions of maximum and minimum intensities. CO2 U 5

or

Develop an expression for the efficiency of a Carnot heat engine operating between two heat reservoirs at different temperatures.

- c) Show that phase difference $= \frac{2\pi}{\lambda} \times \text{path difference}$. CO3 A 3
5. a) State the famous *Malus'* law related to the polarization of light. CO1 R 2
 - b) Show that when light is incident on a transparent material at the *Brewster* angle, the reflected and refracted rays are at right angles. CO2 U 5
 - c) The critical angle for a certain wavelength of light in the case of a piece of glass is 40° . Find the polarizing angle for glass. CO3 A 3

Bismillahir Rahmanir Rahim
International Islamic University Chittagong
 Department of Computer Science & Engineering
 B. Sc. in CSE Semester Final Examination, Spring-2025
 Course Code: CSE-1121 Course Title: Computer Programming 1
 Total marks: 50 Time: 2 hours 30 minutes

[Answer all the questions; in some questions, there are options; you will solve any one of them; Figures in the right-hand margin indicate full marks. Separate answer script must be used for Group-A and Group-B]

Group-A

1. a) What is the output of the following C code snippet? Explain.

```
int i, x=12;
for(i=1; i<5; ++i){
    if(i%2==1)
        x-=i;
    else
        x++;
    printf("%d ", x);
    continue;
}
printf("\nx=%d", x);
```

$x = x - i$
 $2 \mid 12 \rightarrow 0$
 $21 \ 12 \ 11 \ 10$

2 CO2 U

What will be the output if `continue` is replaced by `break`? Explain.

- b) The following code is supposed to check whether an input number is a palindrome or not. However, it produces incorrect results for some inputs. What will be the output of the current version for a positive integer input? Correct the logic

```
#include <stdio.h>
int main() {
    int num, original, reversed = 0;
    scanf("%d", &num);
    while (num > 0) {
        int digit = num % 10;
        reversed = reversed * 10 + digit;
    }
    if (reversed == original)
        printf("Palindrome\n");
    else
        printf("Not Palindrome\n");
    return 0;
}
```

$235 \rightarrow 532$
 $0 \times 10 + 5$
 $5 \times 10 + 3$
 $53 \times 10 + 2$
 $0 \ 532$
 221

- c) Write a C program that reads a positive integer N and then prints a pyramid of asterisks in N rows. For example, if N is 4, then the output would be

Sample Input	Sample Output
4	<pre> * ** *** ****</pre>

[OR]
 Write a C program to print a triangle with N rows. Each even-indexed row (starting from 0) should contain increasing even numbers (starting from 2), and each odd-indexed row should contain increasing odd numbers (starting from 1). The i -th row should have $i + 1$ numbers.

Sample Input	Sample Output
5	2 1 3 2 4 6 1 3 5 7 2 4 6 8 10

2. (a) Is it possible to return *multiple* values from a C function? If yes, write a C code segment demonstrating how to return multiple values. 2 CO2 U
 (b) Write down the **output** of the following C program. Here, ID refers to the last digit of your student ID. For example, if your ID is C251009, then ID = 9. 2 CO2 U

```

i)
#include <stdio.h>
int g = 0;
void track()
{
    static int s = ID;
    g += s;
    s--;
    printf("s = %d, g = %d\n", s, g);
}

int main() {
    int i;
    for (i = 0; i < 3; i++) {
        track();
    }
    return 0;
}

ii)
#include<stdio.h>
int n = 5;
int function(int n);
int main(){
    int n = ID;
    printf("%d", function(n));
}

int function(int n){
    if(n==10)
        return 0;
    else
        return n + function(n+1);
}
    
```

Handwritten notes and calculations:
 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20
 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30
 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40
 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50
 s = 0, g = 0, s = 0, g = 0, s = 0, g = 0

- c) Write a recursive function in C that calculates the **sum of the digits** of a given positive integer. 4 CO2 A
 The function must take an integer as input and return the sum using recursion. Demonstrate your function in a complete program.
 Function prototype: **long sumOfDigits(int n);**

[OR]

Write a C program using functions to **identify and display all prime numbers in a user-specified range**. You must implement a function **int isPrime(int n)** that returns 1 if n is prime, else 0. Implement a main program that accepts two integers as **lower and upper bounds** and prints all prime numbers in that range.

Sample Input	Sample Output
10 50	Prime numbers between 10 and 50: 11 13 17 19 23 29 31 37 41 43 47

Group-B

3. a) What is the output of the following C code snippet? Explain.

```
int a[] = {2, 4, 6, 8, 10};
int i;
for (i = 0; i < 5; i++) {
    a[i] = a[i] + i;
    printf("%d ", a[i]);
}
```

a[i] = 2, 4, 6, 8, 10

2 CO2 U

b) The following code is supposed to find a subarray of size 3 containing {1, 0, 0} from the given array. However, it does not behave as expected. Identify the reason and correct the errors in the code.

3 CO4 A

```
#include <stdio.h>
int main() {
    int arr[100] = {}, n, i;
    scanf("%d", &n);
    for(i = 0; i < n; i++)
        scanf("%d", arr[i]);
    for (i = 0; i <= n; i++)
        if (arr[i] == 1 && arr[i+1] == 0 && arr[i+2] == 1) {
            printf("Found at index %d\n", i);
        }
    else printf("Not Found");
    return 0;
}
```

2, 3

c) Write a C program that prompts the user to input the daily rainfall amounts for a period of 7 days. The program should store these values in an array and then calculate and display the total rainfall and the maximum rainfall recorded over the 7 days.

5 CO2 A

Sample Input	Sample Output
5 2.4 3 0 6.5 1 10.1	Total rainfall over 7 days: 28.00 mm Maximum rainfall in a single day: 10.1 mm

[OR]

Write a C program to check whether a given $N \times N$ 2D matrix is an identity matrix or not.

An identity matrix is a square matrix where:

- All elements on the main diagonal are 1
- All other elements are 0

Sample Input	Sample Output
3 1 0 0 0 1 0 0 0 1	Yes
4 1 0 0 2 0 1 0 0 0 0 1 0 0 0 0 3	No

4.

- a) Write output of the following C code snippet.

```
char s1[8]="IIUC", s2[8]="CSE", s3[8]="1121";
printf("%d\n", strlen(s1));
printf("%s\n", strcpy(s1, s2));
printf("%s\n", strcat(s2, s3));
printf("%d\n", atoi(s3)+1);
```

2 CO2 U

[OR]

Briefly explain the syntax and purpose of the following functions in C-

i) strlen () ii) strcat () iii) strcpy () iv) strcmp ()

- b) What is the difference between *pass by value* and *pass by reference* in C? Explain both concepts with suitable examples. 3 CO2 U
- c) Write a C program to check whether a given student ID is valid for a CSE student at IIUC. 5 CO2 A
The valid format for a CSE student ID is: **CYYSDDD**, Where c is a fixed character for CSE department, YY is the last two digits of the admission year (e.g., 25 for 2025), s is the semester code (1: Spring, 2: Summer, 3: Fall) and DDD is a three-digit roll number.

Sample Input	Sample Output
C251001	Valid CSE Student ID
M251001	Invalid ID Format

5.

- a) Define a *structure* named **Employee** that holds:

1. ID (integer)
2. Name (max 49 characters)
3. Basic salary (float)

3 CO3 A

Write a C program that receives employee information for N employees, Then display the information those of N employees.

- b) Write the output of the following C program.

```
i) #include <stdio.h>
#define SQUARE(x) ((x)*(x))
int main() {
    printf("%d\n", SQUARE(3));
    return 0; }

ii) #include <stdio.h>
int main() {
    int a = 5, b = 3;
    printf("%d, %d", a & b, a|b);
    return 0; }
```

2 CO3 U

- c) A text file named **studentDB.txt** contains records of students. Each line in the file has A student's **ID** (an integer) and Marks in **3 subjects** (as integers)

5 CO3 A

Write a C program that reads the file and calculates the **total marks** for each student.

Sample Input File	Sample Output
101 85 78 92	ID: 101, Total Marks: 255
102 76 88 81	ID: 102, Total Marks: 245
103 90 95 94	ID: 103, Total Marks: 279

[OR]

Write a program to open a file named **iiuc.txt** in write mode and write "Hello IIUC" into it. Then, close the file and open it again in read mode. Finally, read the contents of the file and print them on the screen.

International Islamic University Chittagong
Department of Computer Science and Engineering

Final Examination, Spring-2025

Course Code: EEE-1121

Time: 2 hour 30 minutes

Program: B.Sc. Engineering in CSE

Course Title: Basic Electrical Engineering

Full Marks: 50

[Answer all the questions from the following. Figures in the right margin indicate full marks]
Course Outcomes (COs) and Blooms Levels are mentioned in additional columns.

Part-A

- 1) a) Define the average value of a periodic signal. Find out the RMS and average value of the given signal shown in Fig-1a. CO-1 Ap 05

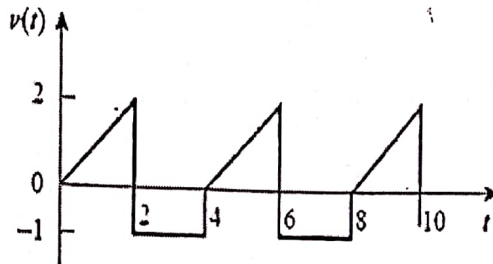


Fig-1a
OR

- 1) a) Consider a sine wave signal with an amplitude of 5 volts, varying from 0V to 10V over a cycle. Calculate the average and RMS values of this sine wave signal. CO-1 Ap 05
- 1) b) Two signals of Current and Voltage of a circuit is given below:
 $i = 4 \cos(\omega t + 10^\circ)$
 $v = 6 \sin(\omega t - 50^\circ)$
 Find the phasor relationship between these two signals. Additionally, create a neat waveform sketch for both signals to visually represent their behavior. CO-3 An 05

- 2) a) For the circuit shown in Fig. 2a, find the average power supplied by the source and the average power absorbed by the resistor. CO-3 An 05

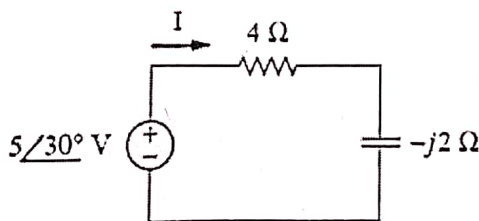


Fig. 2a

- 2) b) When connected to a 120-V(rms), 60-Hz power line, a load absorbs 4 kW at a lagging power factor of 0.8. Calculate the value of capacitance necessary to raise the pf to 0.95. CO-3 Ap 05

OR

- 2) b) A single-phase AC load is supplied with 230 V (rms) and draws a current of 10 A (rms) with a power factor of 0.8 lagging. Calculate:
 i) Real power (P) ii) Reactive power (Q) iii) Apparent power (S). CO-3 Ap 05

$V = IR$

$P = VI \cos \phi$

$i = I_m \cos(\omega t + 10^\circ)$

Part-B

- 3) a) Find $v(t)$ and $i(t)$ in the given circuit of Fig. 3a

CO-1 An 05

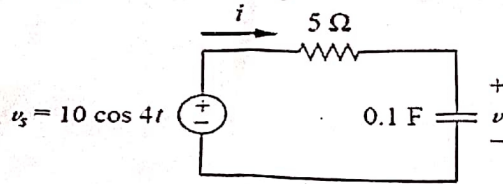


Fig. 3a

OR

- 3) a) Find the input impedance of the circuit in Fig-3a. Assume that the circuit operates at $\omega=50$ rad/s.

CO-3 Ap 05

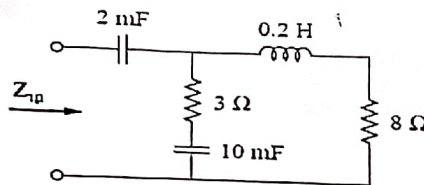


Fig-3a

CIVIL

$V = IN$

- 3) b) What is the voltage and current phasor relation in an inductive circuit? Explain your answer mathematically.

CO-3 An 05

- 4) a) Design a filter that allows only a certain range of frequencies, consisting of a R-L-C series connection. Draw its characteristic curve. If the value of $L=1$ mH, $C=0.1$ μ F, Calculate the value of f_s , Q_s and BW .

CO-3 Ap 05

- 4) b) Given $R=20$ k Ω and $C=1200$ pF:
i. Sketch the normalized plot if the filter is used as both a high-pass and a low-pass filter.

CO-3 An 05

ii. Determine the magnitude and phase of $A_v V_o/V_i$ at $f = 0.5f_c$ and $0.7f_c$ for the high-pass filter.

- 5) a) What are the advantages of three phase system? Given that $V_{bn} = 220\angle 15^\circ$, find V_{an} and V_{cn} assuming a negative phase sequence.

CO-3 An 05

- 5) b) A balanced Δ -connected load having an impedance $10 - 8j \Omega$ is connected to a Δ -connected positive-sequence generator having $V_{ab} = 330\angle 0^\circ$. Calculate the phase currents of the load.

CO-3 Ap 05

OR

- 5) b) A balanced abc-sequence Y-connected source with $V_{an} = 100\angle 10^\circ$ V is connected to a Δ -connected balanced load $(8+j4) \Omega$ per phase. Calculate the phase and line currents.

CO-3 Ap 05

$V = \frac{I}{\sqrt{3}}$

*

International Islamic University Chittagong
Center for General Education (CGED)

Semester End Examination - Spring 2025

Course Code: GEEL-1106

Course Title: Advanced English

Time: 2 hours & 30 minutes

Marks: 40+10 (Listening)

Reading part-25

Read the following passage and answer the questions

To many people, especially working people, co-operation means the *Co-operative Movement*. This movement was started by working people for the benefit of working people. It began in Rochdale, an industrial town in the North of England, in 1844. In that year a group of people who were employed in the factories of Rochdale decided that they would open a shop. This may not perhaps be considered a very original decision, or one that could be important for anybody except the people who took it. It was, however, of worldwide importance, though nobody could have guessed this at the time. The decision was, in fact, original in one very important detail, namely that it was taken by people who were to be the customers as well as the owners of the shop. A small sum of money was contributed by each member of the scheme. None of them was able to contribute much, but the total of their contributions was sufficient to pay for the premises of the shop and for the goods which were needed to stock it. The profit which was made by the sale of the goods to members was used to buy more goods, and any money left over after these goods had been bought was divided out amongst the members. In this way they were able to buy necessary goods at reasonable prices and also to share in the profit from their own enterprise.

The main principles which were adopted by the Rochdale cooperators when they opened their shop were:

1. Open membership: Anyone living in the Rochdale area was allowed to join, 2. Democratic control (one member, one vote), 3. Distribution of surplus income amongst members, once all other expenses had been paid, 4. Political and religious neutrality, 5. Trading for cash only: Members had to pay for their purchases before they could take them away from the shop, 6. Encouragement of education. These principles have been recognized throughout the world as the basis of a genuine co-operative movement. From its humble beginnings in Rochdale the movement has spread to many countries. Local Co-operative Societies have been founded for trading throughout Britain, and a central organization, the Co-operative Wholesale Society, manufactures a wide variety of goods which member Societies can buy from it to sell in their shops. It also acts - as a link between them and helps them to co-operate nationally as well as locally. The International Co-operative Alliance has also been founded to make this co-operation possible amongst members of the movement with similar principles all over the world, in any country where such societies have been or will be founded. It would take a long time to describe all the activities which have been started as a result of the decision taken by the Rochdale Co-operators. Almost 13 million people are members of the Co-operative Movement in Britain, and societies have been founded abroad for all sorts of purposes from simple trading and running shops to hiring farm machinery to members who cannot afford to buy their own; and *Marketing Societies* have been recognized as the best way for producers of food and other crops to sell their produce. This result of their decision to co-operate was certainly not foreseen by the founders of the Rochdale Co-operative Society, but it is the best memorial to them and to their enterprise.

1. Answer the following questions according to the instructions given.

- a) What was the purpose of setting up Co-operative Societies? 1
- b) How did they collect money to open the shop? 1
- c) "This result of their decision to co-operate was certainly not foreseen by the founders"- Explain. 2

2. Find adjectives from the passage which fit these definitions.

- a) not false
- b) all over the world
- c) never thought of before
- d) remaining after expenses have been paid

1×5=5

e) something that keeps remembrance alive

3. Find words in the passage that can complete these sentences.

- a) As he is a man of _____, everyone trusts him.
b) I suppose, we have to mix with a wide _____ of people in our job.
c) The museum is open daily _____ Mondays.
d) You can find things at a _____ price here.

1×4=4

Read the following passage and answer the questions

International Mother Earth Day, on 22 April, promotes harmony with nature and reminds us of the importance of protecting all the different ecosystems and species on our planet. It's a special celebration that brings together people from around the world to remember that planet Earth is our home and we want to live in harmony with nature. We are all responsible for protecting our planet and looking after all the species that live here. April 22 was first established by the UN as International Mother Earth Day in 2009, joining groups that had previously celebrated Earth Day on the same date. The UN website explains that the idea of 'Mother Earth' is used because it 'reflects the interdependence that exists among human beings, other living species and the planet we all inhabit'.

On this day, environmental organizations from all over the world come together to highlight the urgent need to protect the many ecosystems that make up our environment. These ecosystems are under attack from climate change and the natural disasters caused by rising temperatures: forest fires, floods and terrible storms. More than a million animal and plant species are in danger of extinction through loss of habitat, mainly due to human activity. This, in turn, is leading to outbreaks of deadly diseases that spread from wildlife to humans. On International Mother Earth Day, environmentalists call for action to reverse this damage.

The first Earth Day was celebrated in 1970 in the USA after a decade of local protests about air and water pollution in the United States. In 1969, people were angry about a terrible oil spill in Santa Barbara, California, and the damage it caused. US Senator Gaylord Nelson called for a national 'teach-in', bringing together students and teachers to discuss key issues of pollution and conservation.

On 22 April 1970, 20 million people, approximately ten per cent of the total population of the States at the time, joined the 'teach-in' and met in streets, parks and universities across the land to call for a healthy, clean, sustainable environment. Some people think of that day as the birth of the modern environmental movement.

Twenty years later, in 1990, Earth Day went global. More than 200 million people in 141 countries came together to call for environmental issues to be discussed on the world stage. In 1995, Senator Nelson was given an award for his work for the environment.

Today more than one billion people all over the world come together each year to celebrate International Mother Earth Day and remind politicians that action needs to be taken to move towards a more sustainable way of life that works for both people and the planet.

4. What can you do to protect our environment? Write your answer in 3 sentences.

3

5. Answer the following questions according to the instructions given.

1×9=9

- a) The word "devastating" can be replaced by _____
b) A situation when a particular animal or plant stops existing is called _____
c) Explain the word "an ecosystem".
d) We should protect the natural _____ of animals or plants where they can live in uninterrupted. (Fill in the gap with word taken from the passage.)
e) Make a sentence with 'the outbreak of'
f) Make a sentence with 'in harmony with'
g) What is mainly responsible for the loss of animal habitat?

- of dinosaurs occurred millions of years ago. (Fill in the gap with word taken from the passage.)
- i) Choose a word from the passage meaning the same as 'capable of being endured'.

Grammar part -10

Answer the following questions according to the instructions given.

1×10=10

- He started to run fast _____ he should be late for the class. (Use suitable conjunction in the gap)
- We reached there. The sun was setting at that time. (Combine these sentences into a simple sentence)
- It doesn't worth to say lies about it. (Correct this sentence)
- The two first pages of my book has been lost. (Is this sentence correct? Correct the sentence if incorrect)
- The country was hit very (hard/hardly) by the drought. (Choose the correct adverb)
- Students should not be indifferent _____ their studies. (Use appropriate preposition)
- He can not walk a mile _____ ten miles. (Use correct phrase to fill up the gap)
- Had he been more careful, he (not make) the mistake. (Use the verb in the conditional structure)
- I will cut my hair tomorrow. (Correct this sentence based on the causative verb)
- Knowing the fact all present on the spot smiled. (Write whether the underlined word is gerund or present participle)

Writing part- 10

7. To ensure the public health "Food Adulteration" must be brought under control. Do you agree to this statement? Explain your position. 05

8 Write a letter to the sales manager of a company complaining about a damaged product that you have brought recently? 05

Listening-05

9. Listening test will be taken by the course teacher in a convenient time.

05