


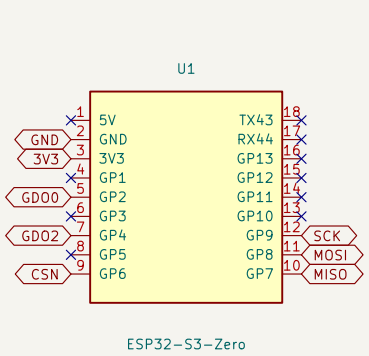








muhradio receiver (env esp32-s3-zero-cc1101 / -bresser): SCK=GP9 MISO=GP7 MOSI=GP8 SS=GP6 GDO0=GP2.

GDO2 is wired to GP4 as a spare (firmware does not use it yet).

Radio 3.3 V comes from the S3-Zero's 3V3 pin through FB1 + C1/C2 to keep WiFi TX noise off the receiver.

Board is powered by the S3-Zero's USB-C. ANT pad is a plated hole for an 86 mm wire (quarter wave at 868 MHz).

Both modules on the top side; the CC1101 sits about 40 mm from the S3-Zero's 2.4 GHz antenna.

Sheet: /		
File: s3zero_cc1101.kicad_sch		
Title: muhradio receiver: ESP32-S3-Zero + CC1101 868 MHz		
Size: A4	Date: 2026-09-15	**Rev: 1.0**
KiCad E.D.A. 10.0.6		Id: 1/1