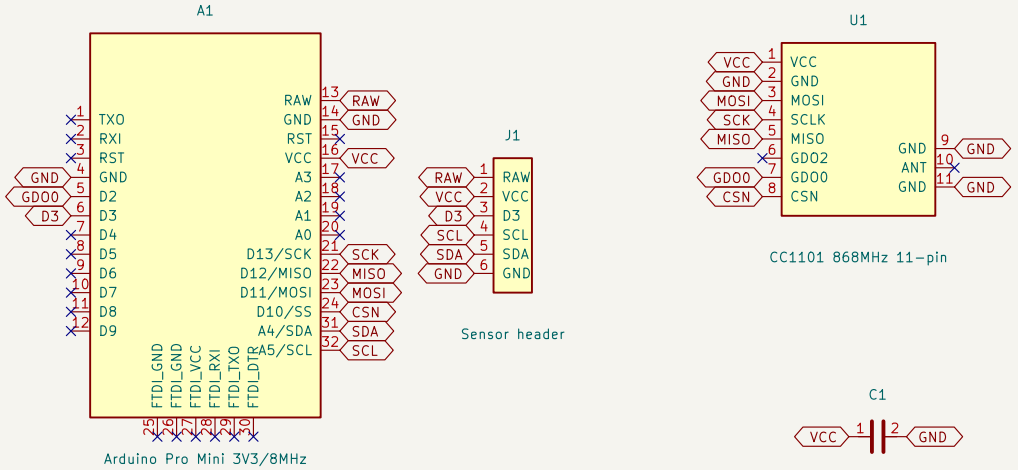


Carrier board: Arduino Pro Mini on top, CC1101 11-pin module on the bottom.

Use a 3.3 V / 8 MHz Pro Mini: the CC1101 is not 5 V tolerant.

C1 is optional bulk decoupling for TX bursts. R1 is the DS18B20 4.7k pull-up (populate only for DS18B20 nodes).

J1 sensor header: RAW VCC D3 SCL SDA GND. GDO2 is not connected so D3 stays free for muhradio sensors.

A4/A5 holes match the SparkFun layout; on other clones jumper A4/A5 to J1 SDA/SCL.

FTDI row pads are plated but unconnected.

Sheet: /
File: promini_cc1101.kicad_sch

Title: Arduino Pro Mini + CC1101 868 MHz carrier

Size: A4	Date: 2026-09-14	**Rev: 1.1**
KiCad E.D.A. 10.0.6		Id: 1/1