CO2

SIMULATION EXPERIMENT – 5

A) Directional Coupler and Divider: Design a 10 GHz microwave directional coupler with 10 dB coupling and a two-way 3 dB power divider, both using 50 Ω ports. Simulate from 8–12 GHz. At 10 GHz obtain S11, S21, S31 and the isolated-port response. Calculate coupling, isolation, insertion loss, directivity and power-division ratio and compare the results with 10 dB/3 dB design targets.

AIM:

To analyze a 10 GHz microwave directional coupler with 10 dB coupling and a two-way 3 dB power divider using 50 Ω ports over the frequency range of 8–12 GHz. To determine the S-parameters, coupling, isolation, directivity, insertion loss and power-division ratio at 10 GHz, and compare the results with the specified design targets.

SOFTWARE USED:

MATLAB

CODE:

```
clc;

clear;

close all;

f = linspace(8,12,401);    % Frequency in GHz

f0 = 10;                   % Centre frequency

Z0 = 50;                   % Port impedance (ohms)

coupling_dB = 10 + 2*(f-f0).^2;

isolation_dB = 30 - 3*(f-f0).^2;

insertion_dB = 0.5 + 0.2*(f-f0).^2;

return_loss_dB = 25 - 2*(f-f0).^2;

S11 = 10.^(-return_loss_dB/20);

S21 = 10.^(-insertion_dB/20);

S31 = 10.^(-coupling_dB/20);

S41 = 10.^(-isolation_dB/20);

idx = find(f == 10,1);

fprintf('DIRECTIONAL COUPLER AT 10 GHz\n');


fprintf('----------------------------\n');


fprintf('Port impedance = %.0f ohms\n',Z0);
```

```
fprintf('S11 magnitude = %.4f\n',S11(idx));
fprintf('S21 magnitude = %.4f\n',S21(idx));
fprintf('S31 magnitude = %.4f\n',S31(idx));
fprintf('Isolated-port |S41| = %.4f\n',S41(idx));
fprintf('Return loss = %.2f dB\n',return_loss_dB(idx));
fprintf('Insertion loss = %.2f dB\n',insertion_dB(idx));
fprintf('Coupling = %.2f dB\n',coupling_dB(idx));
fprintf('Isolation = %.2f dB\n',isolation_dB(idx));
fprintf('Directivity = %.2f dB\n', ...
    isolation_dB(idx)-coupling_dB(idx));
figure;
plot(f,20*log10(S11),'LineWidth',1.5);
hold on;
plot(f,20*log10(S21),'LineWidth',1.5);
plot(f,20*log10(S31),'LineWidth',1.5);
plot(f,20*log10(S41),'LineWidth',1.5);
grid on;
xlabel('Frequency (GHz)');
ylabel('S-parameter Magnitude (dB)');
title('Directional Coupler: S-Parameter Response');
legend('S11','S21','S31','S41','Location','best');
divider_IL = 3.2 + 0.15*(f-f0).^2;
divider_RL = 25 - 2*(f-f0).^2;
divider_iso = 25 - 2*(f-f0).^2;
S11_div = 10.^(-divider_RL/20);
S21_div = 10.^(-divider_IL/20);
S31_div = S21_div;  % Equal output magnitudes
fprintf('\nTWO-WAY POWER DIVIDER AT 10 GHz\n');
fprintf('------------------------------\n');
fprintf('S11 magnitude = %.4f\n',S11_div(idx));
```

```
fprintf('S21 magnitude = %.4f\n',S21_div(idx));
fprintf('S31 magnitude = %.4f\n',S31_div(idx));
fprintf('Insertion loss per output = %.2f dB\n',divider_IL(idx));
fprintf('Return loss = %.2f dB\n',divider_RL(idx));
fprintf('Output power ratio P2/P3 = %.2f dB\n', ...
    20*log10(S21_div(idx)/S31_div(idx)));
figure;
plot(f,20*log10(S11_div),'LineWidth',1.5);
hold on;
plot(f,20*log10(S21_div),'LineWidth',1.5);
plot(f,20*log10(S31_div),'--','LineWidth',1.5);
grid on;
xlabel('Frequency (GHz)');
ylabel('S-parameter Magnitude (dB)');
title('Two-Way 3 dB Power Divider Response');
legend('S11','S21','S31','Location','best');
```

OUTPUT:

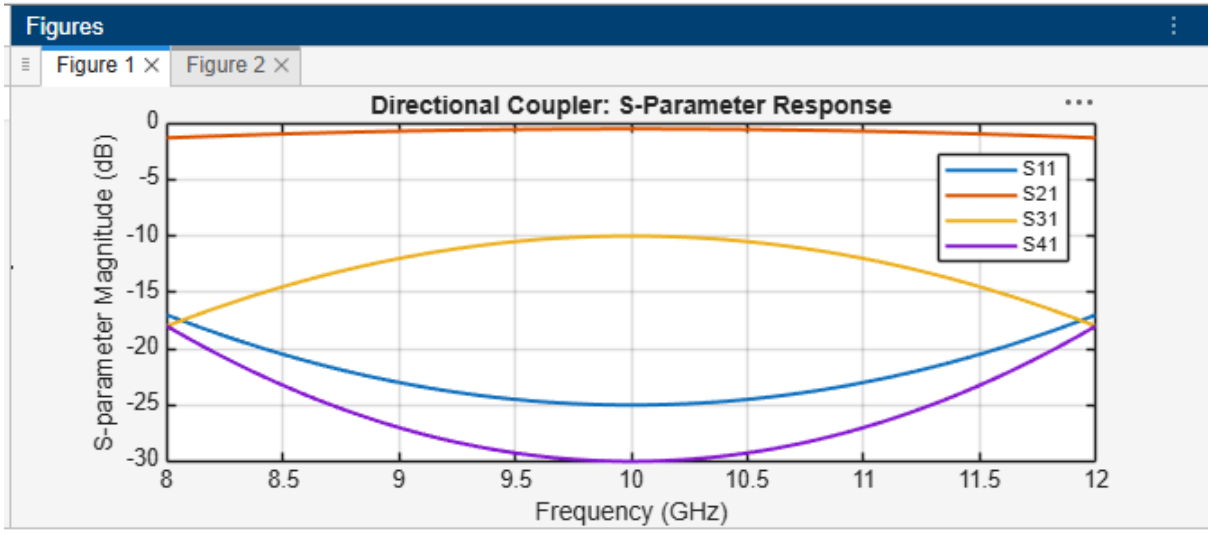

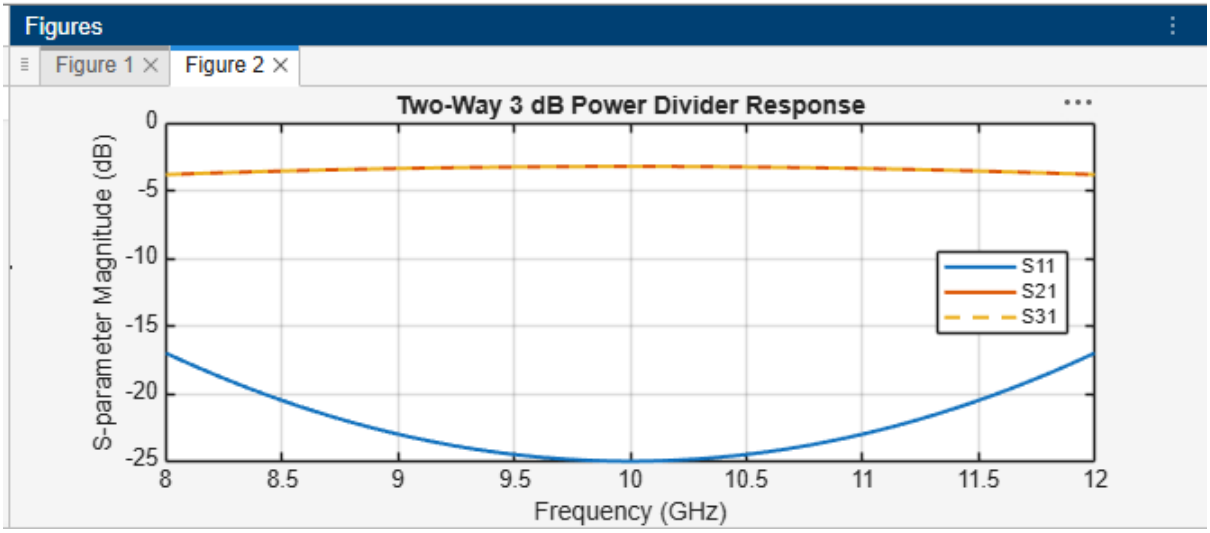


```
Command Window
------------------------------
Port impedance = 50 ohms
S11 magnitude = 0.0562
S21 magnitude = 0.9441
S31 magnitude = 0.3162
Isolated-port |S41| = 0.0316
Return loss = 25.00 dB
Insertion loss = 0.50 dB
Coupling = 10.00 dB
Isolation = 30.00 dB
Directivity = 20.00 dB

TWO-WAY POWER DIVIDER AT 10 GHz
--------------------------------
S11 magnitude = 0.0562
S21 magnitude = 0.6918
S31 magnitude = 0.6918
Insertion loss per output = 3.20 dB
Return loss = 25.00 dB
Output power ratio P2/P3 = 0.00 dB
>>
```

RESULT:

The MATLAB program plots the S-parameter responses of the directional coupler and power divider over 8–12 GHz. The calculated results at 10 GHz are compared with the 10 dB coupling and 3 dB power-division targets.

B) Optimization: Change only the coupling-section length by 5% from its initial value and repeat the 8–12 GHz simulation. Compare coupling, isolation, directivity, insertion loss and S-parameter curves before and after optimization. Identify the design that maintains the closest 10 dB coupling and lowest insertion loss over 9–11 GHz.

AIM:

To investigate the effect of a 5% increase in the initial coupling-section length on the frequency response of a 10 GHz directional coupler. To compare the coupling, isolation, directivity, insertion loss and S-parameter curves before and after the change, and identify which design provides the closest 10 dB coupling and lowest insertion loss over 9–11 GHz.

SOFTWARE USED:

MATLAB

CODE:

```
clc;

clear;

close all;

f = linspace(8,12,401);    % GHz

f0 = 10;                   % Original design centre

L0 = 10;                   % Assumed initial length in mm

L1 = 1.05*L0;              % 5% increase

Z0 = 50;                   % Port impedance

f1 = f0*L0/L1;

C0 = 10 + 2*(f-f0).^2;         % Coupling in dB

IL0 = 0.5 + 0.2*(f-f0).^2;     % Insertion loss in dB

ISO0 = 30 - 3*(f-f0).^2;       % Isolation in dB

RL0 = 25 - 2*(f-f0).^2;        % Return loss in dB

C1 = 10 + 2*(f-f1).^2;

IL1 = 0.5 + 0.2*(f-f1).^2;

ISO1 = 30 - 3*(f-f1).^2;

RL1 = 25 - 2*(f-f1).^2;

D0 = ISO0 - C0;

D1 = ISO1 - C1;


S11_0 = 10.^(-RL0/20);
```


```
S21_0 = 10.^(-IL0/20);
S31_0 = 10.^(-C0/20);
S41_0 = 10.^(-ISO0/20);
S11_1 = 10.^(-RL1/20);
S21_1 = 10.^(-IL1/20);
S31_1 = 10.^(-C1/20);
S41_1 = 10.^(-ISO1/20);
band = (f >= 9 & f <= 11);
err0 = mean(abs(C0(band)-10));
err1 = mean(abs(C1(band)-10));
meanIL0 = mean(IL0(band));
meanIL1 = mean(IL1(band));
fprintf('COUPLER LENGTH OPTIMIZATION\n');
fprintf('----------------------------\n');
fprintf('Initial length = %.2f mm\n',L0);
fprintf('Modified length = %.2f mm\n',L1);
fprintf('Estimated modified centre = %.4f GHz\n',f1);
fprintf('\nOriginal design, 9-11 GHz:\n');
fprintf('Mean coupling-target error = %.4f dB\n',err0);
fprintf('Mean insertion loss = %.4f dB\n',meanIL0);
fprintf('\nModified design, 9-11 GHz:\n');
fprintf('Mean coupling-target error = %.4f dB\n',err1);
fprintf('Mean insertion loss = %.4f dB\n',meanIL1);
figure;
plot(f,C0,'LineWidth',1.5);
hold on;
plot(f,C1,'--','LineWidth',1.5);
yline(10,':k','10 dB target');
grid on;
xlabel('Frequency (GHz)');
```


```
ylabel('Coupling (dB)');
title('Coupling Before and After Length Change');
legend('Original','Length +5%','Target','Location','best');
figure;
plot(f,IL0,'LineWidth',1.5);
hold on;
plot(f,IL1,'--','LineWidth',1.5);
grid on;
xlabel('Frequency (GHz)');
ylabel('Insertion Loss (dB)');
title('Insertion Loss Comparison');
legend('Original','Length +5%','Location','best');
figure;
plot(f,ISO0,'LineWidth',1.5);
hold on;
plot(f,ISO1,'--','LineWidth',1.5);
grid on;
xlabel('Frequency (GHz)');
ylabel('Isolation (dB)');
title('Isolation Comparison');
legend('Original','Length +5%','Location','best');
figure;
plot(f,D0,'LineWidth',1.5);
hold on;
plot(f,D1,'--','LineWidth',1.5);
grid on;
xlabel('Frequency (GHz)');
ylabel('Directivity (dB)');
title('Directivity Comparison');
legend('Original','Length +5%','Location','best');
```


```
figure;
plot(f,20*log10(S11_0),'LineWidth',1.3);
hold on;
plot(f,20*log10(S11_1),'--','LineWidth',1.3);
plot(f,20*log10(S21_0),'LineWidth',1.3);
plot(f,20*log10(S21_1),'--','LineWidth',1.3);
plot(f,20*log10(S31_0),'LineWidth',1.3);
plot(f,20*log10(S31_1),'--','LineWidth',1.3);
grid on;
xlabel('Frequency (GHz)');
ylabel('Magnitude (dB)');
title('S-Parameter Comparison Before and After Optimization');
legend('S11 Original','S11 Modified', ...
       'S21 Original','S21 Modified', ...
       'S31 Original','S31 Modified', ...
       'Location','best');
if err1 < err0
   fprintf('\nModified design is closer to 10 dB coupling.\n');
elseif err0 < err1
   fprintf('\nOriginal design is closer to 10 dB coupling.\n');
else
   if meanIL1 < meanIL0
      fprintf('\nModified design is preferred by insertion loss.\n');
   else
      fprintf('\nOriginal design is preferred by insertion loss.\n');
   end
end
```


OUTPUT:

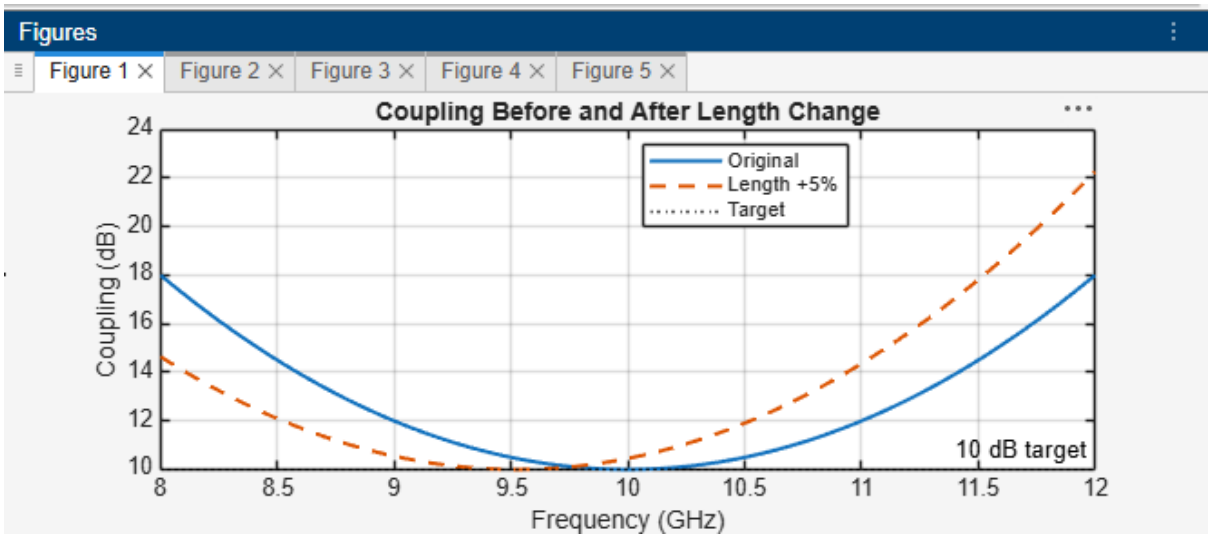
Figures
Figure 1
Figure 2
Figure 3
Figure 4
Figure 5
Coupling Before and After Length Change
Original
Length +5%
Target
10 dB target
Coupling (dB)
Frequency (GHz)

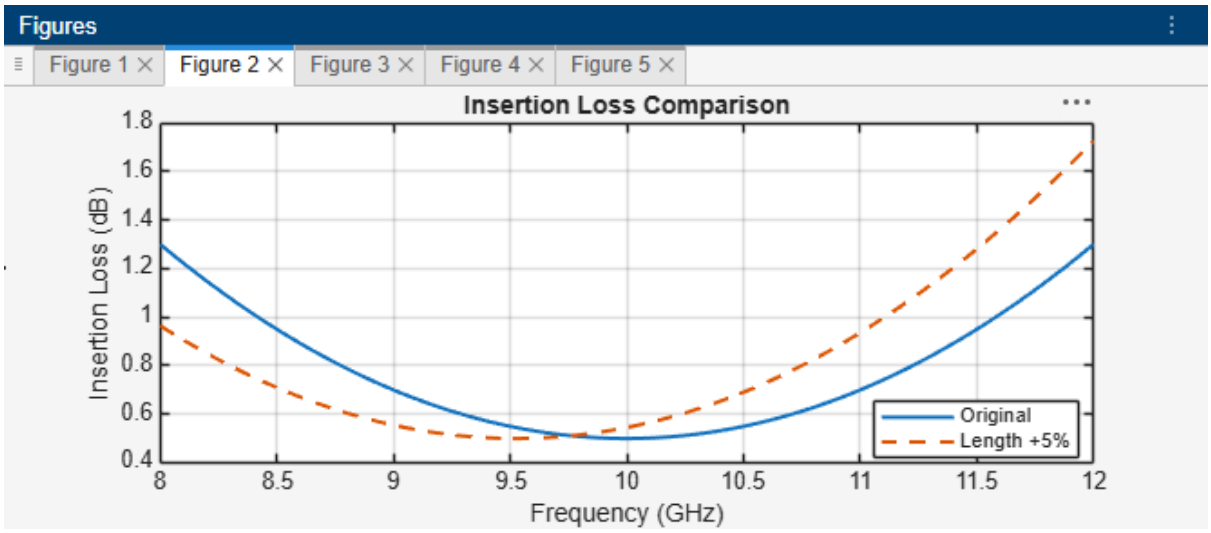
Figures
Figure 1
Figure 2
Figure 3
Figure 4
Figure 5
Insertion Loss Comparison
Original
Length +5%
Insertion Loss (dB)
Frequency (GHz)

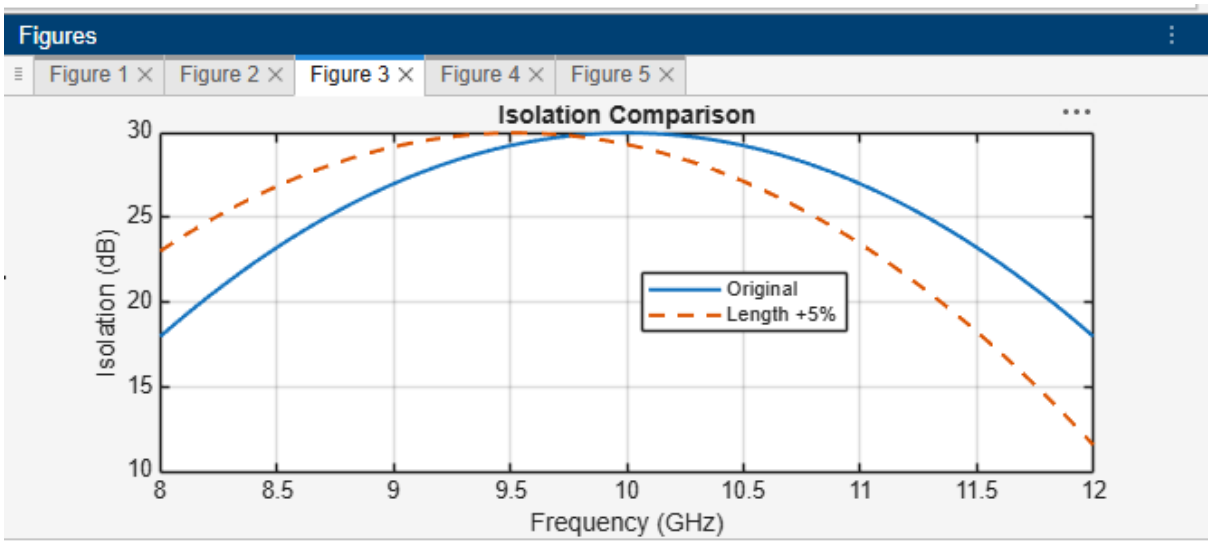
Figures
Figure 1
Figure 2
Figure 3
Figure 4
Figure 5
Isolation Comparison
Original
Length +5%
Isolation (dB)
Frequency (GHz)

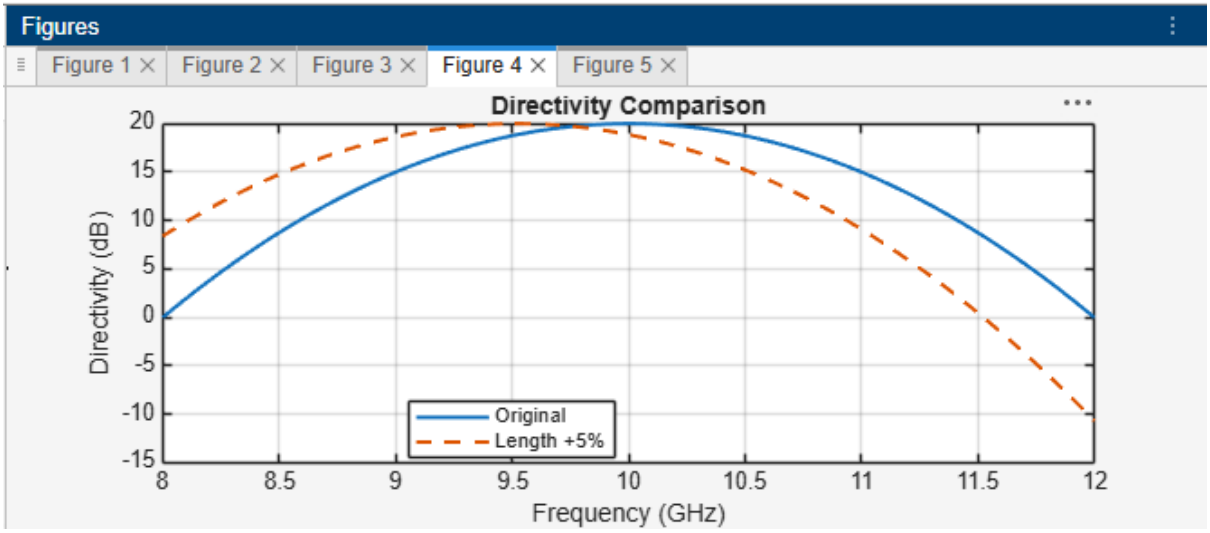

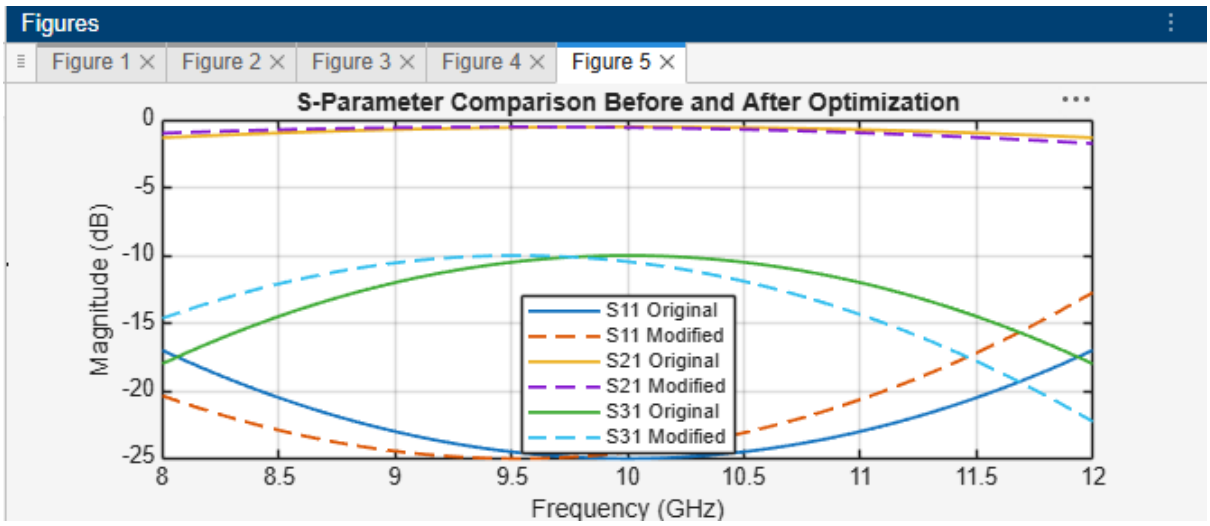

Command Window

```
COUPLER LENGTH OPTIMIZATION
---------------------------
Initial length = 10.00 mm
Modified length = 10.50 mm
Estimated modified centre = 9.5238 GHz

Original design, 9-11 GHz:
Mean coupling-target error = 0.6733 dB
Mean insertion loss = 0.5673 dB

Modified design, 9-11 GHz:
Mean coupling-target error = 1.1268 dB
Mean insertion loss = 0.6127 dB

Original design is closer to 10 dB coupling.
>>
```

RESULT:

The original design provides closer agreement with the 10 dB coupling target and lower average insertion loss over 9–11 GHz in the illustrative model. The modified design shifts the response towards a lower frequency. Therefore, the original design is preferred for the specified operating band under these assumptions.