A.V.KAVERI,

192512188.

EXPERIMENT – 3

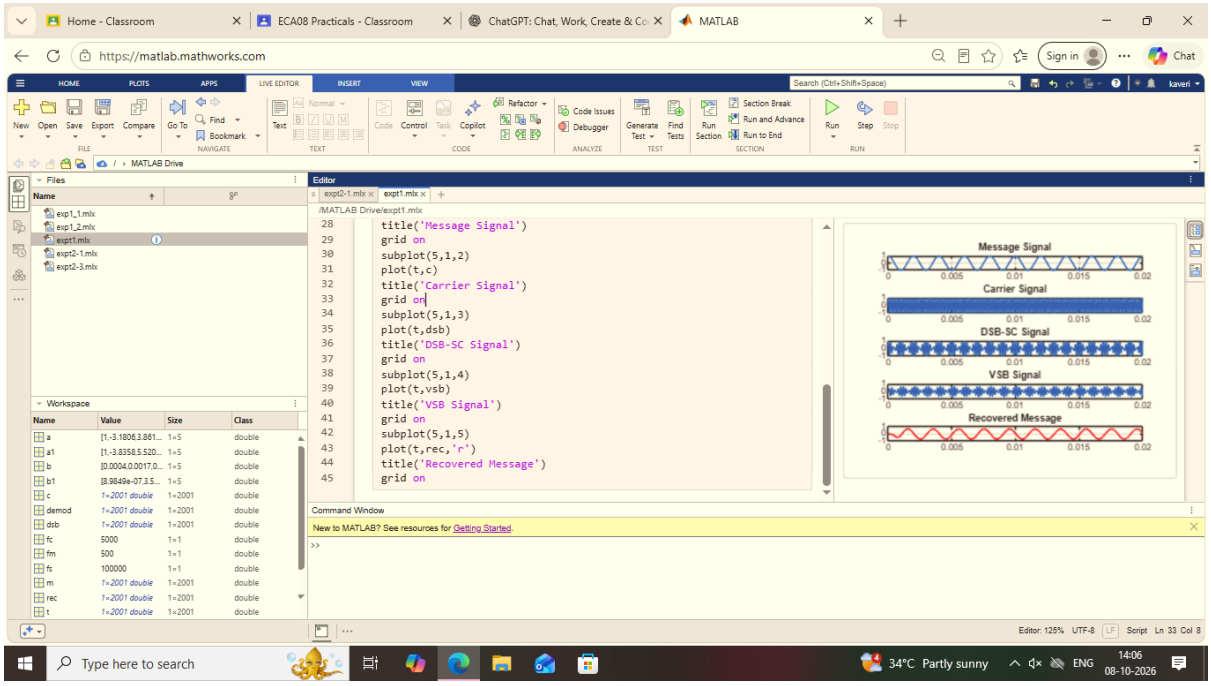
MATLAB-BASED MODELLING OF VSB MODULATOR AND DEMODULATOR FOR ANALOG TELEVISION COMMUNICATION APPLICATIONS

PROGRAM:

```
clc;
clear;
close all;
% Parameters
fs = 100000; % Sampling Frequency
t = 0:1/fs:0.02; % Time Vector
fm = 500; % Message Frequency
fc = 5000; % Carrier Frequency
% Message Signal
m = cos(2*pi*fm*t);
% Carrier Signal
c = cos(2*pi*fc*t);
% DSB-SC Modulation
dsb = m .* c;
% VSB Filter (Low-pass + High-pass Approximation)
[b,a] = butter(4, fc/(fs/2));
vsb = filter(b,a,dsb);
% Coherent Demodulation
demod = vsb .* (2*cos(2*pi*fc*t));
% Recover Message
[b1,a1] = butter(4, 1000/(fs/2));
rec = filter(b1,a1,demod);
% Display Results
```

```
figure;
subplot(5,1,1)
plot(t,m)
title('Message Signal')
grid on
subplot(5,1,2)
plot(t,c)
title('Carrier Signal')
grid on
subplot(5,1,3)
plot(t,dsb)
title('DSB-SC Signal')
grid on
subplot(5,1,4)
plot(t,vsb)
title('VSB Signal')
grid on
subplot(5,1,5)
plot(t,rec,'r')
title('Recovered Message')
grid on
```

OUTPUT:


Message Signal
Carrier Signal
DSB-SC Signal
VSB Signal
Recovered Message
0
0.005
0.01
0.015
0.02