


Name: Omar Mohamed Rady
ID: 22pou98

~~15/20~~

Stretching

~~0.25~~

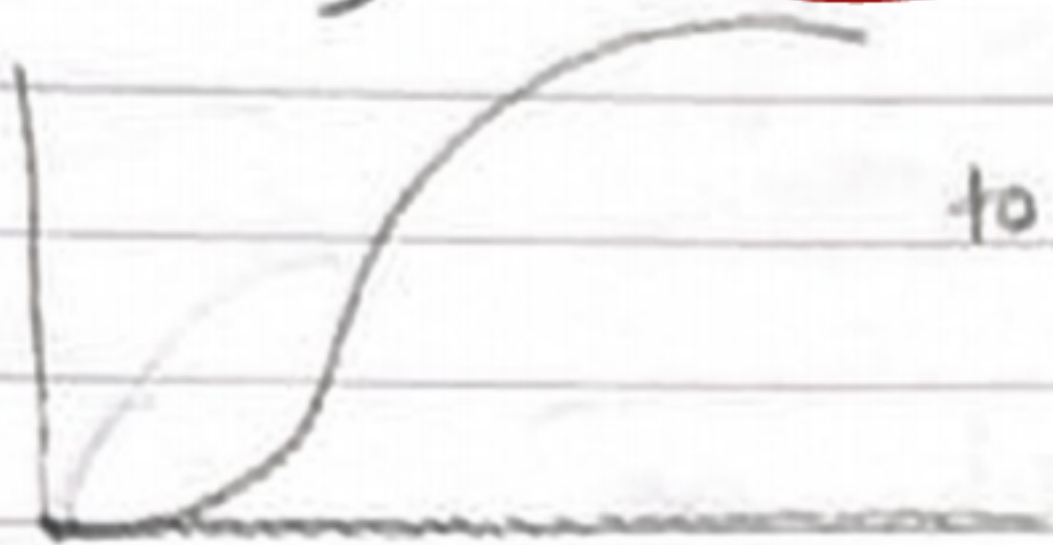

to make more contrast

No Hist x

~~1.75/4~~

missing binarization - 1
No classification - 1

Question 2

For A

Scaling First

1.5 0 0
0 1.5 0
0 0 1

A (4.5, 4.5)

Translation

1 0 2.5
0 1 -1.1
0 0 1

A' (6.5, 3.4)

For B

1.5 0 0
0 1.5 0
0 0 1

B (10.5, 4.5)

1 0 2
0 1 -1.1
0 0 1

B' (12.5, 3.4)

For C

1.5 0 0
0 1.5 0
0 0 1

C (10.5, 10.5)

1 0 2
0 0 -3.9
0 0 1

C' (12.5, 6.6)

~~1/3~~

For D

1.5 0 0 (4.5, 6.5)

0 1.5 0

0 0 1

1

0

0

~~2.5~~~~1.5~~~~1~~

Question 3

TA - H2 - A It is more contrasted

TB - E - H3 negative of the photo so Flip the histogram or reflect

TC - B - H4 H4 shifted to left so Darken

TD - C - H1 H1 shifted to right so Brighten $\gamma < 1$ TE - H5 - F Black is 100% Dark so histogram Dark at side
white is 100% Blank Far left, Bright Far right

A	TA	H2	✓
E	TB	H3	✓
B	TC	H4	✓
C	TD	H1	✓
F	TE	H5	✓

7.5
8

Where is missing graph

Question 4

r	n	P	CDF	S
0	1	$\frac{1}{32}$	$\frac{1}{32}$	0
1	4	$\frac{4}{32}$	$\frac{5}{32}$	1
2	8	$\frac{8}{32}$	$\frac{13}{32}$	3
3	5	$\frac{5}{32}$	$\frac{18}{32}$	4
4	2	$\frac{2}{32}$	$\frac{20}{32}$	4
5	2	$\frac{2}{32}$	$\frac{22}{32}$	5
6	5	$\frac{5}{32}$	$\frac{27}{32}$	6
7	5	$\frac{5}{32}$	1	7

r	n	P	CDF	V
0	0	0	0	0
1	0	0	0	0
2	4	$\frac{4}{32}$	$\frac{4}{32}$	0
3	4	$\frac{4}{32}$	$\frac{8}{32}$	2
4	4	$\frac{4}{32}$	$\frac{12}{32}$	3
5	4	$\frac{4}{32}$	$\frac{16}{32}$	4 $\rightarrow 3.524$
6	5	$\frac{5}{32}$	$\frac{21}{32}$	5
7	11	$\frac{11}{32}$	1	7

~~4.75~~
~~5~~

r	S	V	Z
0	0	0	0 ✓
1	1	0	1 ✓
2	3	0	4 ✓
3	4	2	5 ✓
4	4	3	6 ✓
5	5	4	6 ✓
6	6	5	6 ✓
7	7	7	7 ✓

7 → 7 5 → 6 2 → 4 0 → 0
6 → 6 4 → 5 3 → 5 1 → 0
الموضوع:

التاريخ:

7 6 6 0 4 4 4 0
7 6 5 0 4 0 5 7
6 6 5 4 4 0 5 7
6 6 5 4 5 4 5 7

