


Transformer and shuntreactor AC-Analysis

```
.param tdv=1 tdt=1 fn1=50 omega_n={2*pi*fn1} ; should always be present
.options numdgt=10 plotwinsize=0 ; for accuracy .meas statements
.options vntol=1m abstol=1u ; for accuracy voltage and current
.options meascplxfmt=polar ; for meas AC values in polar format
.options logparams ; To put input parameters of all devices to the log file
```

.ac list 49.999 50 50.001

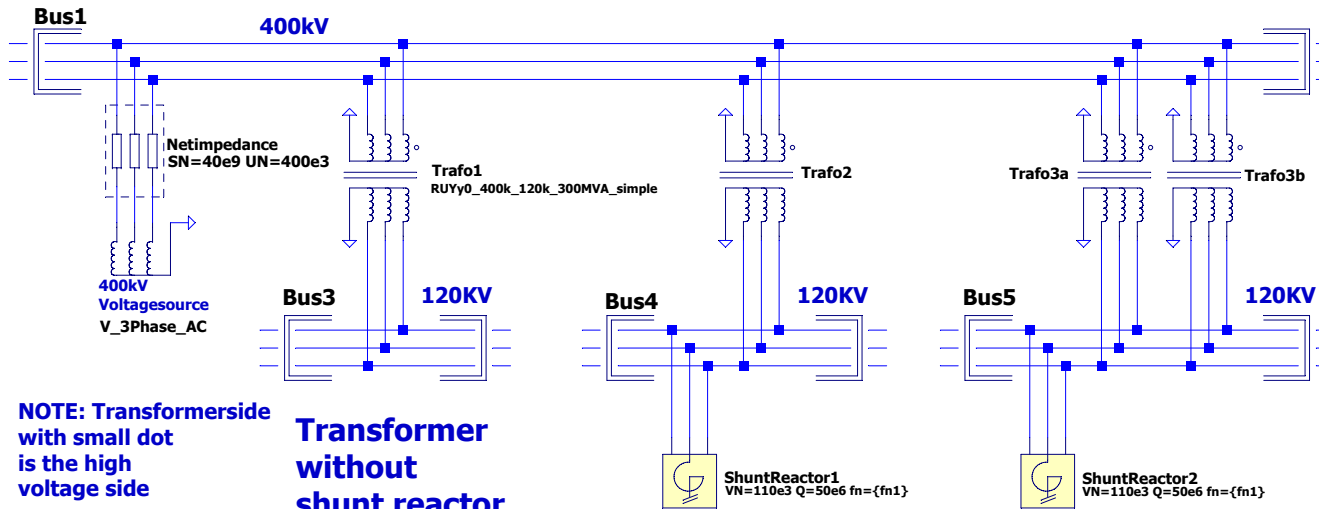

See the measurements:
Activate schematic window
View->Spice Output log
Scroll to the end of the file

```
; Reactive powers: (at Shuntreactor 1,2,3)
.meas AC QSR_1 FIND 3*Ix(ShuntReactor1:L1)*v(bus4a:L1) at 50
.meas AC QSR_2 FIND 3*Ix(ShuntReactor2:L1)*v(bus5a:L1) at 50
.meas AC QSR_3 FIND 3*Ix(ShuntReactor3:L1)*v(bus7a:L1) at 50
; Voltages: (at Shuntreactor 1,2,3)
.meas AC VSR_1 FIND v(bus4:L1) at 50
.meas AC VSR_2 FIND v(bus5:L1) at 50
.meas AC VSR_3 FIND v(bus7:L1) at 50
; Currents: (at Shuntreactor 1,2,3)
.meas AC ISR_1 FIND Ix(ShuntReactor1:L1) at 50
.meas AC ISR_2 FIND Ix(ShuntReactor2:L1) at 50
.meas AC ISR_3 FIND Ix(ShuntReactor3:L1) at 50
```

To see the simulation voltage results simply click on the lines
To see the currents click on the input pins of the device
The left buses measurement pins shows the line to line voltages
The right buses measurement pins shows the line to ground voltages