Opamp_2stg_Diff_ClassA: differential first stage + class-A second stage (STB testbench)

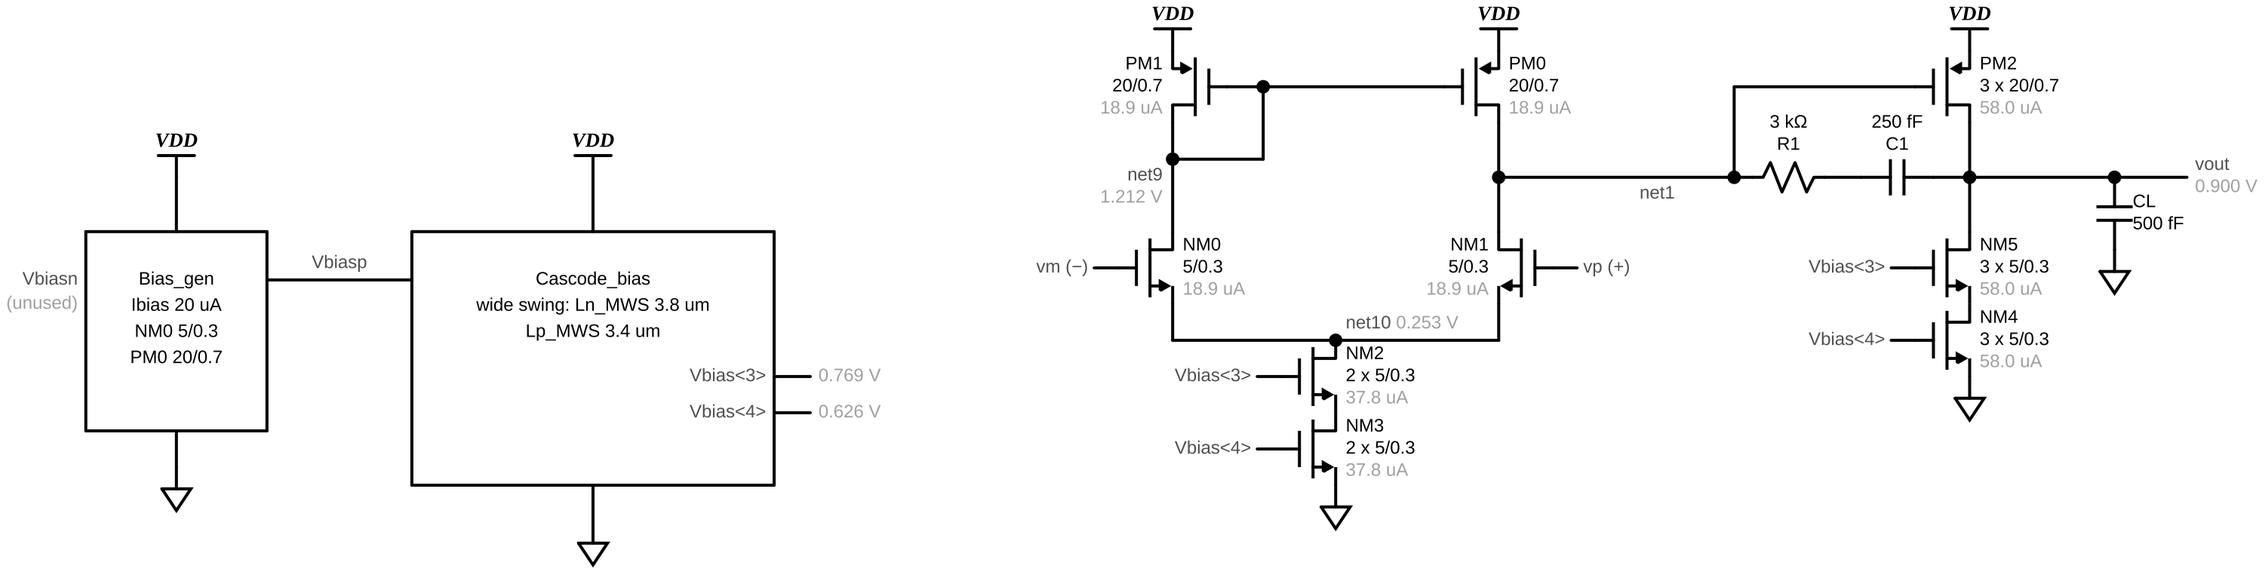

Sizes: multiplier x W/L in um (nf = 1), sky130 LVT devices. Currents and node voltages: tt, 27 °C, VDD = 1.8 V.
First stage = Diffamp1, second stage = ClassA_stg_PMOS; Rz and Cc between the stage-1 output and vout. Inputs are swapped at the top level because the second stage inverts.
Simulated (ngspice, tt, 27 C): loop gain 60.6 dB, UGF 126.0 MHz, PM 31.5 deg, GM 11.0 dB.