Aryan Langhanoja 9220013 3030

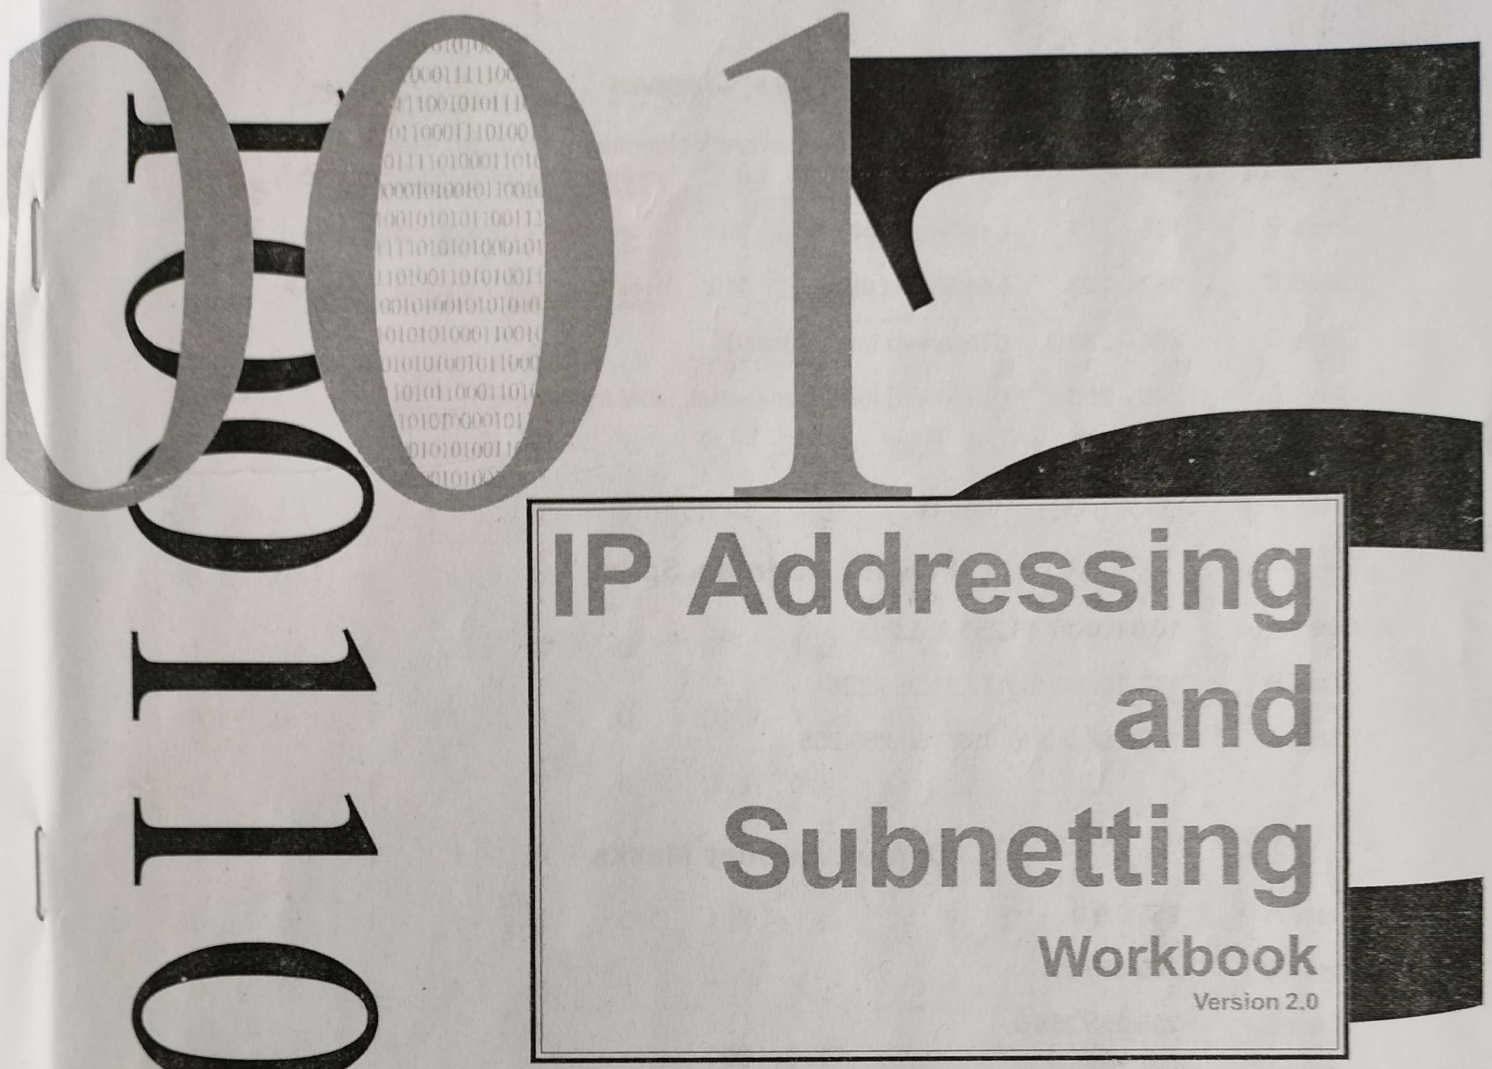

11111110

10010101

00011011

10000110

11010011

Student Name:
Aryan Langhanoja
9220013 3030

IP Address Classes

Class A	1 – 127	(Network 127 is reserved for loopback and internal testing) Leading bit pattern	0	00000000.00000000.00000000.00000000 Network . Host . Host . Host
Class B	128 – 191	Leading bit pattern	10	10000000.00000000.00000000.00000000 Network . Network . Host . Host
Class C	192 – 223	Leading bit pattern	110	11000000.00000000.00000000.00000000 Network . Network . Network . Host
Class D	224 – 239	(Reserved for multicast)		
Class E	240 – 255	(Reserved for experimental, used for research)		

Private Address Space

Class A	10.0.0.0 to 10.255.255.255
Class B	172.16.0.0 to 172.31.255.255
Class C	192.168.0.0 to 192.168.255.255

Default Subnet Masks

Class A	255.0.0.0
Class B	255.255.0.0
Class C	255.255.255.0

Produced by: Robb Jones
jonesr@careertech.net and/or Robert.Jones@fcps.org
Frederick County Career & Technology Center
Cisco Networking Academy
Frederick County Public Schools
Frederick, Maryland, USA

Special Thanks to Melvin Baker and Jim Dorsch
for taking the time to check this workbook for errors,
and to everyone who has sent in suggestions to improve the series.

Workbooks included in the series:

IP Addressing and Subnetting Workbooks
ACLs - Access Lists Workbooks
VLSM Variable-Length Subnet Mask Workbooks

Binary To Decimal Conversion

128	64	32	16	8	4	2	1	Answers
1	0	0	1	0	0	1	0	146
0	1	1	1	0	1	1	1	119
1	1	1	1	1	1	1	1	255
1	1	0	0	0	1	0	1	197
1	1	1	1	0	1	1	0	246
0	0	0	1	0	0	1	1	19
1	0	0	0	0	0	0	1	129
0	0	1	1	0	0	0	1	49
0	1	1	1	1	0	0	0	120
1	1	1	1	0	0	0	0	240
0	0	1	1	1	0	1	1	59
0	0	0	0	0	1	1	1	7
						00011011		27
						10101010		170
						01101111		111
						11111000		248
						00100000		32
						01010101		85
						00111110		62
						00000011		3
						11101101		237
						11000000		192

Scratch Area

128 64
16 32
2 16
146 4
2
1
119

Decimal To Binary Conversion

Use all 8 bits for each problem

128	64	32	16	8	4	2	1	= 255
1	1	1	0	1	1	1	0	238
0	0	1	0	0	0	1	0	34
0	1	1	1	1	0	1	1	123
0	0	1	1	0	0	1	0	50
1	1	1	1	1	1	1	1	255
1	1	0	0	1	0	0	0	200
0	0	0	0	1	0	1	0	10
1	0	0	0	1	0	1	0	138
0	0	0	0	0	0	0	1	1
0	0	0	0	1	1	0	1	13
1	1	1	1	1	0	1	0	250
0	1	1	0	1	0	1	1	107
1	1	1	0	0	0	0	0	224
0	1	1	1	0	0	1	0	114
1	1	0	0	0	0	0	0	192
1	0	1	0	1	1	0	0	172
0	1	1	0	0	1	0	0	100
0	1	1	1	0	1	1	1	119
0	0	1	1	1	0	0	1	57
0	1	1	0	0	0	1	0	98
1	0	1	1	0	0	1	1	179
0	0	0	0	0	0	1	0	2

2

Scratch Area

238
-128
110
-64
46
-32
14
-8
6
-4
2
-2
0

34
-32
2
-2
0

Address Class Identification

Address	Class
10.250.1.1	A
150.10.15.0	B
192.14.2.0	C
148.17.9.1	B
193.42.1.1	C
126.8.156.0	A
220.200.23.1	C
230.230.45.58	D
177.100.18.4	B
119.18.45.0	A
249.240.80.78	E
199.155.77.56	C
117.89.56.45	A
215.45.45.0	C
199.200.15.0	C
95.0.21.90	A
33.0.0.0	A
158.98.80.0	B
219.21.56.0	C

Default Subnet Masks

Write the correct default subnet mask for each of the following addresses:

177.100.18.4	255 . 255 . 0 . 0
119.18.45.0	255 . 0 . 0 . 0
191.249.234.191	255 . 255 . 0 . 0
223.23.223.109	255 . 255 . 255 . 0
10.10.250.1	255 . 0 . 0 . 0
126.123.23.1	255 . 0 . 0 . 0
223.69.230.250	255 . 0 . 0 . 0
192.12.35.105	255 . 255 . 255 . 0
77.251.200.51	255 . 0 . 0 . 0
189.210.50.1	255 . 255 . 0 . 0
88.45.65.35	255 . 0 . 0 . 0
128.212.250.254	255 . 255 . 0 . 0
193.100.77.83	255 . 255 . 255 . 0
125.125.250.1	255 . 0 . 0 . 0
1.1.10.50	255 . 0 . 0 . 0
220.90.130.45	255 . 255 . 255 . 0
134.125.34.9	255 . 255 . 0 . 0
95.250.91.99	255 . 0 . 0 . 0

Host Addresses

Using the IP address and subnet mask shown write out the host address:

188.10.18.2 255.255.0.0	0.0.18.2
10.10.48.80 255.255.255.0	0.0.0.80
222.49.49.11 255.255.255.0	0.0.0.11
128.23.230.19 255.255.0.0	0.0.230.19
10.10.10.10 255.0.0.0	0.10.10.10
200.113.123.11 255.255.255.0	0.0.0.11
223.169.23.20 255.255.0.0	0.0.23.20
203.20.35.215 255.255.255.0	0.0.0.215
117.15.2.51 255.0.0.0	0.15.2.51
199.120.15.135 255.255.255.0	0.0.0.135
191.55.165.135 255.255.255.0	0.0.0.135
48.21.25.54 255.255.0.0	0.0.25.54

Network Addresses

Using the IP address and subnet mask shown write out the network address:

188.10.18.2 255.255.0.0	188 . 10 . 0 . 0
10.10.48.80 255.255.255.0	10 . 10 . 48 . 0
192.149.24.191 255.255.255.0	192.149.24.0
150.203.23.19 255.255.0.0	150.203.0.0
10.10.10.10 255.0.0.0	10.0.0.0
186.13.23.110 255.255.255.0	186.13.23.0
223.69.230.250 255.255.0.0	223.69.0.0
200.120.135.15 255.255.255.0	200.120.135.0
27.125.200.151 255.0.0.0	27.0.0.0
199.20.150.35 255.255.255.0	192.20.150.0
191.55.165.135 255.255.255.0	191.55.165.0
28.212.250.254 255.255.0.0	28.212.0.0

Network & Host Identification

Circle the network portion of these addresses:

177.100.18.4

119.18.45.0

209.240.80.78

199.155.77.56

117.89.56.45

215.45.45.0 class D

192.200.15.0

95.0.21.90

33.0.0.0

158.98.80.0

217.21.56.0

10.250.1.1

150.10.15.0

192.14.2.0

148.17.9.1

193.42.1.1

126.8.156.0

220.200.23.1

Circle the host portion of these addresses:

10.15.123.50

171.2.199.31

198.125.87.177

223.250.200.222

17.45.222.45

126.201.54.231

191.41.35.112

155.25.169.227

192.15.155.2

123.102.45.254

148.17.9.155

100.25.1.1

195.0.21.98

25.250.135.46

171.102.77.77

55.250.5.5

218.155.230.14

10.250.1.1

ANDING With
Default subnet masks

Every IP address must be accompanied by a subnet mask. By now you should be able to look at an IP address and tell what class it is. Unfortunately your computer doesn't think that way. For your computer to determine the network and subnet portion of an IP address it must "AND" the IP address with the subnet mask.

Default Subnet Masks:

Class A	255.0.0.0
Class B	255.255.0.0
Class C	255.255.255.0

ANDING Equations:

1 AND 1 = 1
1 AND 0 = 0
0 AND 1 = 0
0 AND 0 = 0

Sample:

What you see...

IP Address: 192 . 100 . 10 . 33

What you can figure out in your head...

Address Class:	C
Network Portion:	**192 . 100 . 10** . 33
Host Portion:	192 . 100 . 10 . **33**

In order for you computer to get the same information it must AND the IP address with the subnet mask in binary.

	Network	Host	
IP Address:	11000000.01100100.00001010.	00100001	(192 . 100 . 10 . 33)
Default Subnet Mask:	11111111.11111111.11111111.	00000000	(255 . 255 . 255 . 0)
AND:	11000000.01100100.00001010.	00000000	(192 . 100 . 10 . 0)

ANDING with the default subnet mask allows your computer to figure out the network portion of the address.

Custom Subnet Masks

Problem 1

Number of needed subnets **14**
Number of needed usable hosts **14**
Network Address **192.10.10.0**

Address class C

Default subnet mask 255 . 255 . 255 . 0

Custom subnet mask 255 . 255 . 255 . 240

Total number of subnets 16

Total number of host addresses 16

Number of usable addresses 14

Number of bits borrowed 4

Show your work for Problem 1 in the space below.

	256	128	64	32	16	8	4	2	– Number of Hosts
Number of Subnets –	2	4	8	16	32	64	128	256	
	128	64	32	16	8	4	2	1	– Binary values
192 . 10 . 10 .	0	0	0	0	0	0	0	0	

Add the binary value numbers to the left of the line to create the custom subnet mask.

128
64
32
+16
240

16 Observe the total number of hosts.
−2 Subtract 2 for the number of usable hosts.
14

Class C Address unsubnetted:

195. 223 . 50 . 0

195.223.50.0 to 195.223.50.255

Notice that the subnet and broadcast addresses match.

Class C Address subnetted (2 bits borrowed):

195. 223 . 50 . 0 0 | 0 0 0 0 0 0

(Invalid range) (0) 195.223.50.0 to 195.223.50.63
(1) 195.223.50.64 to 195.223.50.127
(2) 195.223.50.128 to 195.223.50.191
(Invalid range) (3) 195.223.50.192 to 195.223.50.255

The primary reason the the zero and broadcast subnets were not used had to do pirmarily with the broadcast addresses. If you send a broadcast to 195.223.255 are you sending it to all 255 addresses in the classful C address or just the 62 usable addresses in the broadcast range?

The **CCNA** and **CCENT** certification exams may have questions which will require you to determine which formula to use, and whehter or not you can use the first and last subnets. Use the chart below to help decide.

When to use which formula to determine the number of subnets	
Use the $2^s - 2$ formula and **don't use** the zero and broadcast ranges if...	Use the 2^s formula and **use** the zero and broadcast ranges if...
Classful routing is used	Classless routing or VLSM is used
RIP version 1 is used	RIP version 2, EIGRP, or OSPF is used
The ***no ip subnet zero*** command is configured on your router	The ***ip subnet zero*** command is configured on your router (default setting)
	No other clues are given

Bottom line for the CCNA exams; if a question does not give you any clues as to whether or not to allow these two subnets, assume you can use them.

This workbook has you use the number of subnets = 2^s formula.

How to determine the number of subnets and the number of hosts per subnet

Two formulas can provide this basic information:

Number of subnets = 2^s (Second subnet formula: **Number of subnets = 2^s - 2**)

Number of hosts per subnet = 2^h - 2

Both formulas calculate the number of hosts or subnets based on the number of binary bits used. For example if you borrow three bits from the host portion of the address use the *number of subnets* formula to determine the total number of subnets gained by borrowing the three bits. This would be 2^3 or 2 x 2 x 2 = 8 subnets

To determine the number of hosts per subnet you would take the number of binary bits used in the host portion and apply this to the *number of hosts per subnet* formula If five bits are in the host portion of the address this would be 2^5 or 2 x 2 x 2 x 2 x 2 = 32 hosts.

When dealing with the *number of hosts per subnet* you have to subtract two addresses from the range. The first address in every range is the subnet number. The last address in every range is the broadcast address. These two addresses cannot be assigned to any device in the network which is why you have to subtract two addresses to find the number of usable addresses in each range.

For example if two bits are borrowed for the network portion of the address you can easily determine the number of subnets and hosts per subnets using the two formulas.

195. 223 . 50 . 0 0 | 0 0 0 0 0 0

The number of subnets created by borrowing 2 bits is 2^2 or 2 x 2 = 4 subnets.

The number of hosts created by leaving 6 bits is 2^6 - 2 or 2 x 2 x 2 x 2 x 2 x 2 = 64 - 2 = 62 usable hosts per subnet.

What about that second subnet formula:

Number of subnets = 2^s - 2

In some instances the first and last subnet range of addresses are reserved. This is similar to the first and last host addresses in each range of addreses.

The first range of addresses is the ***zero subnet***. The subnet number for the *zero subnet* is also the subnet number for the classful subnet address.

The last range of addresses is the ***broadcast subnet***. The broadcast address for the last subnet in *the broadcast subnet* is the same as the classful broadcast address.

ANDING With
Custom subnet masks

When you take a single network such as 192.100.10.0 and divide it into five smaller networks (192.100.10.16, 192.100.10.32, 192.100.10.48, 192.100.10.64, 192.100.10.80) the outside world still sees the network as 192.100.10.0, but the internal computers and routers see five smaller subnetworks. Each independent of the other. This can only be accomplished by using a custom subnet mask. A custom subnet mask borrows bits from the host portion of the address to create a subnetwork address between the network and host portions of an IP address. In this example each range has 14 usable addresses in it. The computer must still AND the IP address against the custom subnet mask to see what the network portion is and which subnetwork it belongs to.

IP Address: 192 . 100 . 10 . 0
Custom Subnet Mask: 255.255.255.240

Address Ranges:
192.10.10.0 to 192.100.10.15
192.100.10.16 to 192.100.10.31
192.100.10.32 to 192.100.10.47 (Range in the sample below)
192.100.10.48 to 192.100.10.63
192.100.10.64 to 192.100.10.79
192.100.10.80 to 192.100.10.95
192.100.10.96 to 192.100.10.111
192.100.10.112 to 192.100.10.127
192.100.10.128 to 192.100.10.143
192.100.10.144 to 192.100.10.159
192.100.10.160 to 192.100.10.175
192.100.10.176 to 192.100.10.191
192.100.10.192 to 192.100.10.207
192.100.10.208 to 192.100.10.223
192.100.10.224 to 192.100.10.239
192.100.10.240 to 192.100.10.255

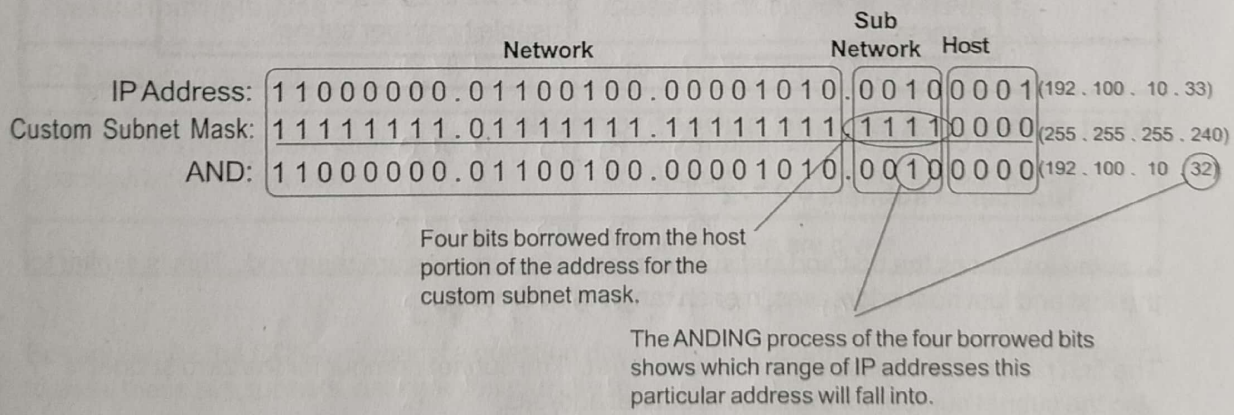

In the next set of problems you will determine the necessary information to determine the correct subnet mask for a variety of IP addresses.

Custom Subnet Masks

Problem 2

Number of needed subnets **1000**
Number of needed usable hosts **60**
Network Address **165.100.0.0**

Address class B

Default subnet mask 255 . 255 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 192

Total number of subnets 1,024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

Show your work for Problem 2 in the space below.

									.								
Number of Hosts –	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	.	256	128	64	32	16	8	4	2
Number of Subnets –	2	4	8	16	32	64	128	256.		512	1024	2048	4,096	8,192	16,384	32,768	65,536
Binary values –	128	64	32	16	8	4	2	1	.	128	64	32	16	8	4	2	1
165 . 100 .	0	0	0	0	0	0	0	0	.	0	0	0	0	0	0	0	0

Add the binary value numbers to the left of the line to create the custom subnet mask.

128
64
32
16
8
4
2
+1
255

128
+64
192

64 Observe the total number of hosts.
-2 Subtract 2 for the number of usable hosts.
62

Custom Subnet Masks

Problem 3

/26 indicates the total number of bits used for the network and subnetwork portion of the address. All bits remaining belong to the host portion of the address.

Network Address **148.75.0.0 /26**

Address class B

Default subnet mask 255 . 255 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 192

Total number of subnets 1,024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

Show your work for Problem 3 in the space below.

										.								
Number of Hosts	-	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	.	256	128	64	32	16	8	4	2
Number of Subnets	-	2	4	8	16	32	64	128	256	.	512	1024	2048	4,096	8,192	16,384	32,768	65,536
Binary values	-	128	64	32	16	8	4	2	1	.	128	64	32	16	8	4	2	1
148 . 75 .		0	0	0	0	0	0	0	0	.	0	0	0	0	0	0	0	0

Add the binary value numbers to the left of the line to create the custom subnet mask.

```
128
 64
 32
 16
  8
  4
  2
 +1
---
255
```

```
128
+64
---
192
```

```
1024
  -2
------
1,022
```

Subtract 2 for the total number of subnets to get the usable number of subnets.

```
 64
 -2
----
 62
```

Observe the total number of hosts.

Subtract 2 for the number of usable hosts.

Custom Subnet Masks

Problem 4

Number of needed subnets **6**
Number of needed usable hosts **30**
Network Address **195.85.8.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.224

Total number of subnets 8

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 3

Show your work for Problem 5 in the space below.

		256	128	64	32	16	8	4	2	– Number of Hosts
Number of Subnets	–	2	4	8	16	32	64	128	256	
		128	64	32	16	8	4	2	1	– Binary values
195.85.8.		0	0	0	0	0	0	0	0	

Custom Subnet Masks

Problem 5

Number of needed subnets **6**
Number of needed usable hosts **30**
Network Address **210.100.56.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.224

Total number of subnets 8

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 3

Show your work for Problem 4 in the space below.

	256	128	64	32	16	8	4	2	– Number of Hosts
Number of Subnets –	2	4	8	16	32	64	128	256	
	128	64	32	16	8	4	2	1	– Binary values
210 . 100 . 56 .	0	0	0	0	0	0	0	0	

Custom Subnet Masks

Problem 9

Number of needed subnets **60**
Number of needed usable hosts **1,000**
Network Address **128.77.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.252.0

Total number of subnets 64

Total number of host addresses 1024

Number of usable addresses 1022

Number of bits borrowed 6

Show your work for Problem 9 in the space below.

0	0	0	0	0	0	0	0
128	64	32	16	8	4	2	1

Custom subnet - 255.255.252.0

Total subnet - 64

- 1024
- 1022
- 6

Custom Subnet Masks

Problem 8

Number of needed subnets **3**
Number of needed usable hosts **45**
Network Address **200.175.14.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.192

Total number of subnets 4

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 2

Show your work for Problem 8 in the space below.

0	0	0	0	0	0	0	0
128	64	32	16	8	4	2	1

128
64
192

Custom Subnet Masks

Problem 7

Number of needed subnets **2000**
Number of needed usable hosts **15**
Network Address **178.100.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.255.224

Total number of subnets 2048

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 11

Show your work for Problem 7 in the space below.

Number of Hosts	-	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2		
Number of Subnets	-	2	4	8	16	32	64	128	256	512	1024	2048	4,096	8,192	16,384	32,768	65,536		
Binary values	-	128	64	32	16	8	4	2	1	. 128	64	32	16	8	4	2	1		
178 . 100 . 0		0	0	0	0	0	0	0	0	. 0	0	0	0	0	0	0	0		

Custom Subnet Masks

Problem 6

Number of needed subnets **126**
Number of needed usable hosts **131,070**
Network Address **118.0.0.0**

Address class A

Default subnet mask 255.0.0.0

Custom subnet mask 255.254.0.0

Total number of subnets 128

Total number of host addresses 1,31,072

Number of usable addresses 1,31,070

Number of bits borrowed 7

Show your work for Problem 6 in the space below.

Number of Hosts	4,194,304	2,097,152	1,048,576	524,288	262,144	131,072	65,536	32,768	16,384	8,192	4,096	2048	1,024	512	256	128	64	32	16	8	4	2
Number of Subnets	–	2	4	8	16	32	64	128	256	512	1,024	2,048	4,096	8,192	16,384	32,768	65,536	131,072	262,144	524,288	1,048,576	2,097,152	4,194,304
Binary values	–128	64	32	16	8	4	2	1	.128	64	32	16	8	4	2	1	. 128	64	32	16	8	4	2	1
118.	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0	0	0

Custom Subnet Masks

Problem 10

Number of needed usable hosts **60**

Network Address **198.100.10.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.192

Total number of subnets 4

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 2

Show your work for Problem 10 in the space below.

0	0	0	0	0	0	0	0
128	64	32	16	8	4	2	1

128
64
192

255.255.255.192

4
64
62
2

Custom Subnet Masks

Problem 14

Number of needed subnets **10**

Network Address **172.59.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.240.0

Total number of subnets 16

Total number of host addresses 4096

Number of usable addresses 4094

Number of bits borrowed 4

Show your work for Problem 14 in the space below.

0 0 0 0 0 0 0 0

.240 . 0

16

4096

4094

4

Custom Subnet Masks

Problem 13

Number of needed usable hosts **25**

Network Address **218.35.50.0**

Address class C

Default subnet mask 255 . 255 . 255 . 0

Custom subnet mask 255 . 255 . 255 . 224

Total number of subnets 8

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 3

Show your work for Problem 13 in the space below.

0	0	0	0	0	0	0	0
128	64	32	16	8	4	2	1

128
64
192

224
16
240

~~192~~ .224
4
32
30
5
8

Custom Subnet Masks

Problem 12

Number of needed subnets **5**

Network Address **218.35.50.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.224

Total number of subnets 8

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 3

Show your work for Problem 12 in the space below.

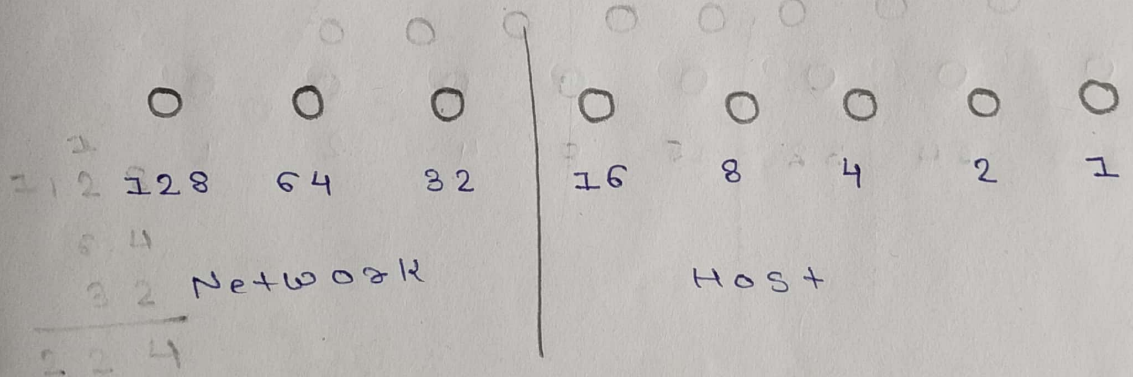

Custom Subnet Masks

Problem 11

Number of needed subnets **250**

Network Address **101.0.0.0**

Address class A

Default subnet mask 255.0.0.0

Custom subnet mask 255.255.0.0

Total number of subnets 256

Total number of host addresses 65,536

Number of usable addresses 65,534

Number of bits borrowed 8

Show your work for Problem 11 in the space below.

Custom Subnet :- 255.255.0.0

Total Subnet :- 256

Total hA :- 65536

useable hA : 65534

bits borrowed - 8

Custom Subnet Masks

Problem 15

Number of needed usable hosts **50**

Network Address **172.59.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.192.0 (255.192)

Total number of subnets 1024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

Show your work for Problem 15 in the space below.

128
64
192

.192.0
1024
64
62
10

Custom Subnet Masks

Problem 16

Number of needed usable hosts **29**

Network Address **23.0.0.0**

Address class A

Default subnet mask 255 . 0 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 224

Total number of subnets 5, 24, 288

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 19

Show your work for Problem 16 in the space below.

0	0	0	0	0	0	0	0
128	64	32	16	8	4	2	1

255 . 255 . 255 . 224

128
64
32
224

5, 24, 288

32
30
19

Show your work for **Problem 2** in the space below.

Number of Hosts –		65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	. 256	128	64 32	16	8	4	2	
Number of Subnets –		2	4	8	16	32	64	128	256.	512	1024	2048	4,096	8,192	16,384	32,768	65,536
Binary values –		128	64	32	16	8	4	2	1 .	128	64	32	16	8	4	2	1
165 . 100 .		0	0	0	0	0	0	0	0 .	0	0	0	0	0	0	0	0

Subnet	Bits	Subnet number		Broadcast address
(1)	. 0	165.100.0.0	to	165.100.0.63
(2)	1	165.100.0.64	to	165.100.0.127
(3)	1 0	165.100.0.128	to	165.100.0.191
(4)	1 1	165.100.0.192	to	165.100.0.255
(5)	1 . 0 0	165.100.1.0	to	165.100.1.63
(6)	1 . 0 1	165.100.1.64	to	165.100.1.127
(7)	1 . 1 0	165.100.1.128	to	165.100.1.191
(8)	1 . 1 1	165.100.1.192	to	165.100.1.255
(9)	1 0 . 0 0	165.100.2.0	to	165.100.2.63
(10)	1 0 . 0 1	165.100.2.64	to	165.100.2.127
(11)	1 0 . 1 0	165.100.2.128	to	165.100.2.191
(12)	1 0 . 1 1	165.100.2.192	to	165.100.2.255
(13)	1 1 . 0 0	165.100.3.0	to	165.100.3.63
(14)	1 1 . 0 1	165.100.3.64	to	165.100.3.127
(15)	1 1 . 1 0	165.100.3.128	to	165.100.3.191
(16)	1 1 . 1 1	165.100.3.192	to	165.100.3.255
		Down to		
(1023)	1 1 1 1 1 1 1 1 . 1 0	165.100.255.128	to	165.100.255.191
(1024)	1 1 1 1 1 1 1 1 . 1 1	165.100.255.192	to	165.100.255.255

Usable hosts: 64 − 2 = 62

Custom subnet mask: 128 + 64 = 192

128 + 64 + 32 + 16 + 8 + 4 + 2 + 1 = 255

The binary value of the last bit borrowed is the range. In this problem the range is 64.

The first address in each subnet range is the subnet number.

The last address in each subnet range is the subnet broadcast address.

Subnetting

Problem 2

Number of needed subnets **1000**
Number of needed usable hosts **60**
Network Address **165.100.0.0**

Address class B

Default subnet mask 255 . 255 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 192

Total number of subnets 1,024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

What is the 15th subnet range? 165.100.3.128 to 165.100.3.191

What is the subnet number for the 6th subnet? 165 . 100 . 1 . 64

What is the subnet broadcast address for the 6th subnet? 165 . 100 . 1 . 127

What are the assignable addresses for the 9th subnet? 165.100.2.1 to 165.100.0.62

Show your work for Problem 1 in the space below.

Number of Subnets	256	128	64	32	16	8	4	2	Number of Hosts
	2	4	8	16	32	64	128	256	
	128	64	32	16	8	4	2	1	Binary values
192.10.10.0	0	0	0	0	0	0	0	0	
(1)	0	0	0	0	192.10.10.0	to	192.10.10.15		
(2)	0	0	0	1	192.10.10.16	to	192.10.10.31		
(3)	0	0	1	0	192.10.10.32	to	192.10.10.47		
(4)	0	0	1	1	192.10.10.48	to	192.10.10.63		
(5)	0	1	0	0	192.10.10.64	to	192.10.10.79		
(6)	0	1	0	1	192.10.10.80	to	192.10.10.95		
(7)	0	1	1	0	192.10.10.96	to	192.10.10.111		
(8)	0	1	1	1	192.10.10.112	to	192.10.10.127		
(9)	1	0	0	0	192.10.10.128	to	192.10.10.143		
(10)	1	0	0	1	192.10.10.144	to	192.10.10.159		
(11)	1	0	1	0	192.10.10.160	to	192.10.10.175		
(12)	1	0	1	1	192.10.10.176	to	192.10.10.191		
(13)	1	1	0	0	192.10.10.192	to	192.10.10.207		
(14)	1	1	0	1	192.10.10.208	to	192.10.10.223		
(15)	1	1	1	0	192.10.10.224	to	192.10.10.239		
(16)	1	1	1	1	192.10.10.240	to	192.10.10.255		

Custom subnet mask:
128
64
32
+16
240

Usable subnets: 16 − 2 = 14

Usable hosts: 16 − 2 = 14

The binary value of the last bit borrowed is the range. In this problem the range is 16.

The first address in each subnet range is the subnet number.

The last address in each subnet range is the subnet broadcast address.

Subnetting

Problem 1

Number of needed subnets **14**
Number of needed usable hosts **14**
Network Address **192.10.10.0**

Address class C

Default subnet mask 255 . 255 . 255 . 0

Custom subnet mask 255 . 255 . 255 . 240

Total number of subnets 16

Total number of host addresses 16

Number of usable addresses 14

Number of bits borrowed 4

What is the 4th subnet range? 192.10.10.48 to 192.10.10.63

What is the subnet number for the 8th subnet? 192 . 10 . 10 . 112

What is the subnet broadcast address for the 13th subnet? 192 . 10 . 10 . 207

What are the assignable addresses for the 9th subnet? 192.10.10.129 to 192.10.10.142

Subnetting

Problem 3

Hint: It is possible to borrow one bit to create two subnets.

Number of needed subnets **2**

Network Address **195.223.50.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.128

Total number of subnets 2

Total number of host addresses 128

Number of usable addresses 126

Number of bits borrowed 1

What is the 2nd subnet range? 195.223.50.128 to 195.223.50.255

What is the subnet number for the 2nd subnet? 195.223.50.128

What is the subnet broadcast address for the 1st subnet? 195.223.50.127

What are the assignable addresses for the 1st subnet? 195.223.50.1 to 195.223.50.126

Subnetting

Problem 5

Number of needed usable hosts **6**

Network Address **126.0.0.0**

Address class A

Default subnet mask 255.0.0.0

Custom subnet mask 255.255.255.248

Total number of subnets 2097152

Total number of host addresses 8

Number of usable addresses 6

Number of bits borrowed 21

What is the 2nd subnet range? 126.0.0.8 to 126.0.0.15

What is the subnet number for the 5th subnet? 126.0.0.32

What is the subnet broadcast address for the 7th subnet? 126.0.0.55

What are the assignable addresses for the 10th subnet? 126.0.0.73 to 126.0.0.78

Show your work for Problem 4 in the space below.

190.35 .

N	N	N	N	N	N	N	N	.
				8	4	2	1	

N	N	H	H	H	H	H	H
		32	16	8	4	2	1

1) 0 0 0 0 0 0 0 0 0 0 0 → .0.0 → .0.63
2) 0 0 0 1 → .0.64 → .0.127
3) 0 0 1 0 → .0.128 → .0.191
4) 0 0 1 1 → .0.192 → .0.255
5) 0 1 0 0 → .1.0 → .1.63
6) 0 1 0 1 → .1.64 → .1.127
7) 0 1 1 0 → .1.128 → .1.191
8) 0 1 1 1 → .1.192 → .1.255
9) 1 0 0 0 → .2.0 → .2.63
10) 1 0 0 1 → .2.64 → .2.127
11) 1 0 1 0 → .2.128 → .2.191
12) 1 0 1 1 → .2.192 → .2.255
13) 1 1 0 0 → .3.0 → .3.63
14) 1 1 0 1 → .3.64 → .3.127
15) 1 1 1 0 → .3.128 → .3.191
16) 1 1 1 1 → .3.192 → .3.255

Subnetting

Problem 4

Number of needed subnets **750**
Network Address **190.35.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.255.192

Total number of subnets 1024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

What is the 15th subnet range? 190.35.3.128 to 190.35.3.191

What is the subnet number for the 13th subnet? 190.35.3.0

What is the subnet broadcast address for the 10th subnet? 190.35.2.127

What are the assignable addresses for the 6th subnet? 190.35.1.65 to 190.35.1.126

Show your work for Problem 3 in the space below.

Number of Subnets	256	128	64	32	16	8	4	2	Number of Hosts
	- 2	4	8	16	32	64	128	256	
	128	64	32	16	8	4	2	1	Binary values
195.223.50.0		0	0	0	0	0	0	0	
	0	195.223.50.0 to 195.223.~~50.127~~ 50.127							
	1	195.223.50.128 to 195.223.50.255							

128	64	32	16	8	4	2	1
0	1	1	1	1	1	1	1
2	4	4	4	4	4	4	4

Show your work for Problem 5 in the space below.

0 0 0 0 → .0.0.0 - .0.0.7
0 0 0 1 → .0.0.8 - .0.0.15
0 0 1 0 → .0.0.16 - .0.0.23
0 0 1 1 → .0.0.24 - .0.0.31
0 1 0 0 → .0.0.32 - .0.0.39
0 1 0 1 → .0.0.40 - .0.0.47
0 1 1 0 → .0.0.48 - .0.0.55
0 1 1 1 → .0.0.64 - .0.0.71
1 0 0 0 → .0.0.72 - .0.0.79
1 0 0 1 → .0.0.80 - .0.0.87

Subnetting

Problem 9

Number of needed usable hosts **28**

Network Address **172.50.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.255.224

Total number of subnets 2048

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 11

What is the 2nd subnet range? 172.50.0.32 - 172.50.0.63

What is the subnet number for the 10th subnet? 172.50.1.32

What is the subnet broadcast address for the 4th subnet? 172.50.0.127

What are the assignable addresses for the 6th subnet? 172.50.0.161 + 0 172.50.0.190

Subnetting

Problem 8

Number of needed subnets **5**

Network Address **172.50.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.224.0

Total number of subnets 8

Total number of host addresses 8,192

Number of usable addresses 8,190

Number of bits borrowed 3

What is the 4th subnet range? 172.50.96.0 +0
172.50.127.255

What is the subnet number for the 5th subnet? 172.50.128.0

What is the subnet broadcast address for the 6th subnet? 172.50.191.255

What are the assignable addresses for the 3rd subnet? 172.50.64.1 +0
172.50.95.254

Subnetting

Problem 7

Network Address **10.0.0.0 /16**

Address class A

Default subnet mask 255.0.0.0

Custom subnet mask 255.255.0.0

Total number of subnets 256

Total number of host addresses 65,536

Number of usable addresses 65,534

Number of bits borrowed 8

What is the 11th subnet range? 10.10.0.0 - 10.10.255.255

What is the subnet number for the 6th subnet? 10.5.0.0

What is the subnet broadcast address for the 2nd subnet? 10.1.255.255

What are the assignable addresses for the 9th subnet? 10.8.0.1 - 10.8.255.254

Subnetting

Problem 6

Number of needed subnets **10**

Network Address **192.70.10.0**

Address class C

Default subnet mask 255 . 255 . 255 . 0

Custom subnet mask 255 . 255 . 255 . 240

Total number of subnets 16

Total number of host addresses 16

Number of usable addresses 14

Number of bits borrowed 4

What is the 9th subnet range? 192 . 70 . 10 . 128 to 192 . 70 . 10 . 143

What is the subnet number for the 4th subnet? 192 . 70 . 10 . 48

What is the subnet broadcast address for the 12th subnet? 192 . 70 . 10 . 191

What are the assignable addresses for the 10th subnet? 192 . 70 . 10 . 145 to 192 . 70 . 10 . 158

Subnetting

Problem 10

Number of needed subnets **45**
Network Address **220.100.100.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.252

Total number of subnets 64

Total number of host addresses 4

Number of usable addresses 2

Number of bits borrowed 6

What is the 5th subnet range? 220.100.100.16 to 220.100.100.19

What is the subnet number for the 4th subnet? 220.100.100.12

What is the subnet broadcast address for the 13th subnet? 220.100.100.51

What are the assignable addresses for the 12th subnet? 220.100.100.45 to 220.100.100.46

Subnetting

Problem 11

Number of needed usable hosts **8,000**
Network Address **135.70.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.224.0

Total number of subnets 8

Total number of host addresses 8192

Number of usable addresses 8190

Number of bits borrowed 3

What is the 6th subnet range? 135.70.160.0 to 135.70.191.255

What is the subnet number for the 7th subnet? 135.70.192.0

What is the subnet broadcast address for the 3rd subnet? 135.70.95.255

What are the assignable addresses for the 5th subnet? 135.70.128.1 to 135.70.159.254

Subnetting

Problem 15

Network Address **93.0.0.0 \19**

Address class A

Default subnet mask 255.0.0.0

Custom subnet mask 255.255.224.0

Total number of subnets 2048

Total number of host addresses 8192

Number of usable addresses 8190

Number of bits borrowed 11

What is the 15th subnet range? 93.1.192.0 to 93.1.223.255

What is the subnet number for the 9th subnet? 93.1.0.0

What is the subnet broadcast address for the 7th subnet? 93.0.223.255

What are the assignable addresses for the 12th subnet? 93.1.96.1 to 93.1.127.254

Subnetting

Problem 14

Number of needed usable hosts **16**

Network Address **200.10.10.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.240

Total number of subnets 8

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 4

What is the 7th subnet range? _____

What is the subnet number for the 5th subnet? _____

What is the subnet broadcast address for the 4th subnet? _____

What are the assignable addresses for the 6th subnet? _____

Subnetting

Problem 13

Network Address **165.200.0.0 /26**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.255.192

Total number of subnets 1024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

What is the 10th subnet range? 165.200.2.64 to 165.200.2.127

What is the subnet number for the 11th subnet? 165.200.2.128

What is the subnet broadcast address for the 1023rd subnet? 165.200.255.191

What are the assignable addresses for the 1022nd subnet? 165.200.255.65 to 165.200.255.126

Subnetting

Problem 12

Number of needed usable hosts **45**

Network Address **198.125.50.0**

Address class C

Default subnet mask 255.255.255.0

Custom subnet mask 255.255.255.192

Total number of subnets 4

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 2

What is the 2nd subnet range? 198.125.50.64 to 198.125.50.127

What is the subnet number for the 2nd subnet? 198.125.50.64

What is the subnet broadcast address for the 4th subnet? 198.125.50.255

What are the assignable addresses for the 3rd subnet? 198.125.50.129 to 198.125.50.190

Show your work for Problem 2 in the space below.

Number of Hosts –	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	. 256	128	64	32	16	8	4	2
Number of Subnets –	2	4	8	16	32	64	128	256.	512	1024	2048	4,096	8,192	16,384	32,768	65,536
Binary values –	128	64	32	16	8	4	2	1 .	128	64	32	16	8	4	2	1
135. 126 .	0	0	0	0	0	0	0	0 .	0	0	0	0	0	0	0	0

	1	.	128	64	32	Range start		Range end
(1)		.			0	135.126.0.0	to	135.126.0.31
(2)					1	135.126.0.32	to	135.126.0.63
(3)				1	0	135.126.0.64	to	135.126.0.95
(4)				1	1	135.126.0.96	to	135.126.0.127
(5)			1	0	0	135.126.0.128	to	135.126.0.159
(6)			1	0	1	135.126.0.160	to	135.126.0.191
(7)			1	1	0	135.126.0.192	to	135.126.0.223
(8)			1	1	1	135.126.0.224	to	135.126.0.255
(9)	1	.	0	0	0	135.126.1.0	to	135.126.1.31
(10)	1	.	0	0	1	135.126.1.32	to	135.126.1.63
(11)	1	.	0	1	0	135.126.1.64	to	135.126.1.95
(12)	1	.	0	1	1	135.126.1.96	to	135.126.1.127
(13)	1	.	1	0	0	135.126.1.128	to	135.126.1.159
(14)	1	.	1	0	1	135.126.1.160	to	135.126.1.191
(15)	1	.	1	1	0	135.126.1.192	to	135.126.1.223
(16)	1	.	1	1	1	135.1261.224	to	135.126.1.255

$$\begin{array}{r} 5 \\ \times .3 \\ \hline 1.5 \end{array}$$

(Round up to 2)

$$\begin{array}{r} 20 \\ \times .3 \\ \hline 6 \end{array}$$

Practical Subnetting 2

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 30% growth in all areas. Circle each subnet on the graphic and answer the questions below.

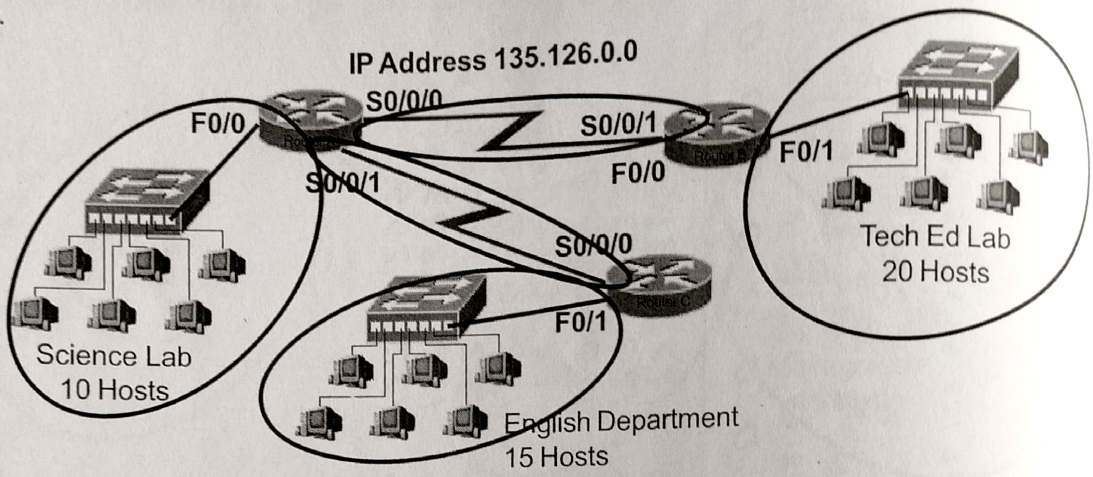

Address class	B
Custom subnet mask	255.255.255.224
Minimum number of subnets needed	5
Extra subnets required for 30% growth (Round up to the next whole number)	+ 2
Total number of subnets needed	= 7
Number of host addresses in the largest subnet group	20
Number of addresses needed for 30% growth in the largest subnet (Round up to the next whole number)	+ 6
Total number of address needed for the largest subnet	= 26

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Tech Ed	135.126.0.0 to 135.126.0.31
IP address range for English	135.126.0.32 to 135.126.0.63
IP address range for Science	135.126.0.64 to 135.126.0.95
IP address range for Router A to Router B serial connection	135.126.0.96 to 135.126.0.127
IP address range for Router A to Router B serial connection	135.126.0.128 to 135.126.0.159

Show your work for Practical Subnetting 1 in the space below.

Number of Hosts – 65,536 ---- 32,768 ---- 16,384 ---- 8,192 ---- 4,096 ---- 2,048 ---- 1,024 ---- 512 ---- . 256 128 64 32 16 8 4 2

Number of Subnets – 2 4 8 16 32 64 128 256. 512 1024 2048 4,096 8,192 16,384 32,768 65,536

Binary values – 128 64 32 16 8 4 2 1 . 128 64 32 16 8 4 2 1

172 . 16 . 0 0 0 0 0 0 0 0 . 0 0 0 0 0 0 0 0

(1)	0	172.16.0.0	to	172.16.31.255
(2)	1	172.16.32.0	to	172.16.63.255
(3)	1 0	172.16.64.0	to	172.16.95.255
(4)	1 1	172.16.96.0	to	172.16.127.255
(5)	1 0 0	172.16.128.0	to	172.16.159.255
(6)	1 0 1	172.16.160.0	to	172.16.191.255
(7)	1 1 0	172.16.192.0	to	172.16.223.255
(8)	1 1 1	172.16.224.0	to	172.16.255.255

4 × 1.0 = 4

60 × 1.0 = 60

Practical Subnetting 1

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 100% growth in both areas. Circle each subnet on the graphic and answer the questions below.

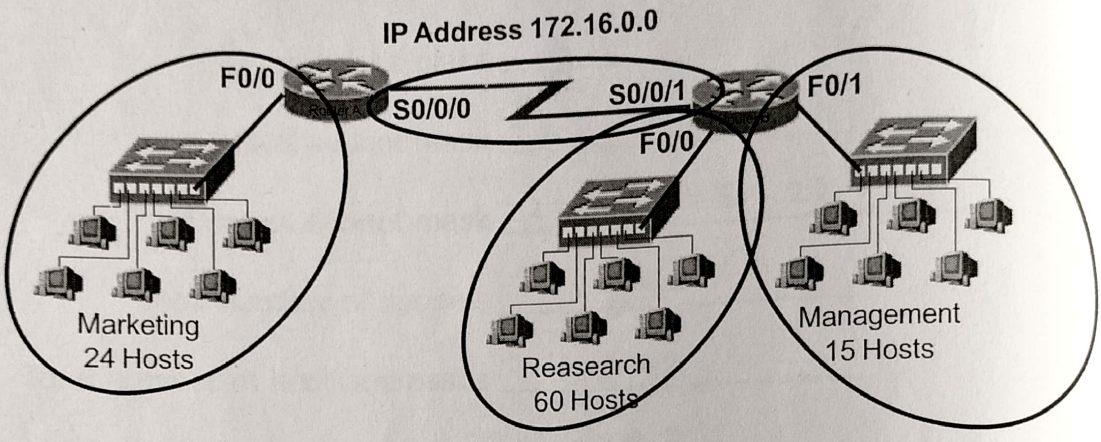

Address class	B
Custom subnet mask	255.255.224.0
Minimum number of subnets needed	4
Extra subnets required for 100% growth (Round up to the next whole number)	+ 4
Total number of subnets needed	= 8
Number of host addresses in the largest subnet group	60
Number of addresses needed for 100% growth in the largest subnet (Round up to the next whole number)	+ 60
Total number of address needed for the largest subnet	= 120

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Research	172.16.0.0 to 172.31.255
IP address range for Marketing	172.16.32.0 to 172.63.255
IP address range for Management	172.16.64.0 to 172.95.255
IP address range for Router A to Router B serial connection	172.16.96.0 to 172.127.255

Practical Subnetting 3

Based on the information in the graphic shown, design a classfull network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 25% growth in all areas. Circle each subnet on the graphic and answer the questions below.

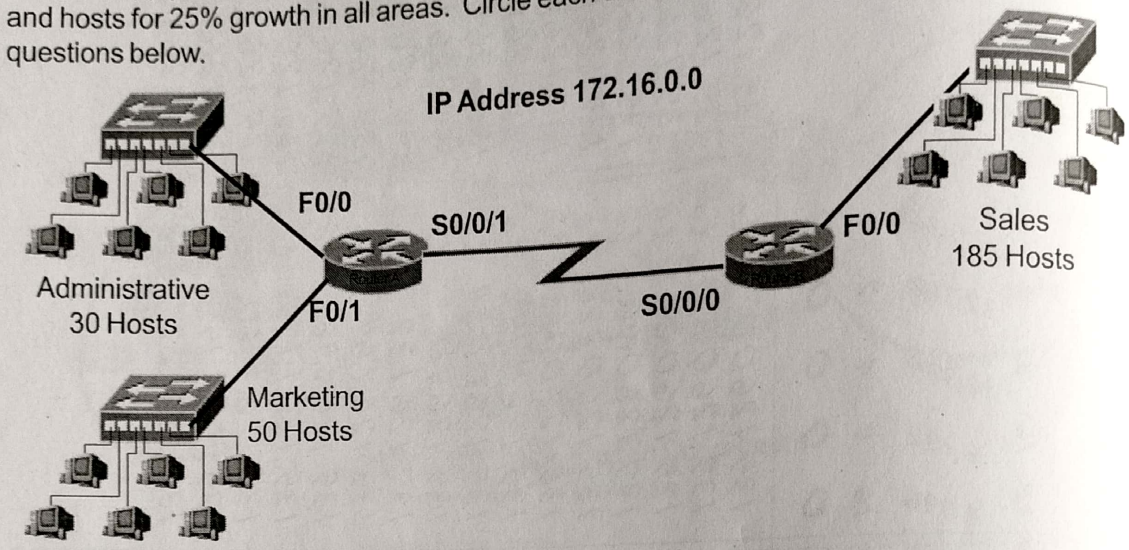

Address class B

Custom subnet mask 255.255.255.0

Minimum number of subnets needed 4

Extra subnets required for 25% growth + 1
(Round up to the next whole number)

Total number of subnets needed = 5

Number of host addresses in the largest subnet group 185

Number of addresses needed for 25% growth in the largest subnet + 47
(Round up to the next whole number)

Total number of address needed for the largest subnet = 232

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Sales 172.16.0.0 to 172.16.0.255

IP address range for Marketing 172.16.1.0 to 172.16.1.255

IP address range for Administrative 172.16.2.0 - 172.16.2.255

IP address range for Router A to Router B serial connection 172.16.3.0 to 172.16.3.255

Show your work for Problem 6 in the space below.

.0.0.0 → .15.255.255

.16.0.0 → .31.255.255

.32.0.0 → .47.255.255

.48.0.0 → .63.255.255

.64.0.0 → .79.255.255

.80.0.0 → .95.255.255

.96.0.0 → .111.255.255

.

.

.240.0.0 → .255.255.255

Practical Subnetting 6

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 20% growth in all areas. Circle each subnet on the graphic and answer the questions below.

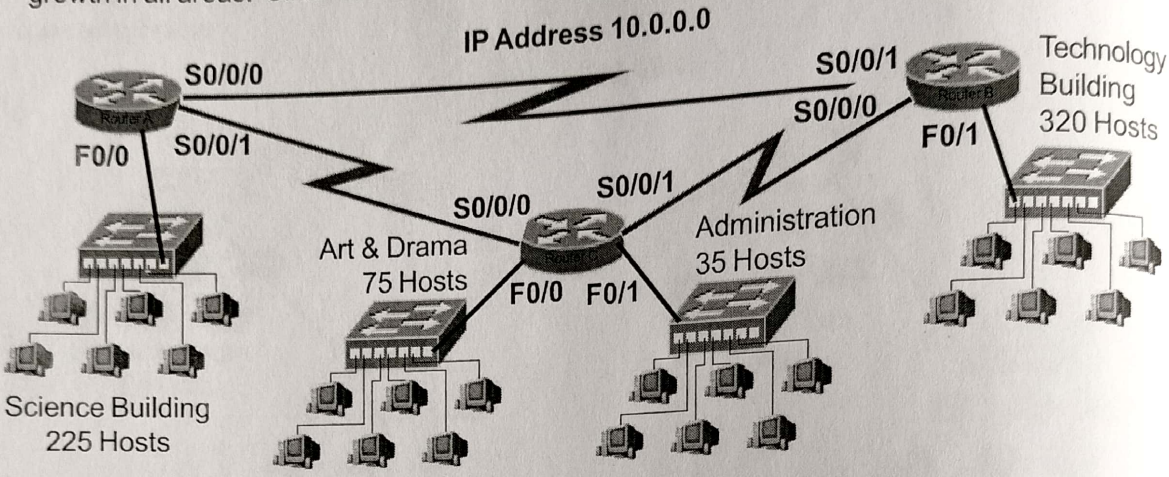

Address class A

Custom subnet mask 255.240.0.0

Minimum number of subnets needed 7

Extra subnets required for 20% growth (Round up to the next whole number) + 2

Total number of subnets needed = 9

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Technology 10.0.0.0 - 10.15.255.255

IP address range for Science 10.16.0.0 - 10.31.255.255

IP address range for Arts & Drama 10.32.0.0 - 10.47.255.255

IP Address range Administration 10.48.0.0 to 10.63.255.255

IP address range for Router A to Router B serial connection 10.64.0.0 - 10.79.255.255

IP address range for Router A to Router C serial connection 10.80.0.0 - 10.95.255.255

IP address range for Router B to Router C serial connection 10.96.0.0 - 10.111.255.255

Practical Subnetting 5

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 100% growth in all areas. Circle each subnet on the graphic and answer the questions below.

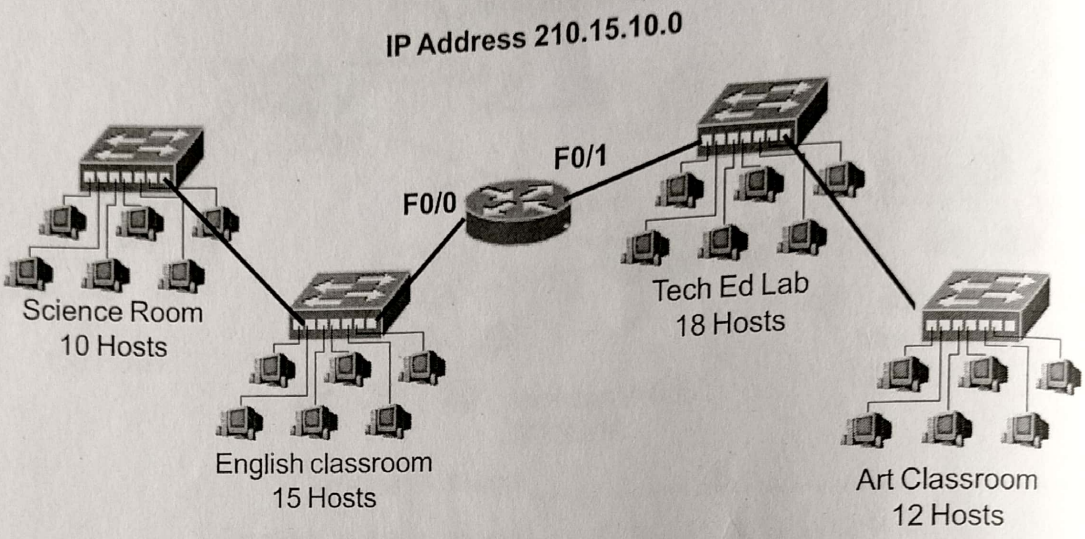

Address class	C
Custom subnet mask	255 . 255 . 255 . 192
Minimum number of subnets needed	2
Extra subnets required for 100% growth (Round up to the next whole number)	+ 2
Total number of subnets needed	= 4
Number of host addresses in the largest subnet group	30
Number of addresses needed for 100% growth in the largest subnet (Round up to the next whole number)	+ 30
Total number of address needed for the largest subnet	= 60

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Router F0/0 Port	210.15.10.0 to 210.15.10.63
IP address range for Router F0/1 Port	210.15.10.64 to 210.15.10.127

Practical Subnetting 4

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 70% growth in all areas. Circle each subnet on the graphic and answer the questions below.

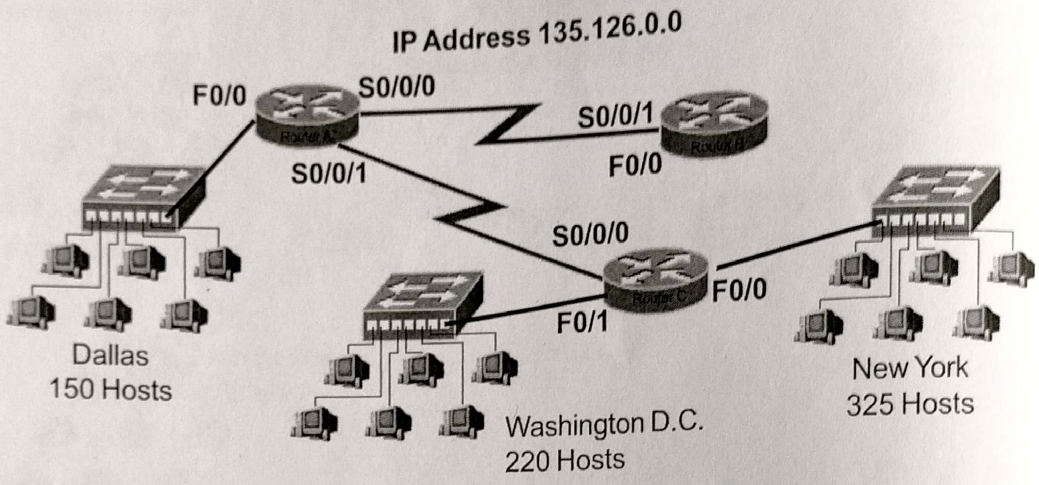

Address class B

Custom subnet mask 255.255.240.0

Minimum number of subnets needed 5

Extra subnets required for 70% growth (Round up to the next whole number) + 4

Total number of subnets needed = 9

Number of host addresses in the largest subnet group 325

Number of addresses needed for 70% growth in the largest subnet (Round up to the next whole number) + 228

Total number of address needed for the largest subnet = 553

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for New York 135.126.0.0 - 135.126.15.255

IP address range for Washington D. C. 135.126.16.0 - 135.126.31.255

IP address range for Dallas 135.126.32.0 - 135.126.47.255

IP address range for Router A to Router B serial connection 135.126.48.0 - 135.126.63.255

IP address range for Router A to Router C serial connection 135.126.64.0 - 135.126.79.255

Practical Subnetting 7

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 125% growth in all areas. Circle each subnet on the graphic and answer the questions below.

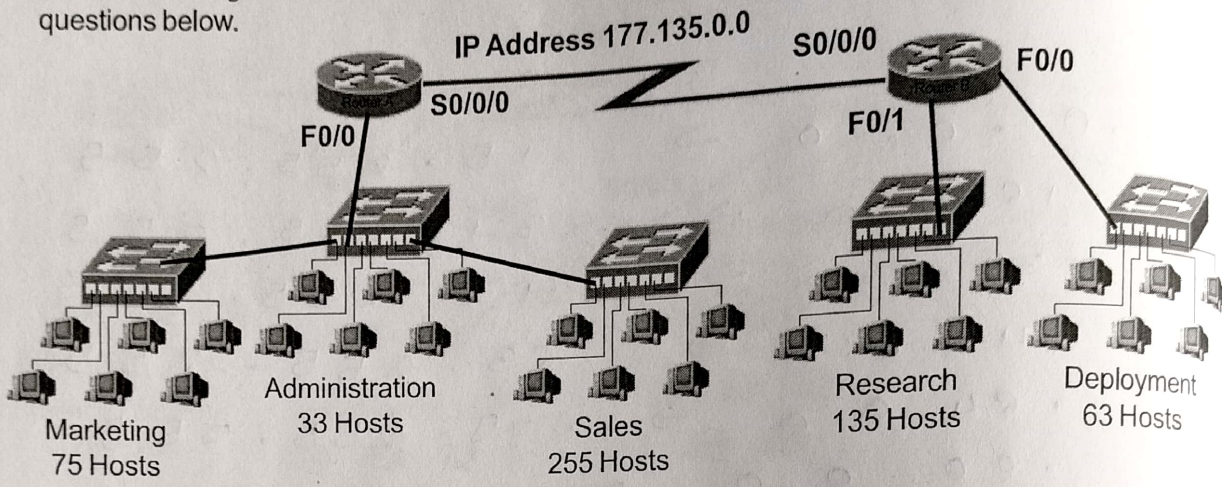

Address class	B
Custom subnet mask	255.255.252.0
Minimum number of subnets needed	4
Extra subnets required for 125% growth (Round up to the next whole number)	+ 5
Total number of subnets needed	= 9
Number of host addresses in the largest subnet group	363
Number of addresses needed for 125% growth in the largest subnet (Round up to the next whole number)	+ 454
Total number of address needed for the largest subnet	= 817

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Router A Port F0/0	.0.0 - .3.255
IP address range for Research	.4.0 - .7.255
IP address range for Deployment	.8.0 - .11.255
IP address range for Router A to Router B serial connection	.12.0 - .15.255

Practical Subnetting 9

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 15% growth in all areas. Circle each subnet on the graphic and answer the questions below.

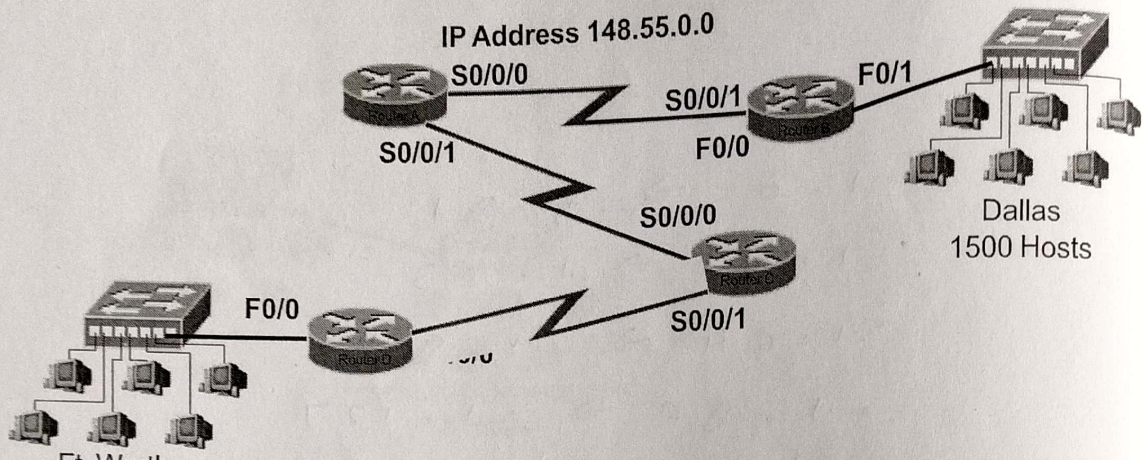

Address class B

Custom subnet mask 255.255.240.0

Minimum number of subnets needed 5

Extra subnets required for 15% growth (Round up to the next whole number) + 1

Total number of subnets needed = 6

Number of host addresses in the largest subnet group 2300

Number of addresses needed for 15% growth in the largest subnet (Round up to the next whole number) + 345

Total number of address needed for the largest subnet = 2645

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Ft. Worth .0.0 - .15.255

IP address range for Dallas .16.0 - .31.255

IP address range for Router A to Router B serial connection .32.0 - .47.255

IP address range for Router A to Router C serial connection .48.0 - .63.255

IP address range for Router C to Router D serial connection .64.0 - .79.255

Show your work for Problem 8 in the space below.

- 1.0 → .1.31
- 1.32 → .1.63
- 1.64 → .1.95
- 1.96 → .1.127
- 1.128 → .1.159
- 1.160 → .1.191
- 1.192 → .1.223
- 1.224 → .1.255

Practical Subnetting 8

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number subnets**, and allow enough extra subnets and hosts for 85% growth in all areas. Circle each subnet on the graphic and answer the questions below.

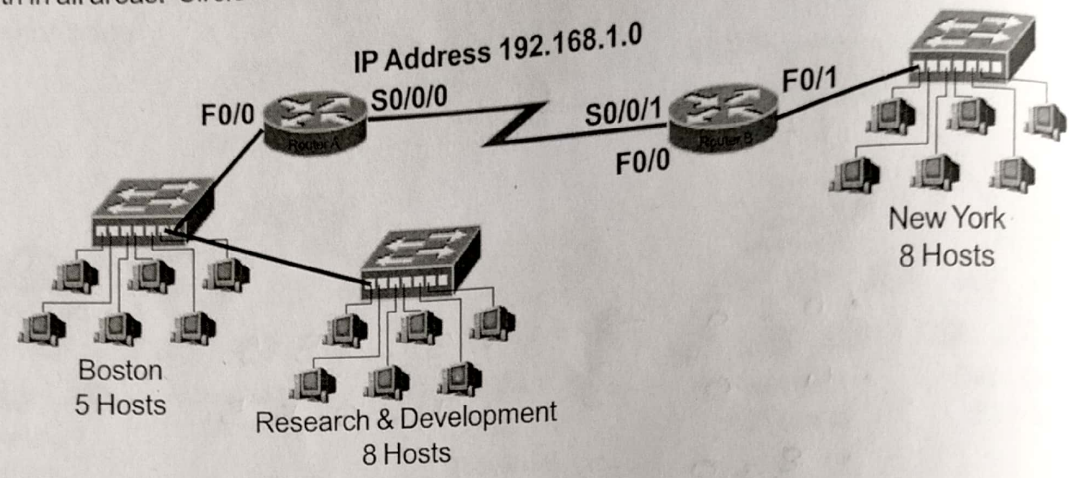

Address class	C
Custom subnet mask	255.255.255.224
Minimum number of subnets needed	3
Extra subnets required for 85% growth (Round up to the next whole number)	+ 3
Total number of subnets needed	= 6
Number of host addresses in the largest subnet group	13
Number of addresses needed for 85% growth in the largest subnet (Round up to the next whole number)	+ 12
Total number of address needed for the largest subnet	= 25

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Router A F0/0	.0 - .31
IP address range for New York	.32 - .63
IP address range for Router A to Router B serial connection	.64 - .95

Show your work for Problem 7 in the space below.

$0.0 \rightarrow 3.255$

$4.0 \rightarrow 7.255$

$8.0 \rightarrow 11.255$

$12.0 \rightarrow 15.255$

$16.0 \rightarrow 19.255$

$\vdots$

$252.0 \rightarrow 255.255$

Valid and Non-Valid IP Addresses

Using the material in this workbook identify which of the addresses below are correct and usable. If they are not usable addresses explain why.

IP Address: 0.230.190.192
Subnet Mask: 255.0.0.0
Reference Page Inside Front Cover

The network ID cannot be 0.

IP Address: 192.10.10.1
Subnet Mask: 255.255.255.0
Reference Pages 28-29

OK

IP Address: 245.150.190.10
Subnet Mask: 255.255.255.0
Reference Page Inside Front Cover

245 is reserved for experimental use

IP Address: 135.70.191.255
Subnet Mask: 255.255.254.0
Reference Pages 48-49

This is broadcast address of the network

IP Address: 127.100.100.10
Subnet Mask: 255.0.0.0
Reference Pages Inside Front Cover

127 is reserved for loopback testing

IP Address: 93.0.128.1
Subnet Mask: 255.255.224.0
Reference Pages 56-57

OK

IP Address: 200.10.10.128
Subnet Mask: 255.255.255.224
Reference Pages 54-55

This is subnet address of the 3rd subnet

IP Address: 165.100.255.189
Subnet Mask: 255.255.255.192
Reference Pages 30-31

OK

IP Address: 190.35.0.10
Subnet Mask: 255.255.255.192
Reference Pages 34-35

This address is valid

IP Address: 218.35.50.195
Subnet Mask: 255.255.0.0
Reference Page Inside Front Cover

This has a class B subnet mask

IP Address: 200.10.10.175 /22
Reference Pages 54-55 and/or Inside Front Cover

A class C address must use a minimum 24-bit

IP Address: 135.70.255.255
Subnet Mask: 255.255.224.0
Reference Pages 48-49

This is a broadcast address

Show your work for Problem 10 in the space below.

0.0 → 1.255

2.0 → 3.255

4.0 → 5.255

6.0 → 7.255

8.0 → 9.255

10.0 → 11.255

⋮

254.0 → 255.255

Practical Subnetting 10

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 110% growth in all areas. Circle each subnet on the graphic and answer the questions below.

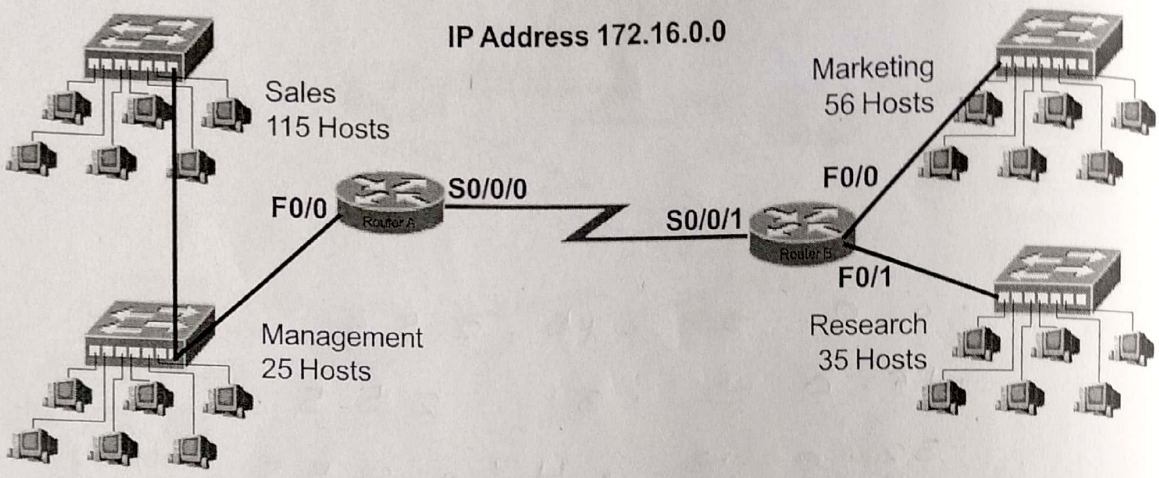

Address class	B
Custom subnet mask	255 . 255 . 255 . 2[illegible] 0
Minimum number of subnets needed	4
Extra subnets required for 110% growth (Round up to the next whole number)	+ 5
Total number of subnets needed	= 9
Number of host addresses in the largest subnet group	140
Number of addresses needed for 110% growth in the largest subnet (Round up to the next whole number)	+ 154
Total number of address needed for the largest subnet	= 294

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Sales/Managemnt	.0.0 - .[illegible].255
IP address range for Marketing	.[illegible].0 - .[illegible].255
IP address range for Research	.[illegible].0 - .[illegible].255
IP address range for Router A to Router B serial connection	.[illegible].0 - .[illegible].255

Show your work for Problem 9 in the space below.

.0.0 → .15.255
.16.0 → .31.255
.32.0 → .47.255
.48.0 → .63.255
.64.0 → .79.255
.80.0 → .95.255

.240.0 → .255.255

IP Address Breakdown

/24 8+8+8 255.255.255.0 256 Hosts	/25 8+8+8+1 255.255.255.128 128 Hosts	/26 8+8+8+2 255.255.255.192 64 Hosts	/27 8+8+8+3 255.255.255.224 32 Hosts	/28 8+8+8+4 255.255.255.240 16 Hosts	/29 8+8+8+5 255.255.255.248 8 Hosts	/30 8+8+8+6 255.255.255.252 4 Hosts
0-255	0-127	0-63	0-31	0-15	0-7	0-3
						4-7
					8-15	8-11
						12-15
				16-31	16-23	16-19
						20-23
					24-31	24-27
						28-31
			32-63	32-47	32-39	32-35
						36-39
					40-47	40-43
						44-47
				48-63	48-55	48-51
						52-55
					56-63	56-59
						60-63
		64-127	64-95	64-79	64-71	64-67
						68-71
					72-79	72-75
						76-79
				80-95	80-87	80-83
						84-87
					88-95	88-91
						92-95
			96-127	96-111	96-103	96-99
						100-103
					104-111	104-107
						108-111
				112-127	112-119	112-115
						116-119
					120-127	120-123
						124-127
	128-255	128-191	128-159	128-143	128-135	128-131
						132-135
					136-143	136-139
						140-143
				144-159	144-151	144-147
						148-151
					152-159	152-155
						156-159
			160-191	160-175	16-167	160-163
						164-167
					168-175	168-171
						172-175
				176-191	176-183	176-179
						180-183
					184-191	184-187
						188-191
		192-255	192-223	192-207	192-199	192-195
						196-199
					200-207	200-203
						204-207
				208-223	208-215	208-211
						212-215
					216-223	216-219
						220-223
			224-255	224-239	224-231	224-227
						228-231
					232-239	232-235
						236-239
				240-255	240-247	240-243
						244-247
					248-255	248-251
						252-255

Visualizing Subnets Using The Box Method

The box method is the simplest way to visualize the breakdown of subnets and addresses into smaller sizes.

Start with a square. The whole square is a single subnet comprised of 256 addresses.

/24
255.255.255.0
256 Hosts
1 Subnet

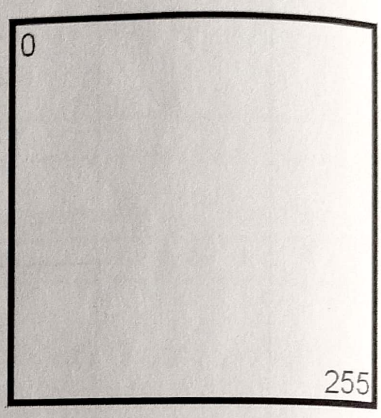

Split the box in half and you get two subnets with 128 addresses,

/25
255.255.255.128
128 Hosts
2 Subnets

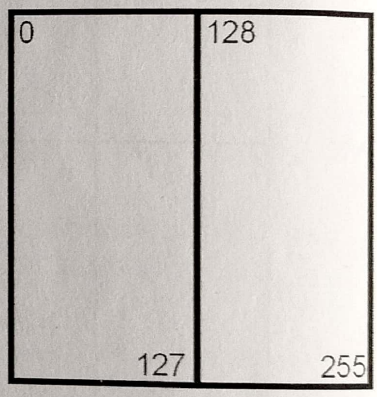

Divide the box into quarters and you get four subnets with 64 addresses,

/26
255.255.255.192
64 Hosts
4 Subnets

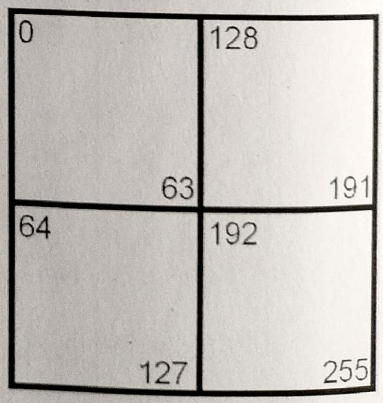

Split each individual square and you get eight subnets with 32 addresses,

/27
255.255.255.224
32 Hosts
8 Subnets

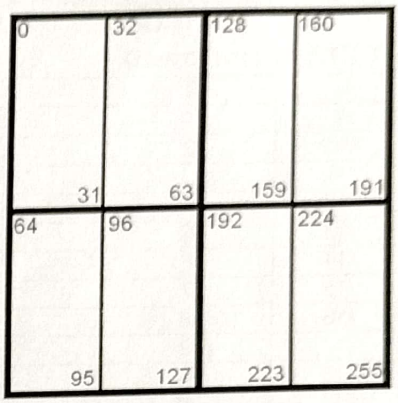

Split the boxes in half again and you get sixteen subnets with sixteen addresses,

/28
255.255.255.240
16 Hosts
16 Subnets

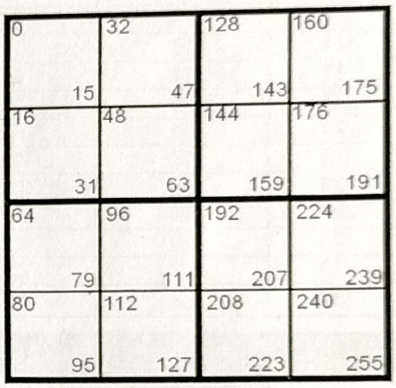

The next split gives you thirty two subnets with eight addresses,

/29
255.255.255.248
8 Hosts
32 Subnets

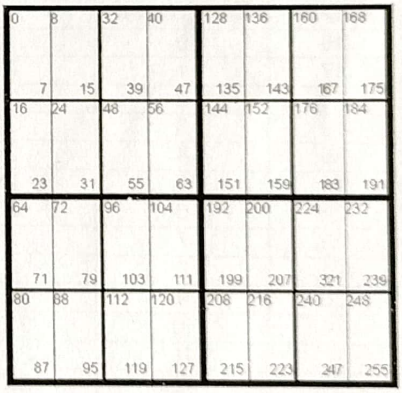

The last split gives sixty four subnets with four addresses each,

/30
255.255.255.252
4 Hosts
64 Subnets

Class A Addressing Guide

CIDR	# of Bits Borrowed	Subnet Mask	Total # of Subnets	Total # of Hosts	Usable # of Hosts
/8	0	255.0.0.0	1	16,777,216	16,777,214
/9	1	255.128.0.0	2	8,388,608	8,388,606
/10	2	255.192.0.0	4	4,194,304	4,194,302
/11	3	255.224.0.0	8	2,097,152	2,097,150
/12	4	255.240.0.0	16	1,048,576	1,048,574
/13	5	255.248.0.0	32	524,288	524,286
/14	6	255.252.0.0	64	262,144	262,142
/15	7	255.254.0.0	128	131,072	131,070
/16	8	255.255.0.0	256	65,536	65,534
/17	9	255.255.128.0	512	32,768	32,766
/18	10	255.255.192.0	1,024	16,384	16,382
/19	11	255.255.224.0	2,048	8,192	8,190
/20	12	255.255.240.0	4,096	4,096	4,094
/21	13	255.255.248.0	8,192	2,048	2,046
/22	14	255.255.252.0	16,384	1,024	1,022
/23	15	255.255.254.0	32,768	512	510
/24	16	255.255.255.0	65,536	256	254
/25	17	255.255.255.128	131,072	128	126
/26	18	255.255.255.192	262,144	64	62
/27	19	255.255.255.224	524,288	32	30
/28	20	255.255.255.240	1,048,576	16	14
/29	21	255.255.255.248	2,097,152	8	6
/30	22	255.255.255.252	4,194,304	4	2

Class B Addressing Guide

CIDR	# of Bits Borrowed	Subnet Mask	Total # of Subnets	Total # of Hosts	Usable # of Hosts
/16	0	255.255.0.0	1	65,536	65,534
/17	1	255.255.128.0	2	32,768	32,766
/18	2	255.255.192.0	4	16,384	16,382
/19	3	255.255.224.0	8	8,192	8,190
/20	4	255.255.240.0	16	4,096	4,094
/21	5	255.255.248.0	32	2,048	2,046
/22	6	255.255.252.0	64	1,024	1,022
/23	7	255.255.254.0	128	512	510
/24	8	255.255.255.0	256	256	254
/25	9	255.255.255.128	512	128	126
/26	10	255.255.255.192	1,024	64	62
/27	11	255.255.255.224	2,048	32	30
/28	12	255.255.255.240	4,096	16	14
/29	13	255.255.255.248	8,192	8	6
/30	14	255.255.255.252	16,384	4	2

Class C Addressing Guide

CIDR	# of Bits Borrowed	Subnet Mask	Total # of Subnets	Total # of Hosts	Usable # of Hosts
/24	0	255.255.255.0	1	256	254
/25	1	255.255.255.128	2	128	126
/26	2	255.255.255.192	4	64	62
/27	3	255.255.255.224	8	32	30
/28	4	255.255.255.240	16	16	14
/29	5	255.255.255.248	32	8	6
/30	6	255.255.255.252	64	4	2