

Introduction to Electronic Design Automation

Homework 4

Student: 吳亞倫
 ID: B13901011
 Department: 電機工程學系

1 Partition

Initial partition

$$A = \{a, b, c\}, \quad B = \{d, e, f\}$$

$$\text{Initial cut cost} = (3 + 3 + 2) + (2 + 4 + 1) + (0 + 2 + 2) = 19$$

Iteration 1

$$A = \{a, b, c\}, \quad B = \{d, e, f\}$$

$$\text{Current cut cost} = 19$$

Step 1

Current I , E , and D values:

Vertex	I	E	$D = E - I$	Locked
a	$2 + 1 = 3$	$3 + 3 + 2 = 8$	$8 - 3 = 5$	no
b	$2 + 0 = 2$	$2 + 4 + 1 = 7$	$7 - 2 = 5$	no
c	$1 + 0 = 1$	$0 + 2 + 2 = 4$	$4 - 1 = 3$	no
d	$1 + 0 = 1$	$3 + 2 + 0 = 5$	$5 - 1 = 4$	no
e	$1 + 1 = 2$	$3 + 4 + 2 = 9$	$9 - 2 = 7$	no
f	$0 + 1 = 1$	$2 + 1 + 2 = 5$	$5 - 1 = 4$	no

Candidate gains:

$$g_{ad} = D_a + D_d - 2c_{ad} = 5 + 4 - 2 \cdot 3 = 3$$

$$g_{ae} = D_a + D_e - 2c_{ae} = 5 + 7 - 2 \cdot 3 = 6$$

$$g_{af} = D_a + D_f - 2c_{af} = 5 + 4 - 2 \cdot 2 = 5$$

$$g_{bd} = D_b + D_d - 2c_{bd} = 5 + 4 - 2 \cdot 2 = 5$$

$$g_{be} = D_b + D_e - 2c_{be} = 5 + 7 - 2 \cdot 4 = 4$$

$$g_{bf} = D_b + D_f - 2c_{bf} = 5 + 4 - 2 \cdot 1 = 7$$

$$g_{cd} = D_c + D_d - 2c_{cd} = 3 + 4 - 2 \cdot 0 = 7$$

$$g_{ce} = D_c + D_e - 2c_{ce} = 3 + 7 - 2 \cdot 2 = 6$$

$$g_{cf} = D_c + D_f - 2c_{cf} = 3 + 4 - 2 \cdot 2 = 3$$

Therefore, the maximum gain is

$$\hat{g}_1 = g_{bf} = 7$$

Temporarily swap b and f , and lock them.

Step 2

Current I , E , and D values:

Vertex	I	E	$D = E - I$	Locked
a	$1 + 2 = 3$	$2 + 3 + 3 = 8$	$8 - 3 = 5$	no
b	$2 + 4 = 6$	$2 + 0 + 1 = 3$	$3 - 6 = -3$	yes
c	$1 + 2 = 3$	$0 + 0 + 2 = 2$	$2 - 3 = -1$	no
d	$2 + 1 = 3$	$3 + 0 + 0 = 3$	$3 - 3 = 0$	no
e	$4 + 1 = 5$	$3 + 2 + 1 = 6$	$6 - 5 = 1$	no
f	$2 + 2 = 4$	$1 + 0 + 1 = 2$	$2 - 4 = -2$	yes

Candidate gains:

$$g_{ad} = D_a + D_d - 2c_{ad} = 5 + 0 - 2 \cdot 3 = -1$$

$$g_{ae} = D_a + D_e - 2c_{ae} = 5 + 1 - 2 \cdot 3 = 0$$

$$g_{cd} = D_c + D_d - 2c_{cd} = -1 + 0 - 2 \cdot 0 = -1$$

$$g_{ce} = D_c + D_e - 2c_{ce} = -1 + 1 - 2 \cdot 2 = -4$$

Therefore, the maximum gain is

$$\hat{g}_2 = g_{ae} = 0$$

Temporarily swap a and e , and lock them.

Step 3

Current I , E , and D values:

Vertex	I	E	$D = E - I$	Locked
a	$2 + 3 = 5$	$1 + 3 + 2 = 6$	$6 - 5 = 1$	yes
b	$2 + 2 = 4$	$0 + 4 + 1 = 5$	$5 - 4 = 1$	yes
c	$2 + 2 = 4$	$1 + 0 + 0 = 1$	$1 - 4 = -3$	no
d	$3 + 2 = 5$	$0 + 1 + 0 = 1$	$1 - 5 = -4$	no
e	$2 + 1 = 3$	$3 + 4 + 1 = 8$	$8 - 3 = 5$	yes
f	$2 + 1 = 3$	$2 + 1 + 0 = 3$	$3 - 3 = 0$	yes

Candidate gains:

$$g_{cd} = D_c + D_d - 2c_{cd} = -3 + -4 - 2 \cdot 0 = -7$$

Therefore, the maximum gain is

$$\hat{g}_3 = g_{cd} = -7$$

Temporarily swap c and d , and lock them.

Summary of Iteration 1

$$\hat{g}_1 = g_{bf} = 7,$$

$$\hat{g}_2 = g_{ae} = 0,$$

$$\hat{g}_3 = g_{cd} = -7$$

The partial sums are:

$$G_1 = \sum_{j=1}^1 \hat{g}_j = 7,$$

$$G_2 = \sum_{j=1}^2 \hat{g}_j = 7,$$

$$G_3 = \sum_{j=1}^3 \hat{g}_j = 0$$

Thus,

$$\max_k G_k = 7 \quad \text{at} \quad k = 1$$

Since the largest partial sum is positive, apply the first 1 swap(s):

- Swap b and f .

After applying the selected swap(s),

$$A = \{a, c, f\}, \quad B = \{b, d, e\}$$

$$\text{New cut cost} = 12$$

Iteration 2**Step 1**

Current I , E , and D values:

Vertex	I	E	$D = E - I$	Locked
a	$1 + 2 = 3$	$2 + 3 + 3 = 8$	$8 - 3 = 5$	no
b	$2 + 4 = 6$	$2 + 0 + 1 = 3$	$3 - 6 = -3$	no
c	$1 + 2 = 3$	$0 + 0 + 2 = 2$	$2 - 3 = -1$	no
d	$2 + 1 = 3$	$3 + 0 + 0 = 3$	$3 - 3 = 0$	no
e	$4 + 1 = 5$	$3 + 2 + 1 = 6$	$6 - 5 = 1$	no
f	$2 + 2 = 4$	$1 + 0 + 1 = 2$	$2 - 4 = -2$	no

Candidate gains:

$$g_{ab} = D_a + D_b - 2c_{ab} = 5 + -3 - 2 \cdot 2 = -2$$

$$g_{ad} = D_a + D_d - 2c_{ad} = 5 + 0 - 2 \cdot 3 = -1$$

$$g_{ae} = D_a + D_e - 2c_{ae} = 5 + 1 - 2 \cdot 3 = 0$$

$$g_{cb} = D_c + D_b - 2c_{cb} = -1 + -3 - 2 \cdot 0 = -4$$

$$g_{cd} = D_c + D_d - 2c_{cd} = -1 + 0 - 2 \cdot 0 = -1$$

$$g_{ce} = D_c + D_e - 2c_{ce} = -1 + 1 - 2 \cdot 2 = -4$$

$$g_{fb} = D_f + D_b - 2c_{fb} = -2 + -3 - 2 \cdot 1 = -7$$

$$g_{fd} = D_f + D_d - 2c_{fd} = -2 + 0 - 2 \cdot 0 = -2$$

$$g_{fe} = D_f + D_e - 2c_{fe} = -2 + 1 - 2 \cdot 1 = -3$$

Therefore, the maximum gain is

$$\hat{g}_1 = g_{ae} = 0$$

Temporarily swap a and e , and lock them.

Step 2

Current I , E , and D values:

Vertex	I	E	$D = E - I$	Locked
a	$2 + 3 = 5$	$1 + 3 + 2 = 6$	$6 - 5 = 1$	yes
b	$2 + 2 = 4$	$0 + 4 + 1 = 5$	$5 - 4 = 1$	no
c	$2 + 2 = 4$	$1 + 0 + 0 = 1$	$1 - 4 = -3$	no
d	$3 + 2 = 5$	$0 + 1 + 0 = 1$	$1 - 5 = -4$	no
e	$2 + 1 = 3$	$3 + 4 + 1 = 8$	$8 - 3 = 5$	yes
f	$2 + 1 = 3$	$2 + 1 + 0 = 3$	$3 - 3 = 0$	no

Candidate gains:

$$g_{cb} = D_c + D_b - 2c_{cb} = -3 + 1 - 2 \cdot 0 = -2$$

$$g_{cd} = D_c + D_d - 2c_{cd} = -3 + -4 - 2 \cdot 0 = -7$$

$$g_{fb} = D_f + D_b - 2c_{fb} = 0 + 1 - 2 \cdot 1 = -1$$

$$g_{fd} = D_f + D_d - 2c_{fd} = 0 + -4 - 2 \cdot 0 = -4$$

Therefore, the maximum gain is

$$\hat{g}_2 = g_{fb} = -1$$

Temporarily swap f and b , and lock them.

Step 3

Current I , E , and D values:

Vertex	I	E	$D = E - I$	Locked
a	$3 + 2 = 5$	$2 + 1 + 3 = 6$	$6 - 5 = 1$	yes
b	$0 + 4 = 4$	$2 + 2 + 1 = 5$	$5 - 4 = 1$	yes
c	$0 + 2 = 2$	$1 + 0 + 2 = 3$	$3 - 2 = 1$	no
d	$3 + 0 = 3$	$2 + 0 + 1 = 3$	$3 - 3 = 0$	no
e	$4 + 2 = 6$	$3 + 1 + 1 = 5$	$5 - 6 = -1$	yes
f	$2 + 0 = 2$	$1 + 2 + 1 = 4$	$4 - 2 = 2$	yes

Candidate gains:

$$g_{cd} = D_c + D_d - 2c_{cd} = 1 + 0 - 2 \cdot 0 = 1$$

Therefore, the maximum gain is

$$\hat{g}_3 = g_{cd} = 1$$

Temporarily swap c and d , and lock them.

Summary of Iteration 2

$$\hat{g}_1 = g_{ae} = 0,$$

$$\hat{g}_2 = g_{fb} = -1,$$

$$\hat{g}_3 = g_{cd} = 1$$

The partial sums are:

$$G_1 = \sum_{j=1}^1 \hat{g}_j = 0,$$

$$G_2 = \sum_{j=1}^2 \hat{g}_j = -1,$$

$$G_3 = \sum_{j=1}^3 \hat{g}_j = 0$$

Thus,

$$\max_k G_k = 0 \quad \text{at} \quad k = 1$$

Since the largest partial sum is not positive, the algorithm stops.

Final result

$$A = \{a, c, f\}, \quad B = \{b, d, e\}$$

$$\text{Final cut cost} = 12$$

2 Floorplanning

2. (a)

The expression

$$E = 123VH4H56VV78HH.$$

is a valid Polish expression since:

- every operand j , $1 \leq j \leq 8$, appears exactly once in E
- for every prefix of E , $E_i = e_1 \dots e_i$, $1 \leq i \leq 2n - 1$, the number of operators is less than the number of operands.

	E_1	E_2	E_3	E_4	E_5	E_6	E_7	E_8	E_9	E_{10}	E_{11}	E_{12}	E_{13}	E_{14}	E_{15}
# of Operands	1	2	3	3	3	4	4	5	6	6	6	7	8	8	8
# of Operators	0	0	0	1	2	2	3	3	3	4	5	5	5	6	7

2. (b)

The Polish expression E is not normalized because E contains consecutive operators of the same type: VV and HH .

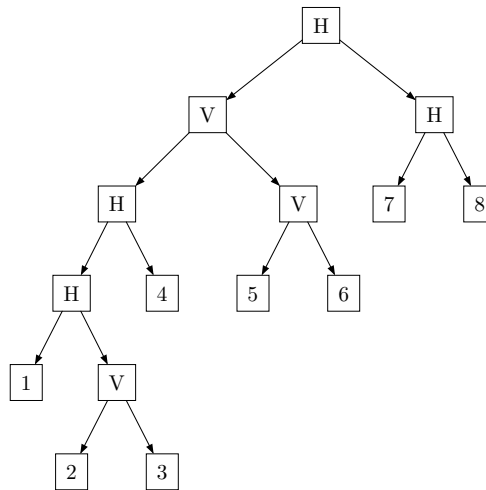


Figure 1: The slicing tree of the given floorplan.

By Figure 1, we can see the slicing tree represented by E . To change the expression into a normalized one, which also means to change the slicing tree into a skewed one, we can apply the following transformation:

- For every node, if its right child is the same type of operator X as itself, left-rotate the subtree rooted at that node.



Figure 2: Left rotation of a subtree with the same type of operator as its parent.

Applying the above transformation to the slicing tree in Figure 1, we can get the following slicing tree:

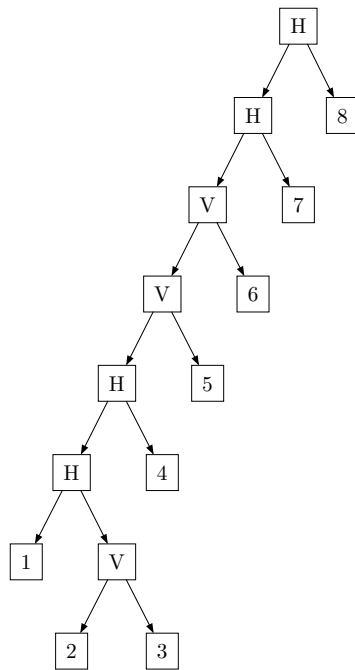


Figure 3: The slicing tree after applying left rotations to all consecutive same-type operator chains.

The normalized Polish expression corresponding to the above slicing tree is

$$E' = 123VH4H5V6V7H8H$$

which is a valid Polish expression and is normalized since it does not contain consecutive operators of the same type. Also, the normalized Polish expression is canonical in representing the floorplan.

2. (c)

2. (d)

3 Wire-length Estimation

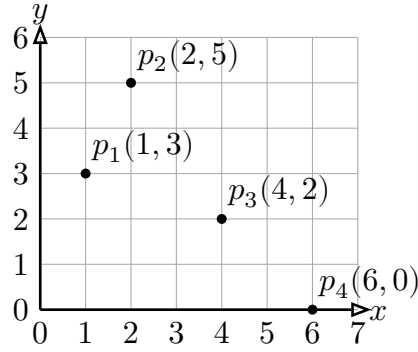


Figure 4: Pins of net N on a grid layout surface.

3. (a) Semi-perimeter Length

The semi-perimeter length is $(6 - 1) + (5 - 0) = 5 + 5 = 10$

3. (b) Complete Graph Length

$$\text{wirelength} \approx \frac{2}{n} \sum_{i,j \in \text{net}} \text{dist}(i,j) = \frac{2}{4}(3 + 4 + 8 + 5 + 9 + 4) = 16.5$$

3. (c) Minimum Spanning Tree Length

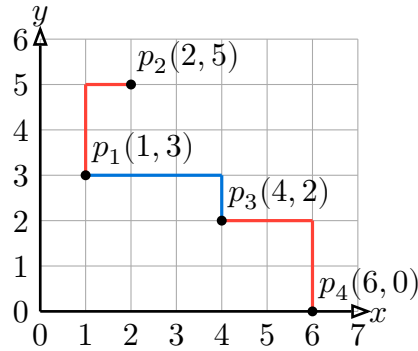


Figure 5: The Minimum Spanning Tree.

The length of the minimum spanning tree is $3 + 4 + 4 = 11$.

3. (d) Minimum Steiner Tree Length

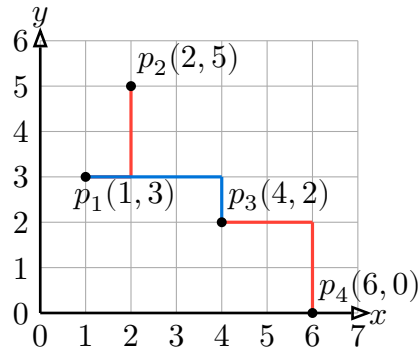


Figure 6: The Minimum Steiner Tree.

The length of the minimum Steiner tree is $2 + 4 + 4 = 10$.

4 Force-Directed Placement

4. (a)

$$\sum_{i \in \{B, C, D, E, F\}} w_{A,i} (x_A - x_i) = 0$$

$$\sum_{i \in \{B, C, D, E, F\}} w_{A,i} (y_A - y_i) = 0$$

$$1(x_A - 0) + 3(x_A - 2) + 1(x_A - 6) + 2(x_A - 8) + 3(x_A - 5) = 0$$

$$1(y_A - 0) + 3(y_A - 5) + 1(y_A - 9) + 2(y_A - 1) + 3(y_A - 4) = 0$$

$$10x_A - 43 = 0 \Rightarrow x_A = 4.3$$

$$10y_A - 38 = 0 \Rightarrow y_A = 3.8$$

Round (x_A, y_A) to the nearest integer grid point, we get the location of A as $(4, 4)$.

4. (b)

The objective function that we want to minimize is the total wire length:

$$\begin{aligned} L &= \sum_{i \in \{B, C, D, E, F\}} w_{A,i} (|x_A - x_i| + |y_A - y_i|) \\ &= 1(|x_A - 0| + |y_A - 0|) + 3(|x_A - 2| + |y_A - 5|) + 1(|x_A - 6| + |y_A - 9|) \\ &\quad + 2(|x_A - 8| + |y_A - 1|) + 3(|x_A - 5| + |y_A - 4|) \end{aligned}$$

By using the following python script to enumerate all possible locations of A on the grid that does not overlap with existing points and calculate the corresponding total wire length, we can find the optimal location of A that minimizes the total wire length.

python

```
1 w = [1, 3, 1, 2, 3]
2 x = [0, 2, 6, 8, 5]
3 y = [0, 5, 9, 1, 4]
4
5 cost = 999999999
6 best_x, best_y = 0, 0
7
8 for i in range(10):
9     for j in range(10):
10         c = 0
11         if (i, j) in zip(x, y):
12             continue
13         for k in range(5):
14             c += w[k] * (abs(x[k] - i) + abs(y[k] - j))
15         if c < cost:
16             cost = c
17             best_x, best_y = i, j
18
19 print("Best location: ({}, {}) with cost {}".format(best_x, best_y, cost))
20
```

The result shows that the optimal location of A is $(4, 4)$, with cost at 41, which is the same as the result obtained by the force-directed placement method in part (a).

5 Maze Routing

5. (a)

9	10	11	12	13					
8	9	10	11	12					
7			12	13			T		
6			13						
5					U				
4					13	12	11		13
3							10		12
2							9	10	11
1	S			5	6	7	8	9	10
2	1	2	3	4	5	6	7	8	9

Figure 7: Finding the shortest path between S and U by Lee's approach. The numbers in the grid represent the distance from S. The pink path is the retraced path from U to S.

Lee's propagation labels the reachable grids by their distances from S , as shown in the figure. Retracing from U along adjacent grids with decreasing labels gives the highlighted path.

Hence, the shortest path length from S to U is 14.

5. (b)

3	1	2	3	1	2	3			
2	3	1	2	3		1			
1			3	1		2	T ₍₃₎		
3			1	2			2	1	3
2			2		U				2
1				2	1	3	2		1
3							1		3
2							3	1	2
1	S			2	3	1	2	3	1
2	1	2	3	1	2	3	1	2	3

(a) Way 1

1	1	2	2	1	1	2			
2	1	1	2	2		2			
2			2	1		1	T		
1			1	1			1	2	2
1			1		U				1
2				1	1	2	2		1
2							1		2
1							1	1	2
1	S			1	1	2	2	1	1
2	1	1	2	2	1	1	2	2	1

(b) Way 2

Figure 8: Find a shortest path between S and T by Akers's approach

Figure 8 is the grid after using the Akers's approach to find the shortest path between S and T . The highlighted path in each subfigure is the path found by the algorithm. Both paths are shortest paths with length 18.

In Figure 8a, the grid containing T is labeled 3. Therefore, during retracing, we first move to an adjacent grid labeled 2, then to an adjacent grid labeled 1, then 3, 2, 1, and so on, until reaching S .

On the other hand, in Figure 8b, the grid containing T is labeled as the second 1. Therefore, during retracing, we first move to an adjacent grid labeled 1, then follow the reverse label order 2, 2, 1, 1, 2, 2, ... until reaching S .

For both Way 1 and Way 2, the retraced path has length 18. Hence, both paths are shortest paths from S to T .

5. (c)

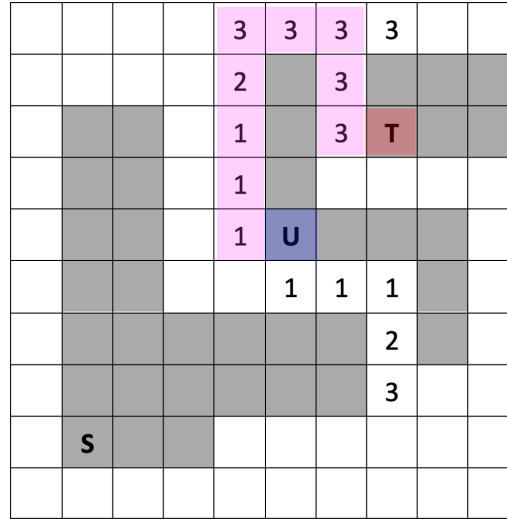


Figure 9: Finding the shortest path between U to T by Hadlock's approach. The number labeled in each grid is the detour number.

Figure 9 shows the result of Hadlock's approach for finding a shortest path from U to T . In the propagation step, U is used as the source. For each expansion, moving to a grid closer to T does not increase the detour number, while moving to a grid farther from T increases the detour number by 1. The grids are expanded in nondecreasing order of detour number until T is reached.

For retracing, we start from T and move backward to U . At each step, we choose an adjacent labeled grid that could be the predecessor under Hadlock's propagation rule. More specifically, if the backward move goes farther from T , the detour number should stay the same; if the backward move goes closer to T , the detour number should decrease by 1.

In Figure 9, the retraced path from T first goes to the adjacent grid labeled 3 on its left. Then it follows the sequence of detour numbers

$$3, 3, 3, 3, 3, 2, 1, 1, 1$$

and finally reaches U .

Equivalently, the path from U to T is: go left once, go up four times, go right twice, go down twice, and go right once. Therefore, the path length is 10.

5. (d)

The minimum distances from S to U is 14, from S to T is 18, and from U to T is 10. Therefore, in the minimum spanning tree, we choose the edges $S - U$ and $U - T$, and do not

choose the edge $S - T$. The total length of the minimum spanning tree is $14 + 10 = 24$. The result is shown in Figure 10.

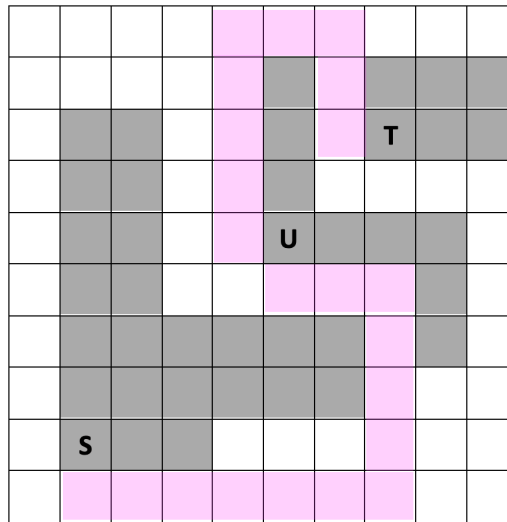


Figure 10: The minimum spanning tree connecting S, U, and T. The total length of the tree is 24.

5. (e)

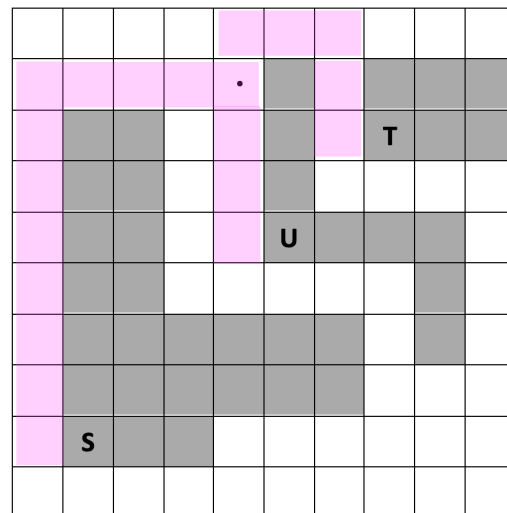


Figure 11: The Steiner tree connecting S, U, and T.

Figure 11 shows a rectilinear Steiner tree connecting S , U , and T . The black dot is chosen as the Steiner point P .

The tree consists of three branches from P to the three terminals. From P to S , the path length is $4 + 7 + 1 = 12$. From P to U , the path length is $3 + 1 = 4$. From P to T , the path length is $1 + 2 + 2 + 1 = 6$.

Therefore, the total net length is

$$12 + 4 + 6 = 22$$

.

6 Channel Routing

7 Testing