



ALEXANDRIA UNIVERSITY
FACULTY OF ENGINEERING
ELECTRICAL ENGINEERING DEPARTMENT

Microgrid Control Systems

Grid-Forming Inverter System: Droop Control and Power Management

Prepared by:

Abd El-Rhman Muhammad Saad Muhammad

ID: 19017058

Simulink Model Link:

[Click here to access the Simulink Model on GitHub](#)

Date: May 2026

Abstract

This report presents the comprehensive design, mathematical modeling, and MATLAB/Simulink simulation of a Grid-Forming Voltage Source Inverter (GFM-VSI). Unlike traditional grid-following inverters that inject current into a stiff grid, grid-forming inverters act as controlled AC voltage sources that establish the local grid voltage and frequency. The implemented system employs a Droop Control strategy ($P-\omega$ and $Q-V$) to autonomously share active and reactive power without relying on external communication. Furthermore, a cascaded multi-loop control architecture operating in the synchronous reference frame ($dq0$) is implemented to track the generated voltage reference. In the simulation, the inverter forms a stable AC voltage and its mean active power settles at 20 kW, equal to the reference P^* , within about one second.

Contents

1	System Specifications and Architecture	3
2	Advanced Control Strategy	4
2.1	Power Calculation and Droop Control	4
2.2	Cascaded Voltage and Current Loops	5
2.2.1	Inner Current Loop and Decoupling	5
2.2.2	Outer Voltage Loop	5
3	Simulation Results and Analysis	6
3.1	Power Tracking and Droop Response	6
3.2	Voltage Quality and Inverter Waveforms	7
4	Conclusion	8

1 System Specifications and Architecture

The simulated system comprises a Two-Level Voltage Source Inverter powered by a stiff 800V DC source. The inverter interfaces with the 400V (line-to-line RMS), 50Hz AC grid through a third-order LCL filter, which provides high harmonic attenuation for the 5 kHz switching frequency components.

The system architecture is divided into three main sub-systems: (1) Power and Droop Control for reference generation, (2) Inner Control Loops for voltage/current tracking, and (3) Signal Transformation for coordinate mapping. Table 1 summarizes the core system parameters. In the model, the inverter is connected through the LCL filter to a three-phase source (400 V, 50 Hz) with a source impedance of $0.893 \Omega + 16.58 \text{ mH}$.

Table 1: Grid-Forming Inverter System Parameters

Parameter	Value
Nominal AC Grid Voltage (V_{LL})	400 V (rms)
Peak Phase Voltage Reference (V^*)	326.7 V
Nominal System Frequency (f^*)	50 Hz
Nominal Angular Frequency (ω^*)	100π rad/s
DC Link Voltage (V_{DC})	800 V
Active Power Reference (P^*)	20 kW
Frequency Droop Coefficient (m_p)	5×10^{-5}
Voltage Droop Coefficient (n_q)	5×10^{-6}
LCL Inverter-Side Inductor	3 mH
LCL Filter Capacitor	220 μF
LCL Grid-Side Branch	$0.2 \Omega + 1 \text{ mH}$
Switching Frequency	5 kHz

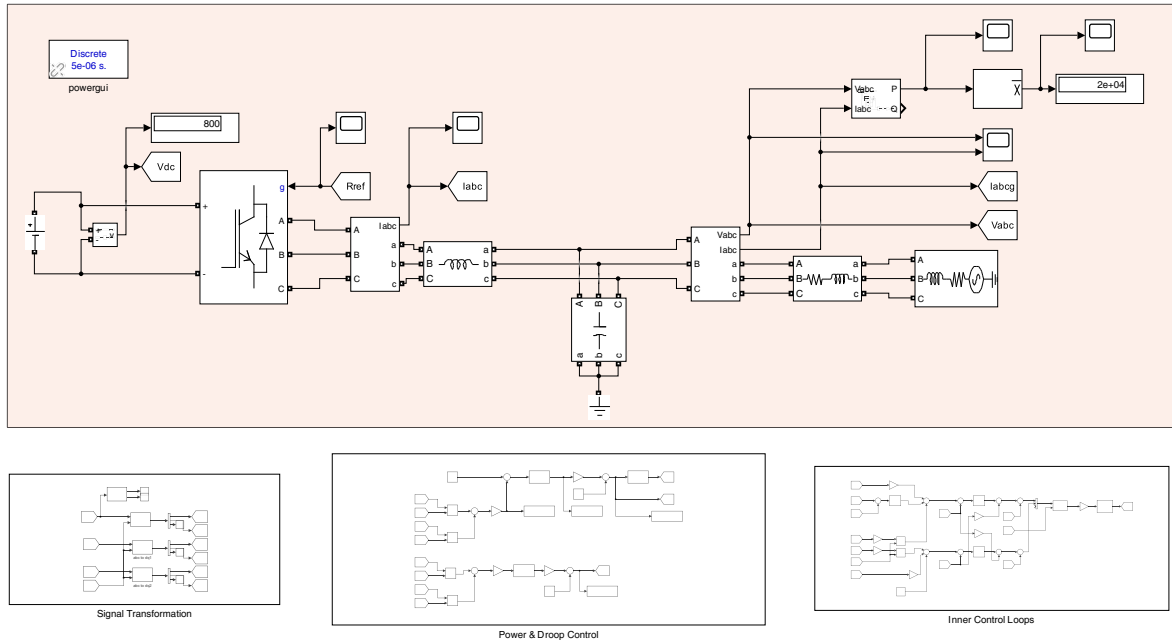


Figure 1: Overall Architecture of the Grid-Forming Inverter System.

2 Advanced Control Strategy

The control structure of the Grid-Forming Inverter mimics the physical dynamics of a traditional Synchronous Generator (SG). It generates its own internal voltage angle and magnitude using outer power droop loops, followed by fast inner voltage and current loops.

2.1 Power Calculation and Droop Control

The outer control loop (shown in Figure 2) is responsible for calculating the instantaneous active (P) and reactive (Q) powers using the measured d and q -axis voltages and currents:

$$P = \frac{3}{2}(v_d i_d + v_q i_q), \quad Q = \frac{3}{2}(v_q i_d - v_d i_q) \quad (1)$$

To eliminate high-frequency ripples and power oscillations, the calculated powers are passed through a first-order low-pass filter with a transfer function of $30/(s + 30)$.

The filtered active power is then fed into the **Frequency Droop Controller** ($P - \omega$). This controller allows multiple parallel inverters to share active power by mimicking the mechanical speed governor of an SG:

$$\omega = \omega^* - m_p(P - P^*) \quad (2)$$

Where ω^* is the nominal angular frequency (100π rad/s) and P^* is the nominal setpoint (20 kW). The continuous integration of the generated frequency (ω) produces the internal phase angle ($\theta = \int \omega dt$) used for all $dq0$ transformations, completely eliminating the need for a Phase-Locked Loop (PLL) in steady-state grid-forming mode.

Simultaneously, the filtered reactive power is fed into the **Voltage Droop Controller** ($Q - V$) to generate the internal voltage magnitude reference:

$$V_{ref} = V^* - n_q(Q) \quad (3)$$

Where V^* is the nominal peak phase voltage (326.7 V).

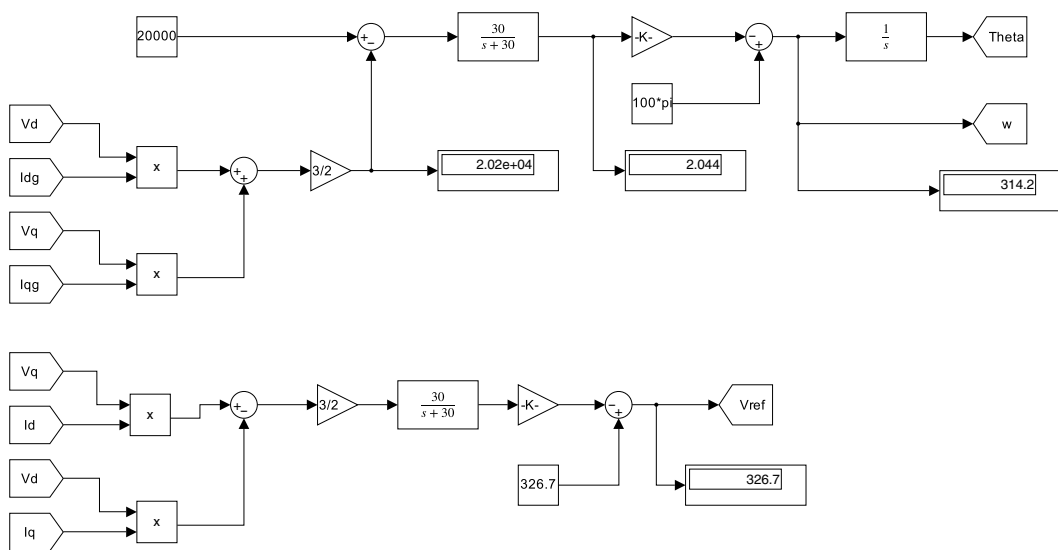


Figure 2: Power Calculation and $P - \omega$, $Q - V$ Droop Controllers.

2.2 Cascaded Voltage and Current Loops

To ensure that the inverter accurately synthesizes the V_{ref} calculated by the droop controller, a cascaded multi-loop architecture is implemented in the $dq0$ synchronous reference frame (Figure 3).

2.2.1 Inner Current Loop and Decoupling

The inner loop ($P = 100, I = 20000$) regulates the inverter output currents. Due to the rotating reference frame, a physical cross-coupling exists between the d and q axes. To guarantee independent control and prevent instability, **Feedforward Decoupling Terms** ($\pm\omega L \cdot i$) are added to the PI controller outputs.

The decoupled command voltages are converted back to the abc frame to generate the final modulating signals (U_{ref}) sent to the PWM generator.

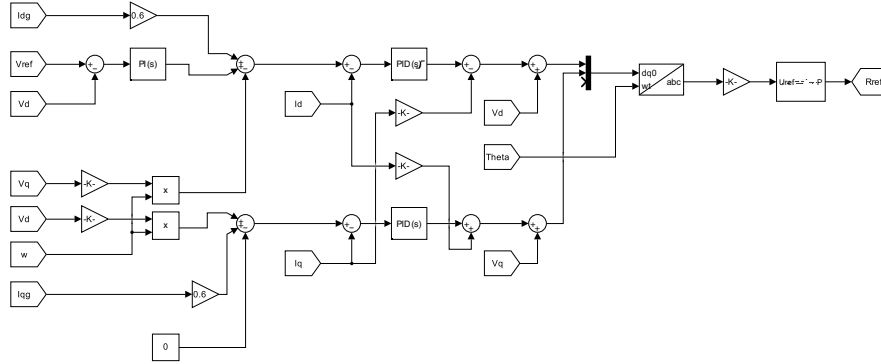


Figure 3: Cascaded Inner Control Loops showing PI controllers and Decoupling terms.

2.2.2 Outer Voltage Loop

The voltage loop regulates the voltage across the filter capacitor. A Proportional-Integral (PI) controller tracks the error between the generated reference V_{ref} (applied to the d -axis) and the actual capacitor voltage V_d . The q -axis voltage reference is strictly set to zero to align the voltage vector with the d -axis. The output of the voltage controllers serves as the reference currents (I_d^*, I_q^*) for the inner loop.

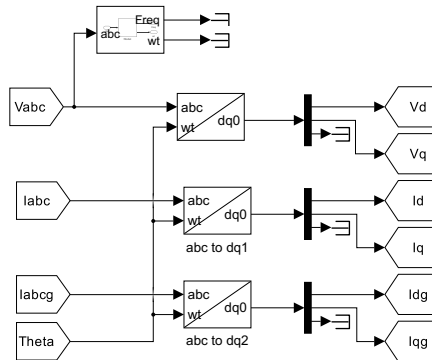



Figure 4: Signal Transformation Subsystem (abc to $dq0$).

3 Simulation Results and Analysis


The performance of the Grid-Forming Inverter was evaluated under steady-state and dynamic load sharing conditions.

3.1 Power Tracking and Droop Response

Figure 5 shows the response of the mean active power output. After initialization the power rises to a peak of about 21.5 kW (an overshoot of about 7.5%) at $t \approx 0.5$ s, then settles at 20 kW, equal to the reference P^* , by about $t \approx 1$ s with no visible steady-state error. In steady state the inverter frequency equals the grid frequency, so the droop law of Eq. (2) returns $P = P^*$; during the transient the droop adjusts the internal frequency.

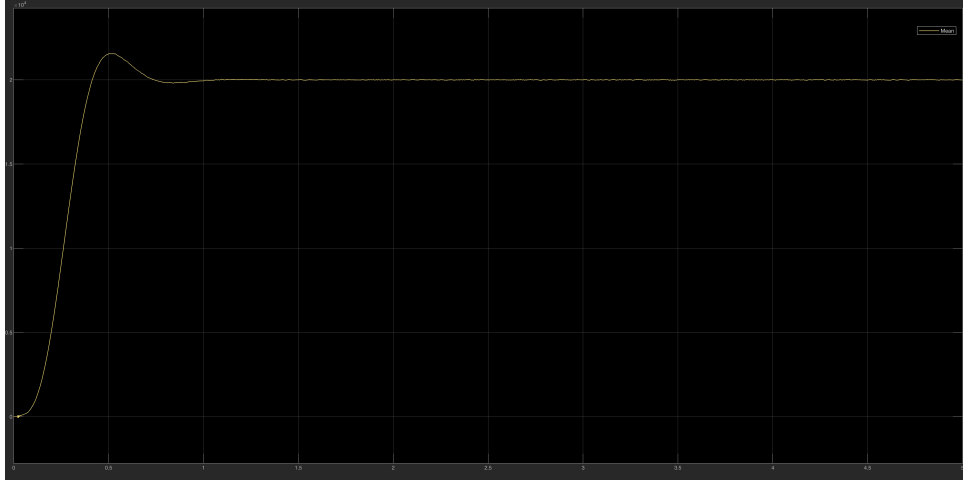

(a) Active Power Output Tracking

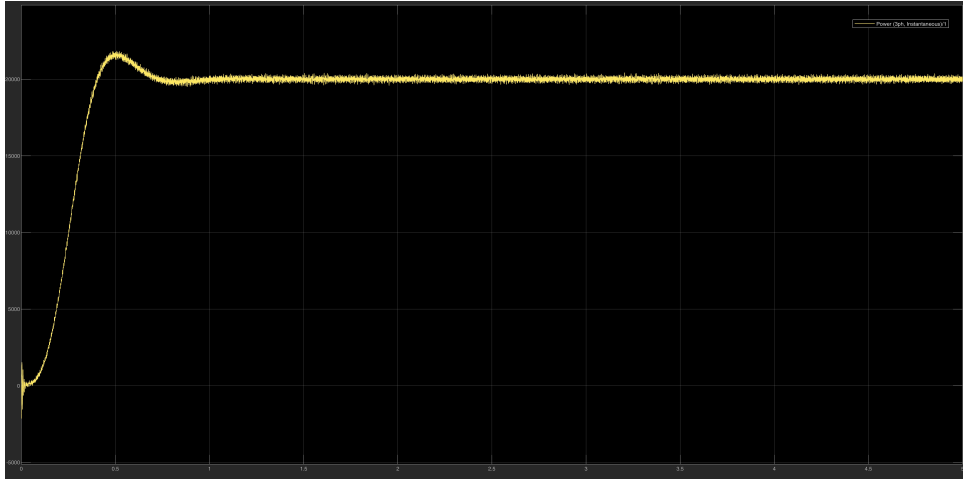


(b) Three-Phase Output Power Dynamics


Figure 5: Power response exhibiting stable tracking driven by the Droop Control loop.

3.2 Voltage Quality and Inverter Waveforms

The inverter produces a sinusoidal output voltage at the AC interface. Figure 6 demonstrates the three-phase output voltage and current waveforms. The LCL filter together with the fast inner current PI loop attenuates the switching harmonics generated by the PWM mechanism (Figure 7).

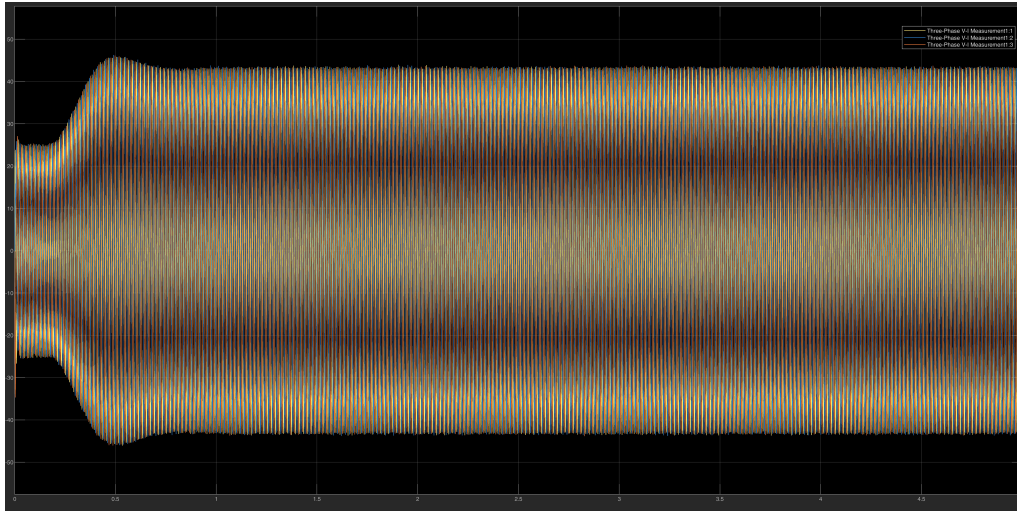

(a) Steady-state Three-Phase Waveforms

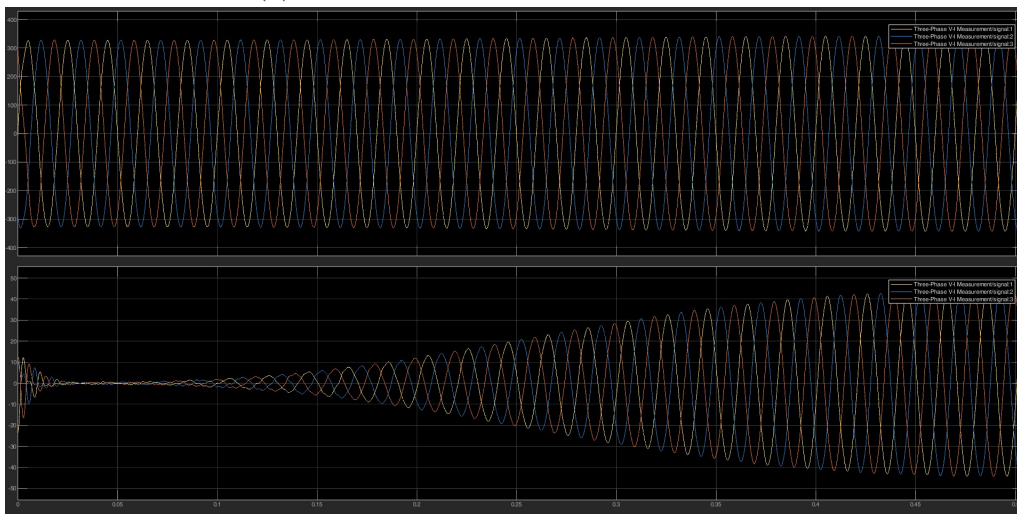

(b) Zoomed-in view showing smooth sinusoidal waveforms

Figure 6: Generated Voltage and Current waveforms at the AC grid interface.

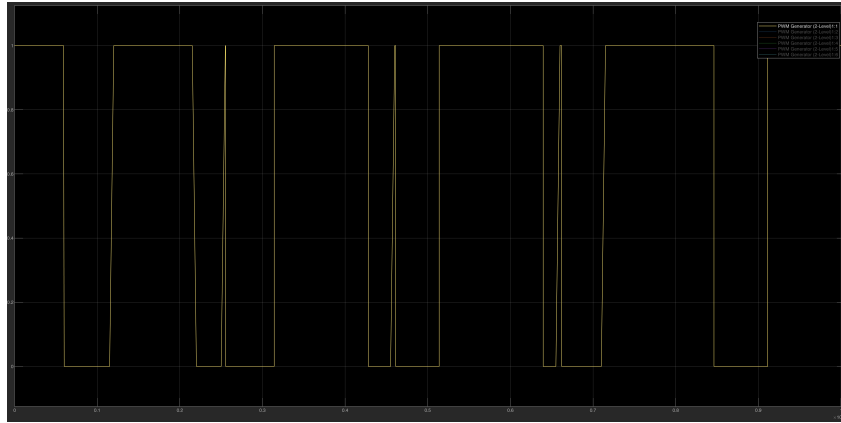


Figure 7: Zoomed-in view of the 5 kHz Pulse Width Modulation (PWM) signals.

4 Conclusion

The design and simulation of the Grid-Forming Voltage Source Inverter were carried out in MATLAB/Simulink. The control architecture regulates the output voltage magnitude and frequency autonomously through droop control. The outer $P - \omega$ and $Q - V$ droop loops generate the internal angle and voltage reference, and the active power settles in a well-damped response. Furthermore, the $dq0$ -based cascaded inner loops, fortified with decoupling terms, provide reference tracking with a sinusoidal output. Load-step response and power sharing between several inverters were not simulated and are the natural next steps toward isolated-microgrid operation.