

Analog & Digital Communication (EE3003)

Date: September 23, 2024

Course Instructor(s)

1. Dr. S. M. Sajid (CM)

2. Mohsin Yousuf

Sessional-I Exam

Total Time (Hrs): 1

Total Marks: 40

Total Questions: 3

Roll No

Section

Stud

Do not write below this line

1. Attempt all questions and remember to solve parts of the same question together.
2. Show all the steps with the help of diagrams and equations.

CLO # 01: Recognize the parameters of a communication system and the noise/distortion therein.

Q1:

[10 marks]

(a) State Shannon's theorem and clearly **define** all the terms used therein.

[5]

(b) Provide the relationship between SNR (Signal-to-Noise ratio) and B (Bandwidth) in the simplest terms.

[2]

(c) If SNR is increased by a factor of 4 in part (b), **compute** the effect on the corresponding bandwidth.

[3]

CLO # 01: Recognize the parameters of a communication system and the noise/distortion therein.

Q2: Signals $g_1(t) = 5000 \text{ rect}(5 \times 10^3 t)$ and $g_2(t) = \delta(t)$ are applied at the inputs of ideal low-pass filters (LPFs); $H_1(\omega) = \text{rect}(\omega/20,000\pi)$ and $H_2(\omega) = \text{rect}(\omega/10,000\pi)$. The outputs of $y_1(t)$ and $y_2(t)$ of these filters multiplied to obtain the signal $y(t) = y_1(t)y_2(t)$. Answer the following:

[15 marks]

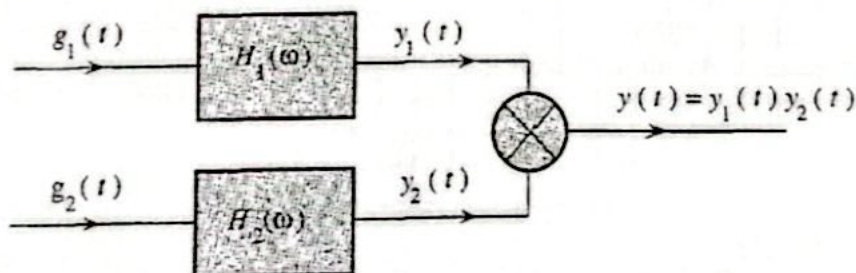


Figure 1: Signals passing through LPF and multiplier

- (a) Sketch $G_1(\omega)$ and $G_2(\omega)$. [4]
 (b) Sketch $H_1(\omega)$ and $H_2(\omega)$. [4]
 (c) Sketch $Y_1(\omega)$ and $Y_2(\omega)$. [4]
 (d) Identify $Y(\omega)$ in terms of $Y_1(\omega)$ and $Y_2(\omega)$ and comment on its bandwidth. [3]

CLO # 02: Compute energy and power spectral density of the signal.

Q3:

[15 marks]

- (a) For the signal,

[8]

$$g(t) = \frac{2a}{t^2 + a^2}$$

Determine the essential bandwidth B Hz of $g(t)$ such that the energy contained in the spectral components of $g(t)$ of frequencies below B Hz is 97% of the signal energy.

Hint:

$$e^{-a|t|} \Leftrightarrow \frac{2a}{a^2 + \omega^2}$$

Use symmetry property: $G(t) \Leftrightarrow 2\pi g(-\omega)$ to find the spectrum $G(\omega)$ and ESD $\Psi_g(\omega)$ of the given signal.

$$E_g = \frac{1}{\pi} \int_0^{\infty} |G(\omega)|^2 d\omega$$

- (10) Figure 2 shows a random binary pulse train $g(t)$. The pulse width is $T_b/2$ and the amplitude is A . One binary digit is transmitted every T_b seconds. A binary 1 is transmitted by the positive pulse A , and a binary 0 is transmitted by the negative pulse $-A$. The two symbols are equally likely and occur randomly.

[7]

Determine the autocorrelation function and PSD.

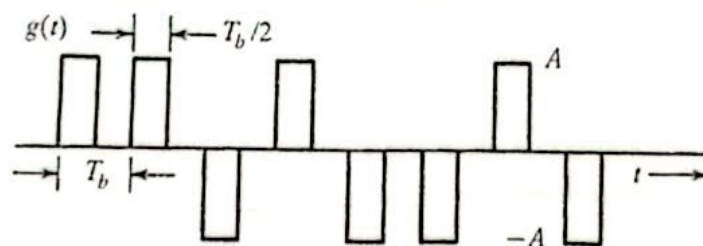


Figure 2 A binary pulse train

**Analog & Digital
Communication (EE3003)**

Date: November 04, 2024

Course Instructor(s)

1. Dr. S. M. Sajid (CM)

2. Mohsin Yousuf

Sessional-II Exam

Total Time (Hrs): 1

Total Marks: 45

Total Questions: 3

Roll No

Section

Student

Do not write below this line

1. Attempt all questions and remember to solve parts of the same question together.
2. Show all the steps with the help of diagrams and equations.

CLO # 03: Demonstrate the concept of analog amplitude modulation and demodulation techniques

[15 marks]

Q1:

- (a) Describe the principle of operation of a Switching Modulator clearly illustrating (through time and frequency domain representation) the conversion of a message signal, $m(t)$ to a modulated signal of the form $m(t) \cos \omega_c t$. [10]
[Block diagram of the modulator is not required in this part; the concept of periodic on-off switching has to be utilized].
- (b) Draw complete circuit diagram of a "Ring Modulator" and prove that it achieves the switching operation. [5]

CLO # 03: Demonstrate the concept of analog amplitude modulation and demodulation techniques

[15 marks]

Q2:

- (a) Define ^{synchronous} coherent demodulation and draw its general block diagram. [4]
- (b) Describe the main difference between envelope detector and rectifier detector as used in conventional AM. [4]
- (c) We want to detect the message signal, $m(t)$ from a conventional AM signal, $[A + m(t)] \cos \omega_c t$, (regardless of the value of A) using coherent detector in part (a) with slight modification. Draw the block diagram and write the equations for each block. (Remember to achieve exactly $m(t)$ at the output). [7]

CLO #04: Demonstrate the concept of analog frequency modulation and demodulation techniques

Q3: An angle-modulated signal with carrier frequency, $\omega_c = 2\pi \times 10^6$ rad/s is described by, [15 marks]

$$\varphi_{EM}(t) = 10 \cos(\omega_c t + 0.1 \sin 2000\pi t)$$

- (a) Find the power of modulated signal. [2]
(b) Find frequency deviation, Δf . [6]
(c) Find phase deviation, $\Delta\phi$. [2]
(d) Estimate the bandwidth of $\varphi_{EM}(t)$. [5]

mod) $\{A + m(t)\} \cos^2 \omega_c t$

LPF $\left[\frac{1}{2} x(t) + \frac{1}{4} \cos 2\omega_c t x(t) \right]$

$A + m(t) \rightarrow$ DC blocker $\rightarrow m(t)$

Analog and Digital Communication (EE3003)

Date: December 30, 2024

Course Instructor(s)

1. Dr. S. M. Sajid (CM)

2. Mohsin Yousuf

Final Exam

Total Time (Hrs): 3

Total Marks: 100

Total Questions: 5

Roll No

Section

Stu


Do not write below this line

1. Attempt all the questions. Attempt all parts of the same question together.
2. Show all the steps with the help of diagrams and mathematical equations.


CLO # 01: Recognize the parameters of a communication system and the noise/distortion therein.

Q1: A multipath transmission occurs when a transmitted signal arrives at the receiver by two or more different paths as shown in the figure ahead.

[20 marks]

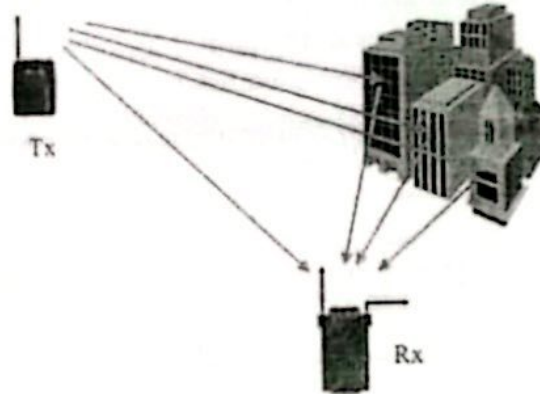

A simple model for a multipath (in this case two) communication channel is illustrated in the figure below.

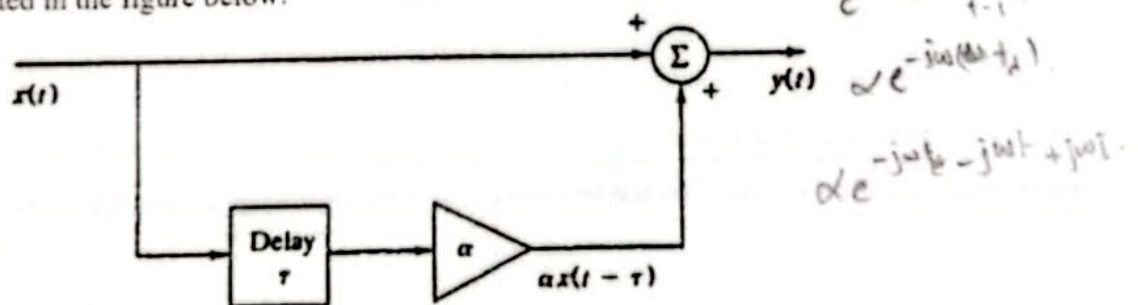

- (a) Write the output $y(t)$ and the system transfer function, $H(\omega)$ for this multipath channel. [12]
- (b) Sketch the magnitude spectrum $|H(\omega)|$ vs ω for $\alpha = 1$ and 0.5 on the same plot. [8]

CLO # 02: Compute energy and power spectral density of the signal.

Q2:

(a) For the signal,

$$g(t) = \frac{12a}{t^2 + a^2}$$

Determine the essential bandwidth B Hz of $g(t)$ such that the energy contained in the spectral components of $g(t)$ of frequencies below B Hz is 95% of the signal energy.

$$\frac{1.498}{a} \text{ rad/s} \\ \underline{\underline{0.2384 \text{ Hz}}}$$

Hint part (a):

$$e^{-a|t|} \Leftrightarrow \frac{2a}{a^2 + \omega^2}$$

Use symmetry property:

$$G(t) \Leftrightarrow 2\pi g(-\omega)$$

to find the spectrum $G(\omega)$.

The energy can be computed as:

$$E_g = \frac{1}{\pi} \int_0^\infty |G(\omega)|^2 d\omega$$

[20 marks]
[10]

$$e^{-a/|\omega|} \rightarrow \frac{1}{2a}$$

$$\frac{12a e^{-a/|\omega|}}{2\pi} \rightarrow \frac{12a}{2\pi} \cdot \frac{1}{a^2 + \omega^2}$$


$$\frac{12a}{\pi(a^2 + \omega^2)}$$

(b) Figure shows a random binary pulse train $g(t)$. The pulse width is $T_b/2$ and one binary digit (bit) is transmitted every T_b seconds. A binary 1 is transmitted by the positive pulse of amplitude 1 V, and a binary 0 is transmitted by a negative pulse of amplitude -1 V. The two symbols are equally likely and occur randomly.

Determine the autocorrelation function $R_g(\tau)$ and PSD $S_g(\omega)$. Sketch them as well.

Hint part (b):

$$\Delta\left(\frac{t}{\tau}\right) \Leftrightarrow \frac{\tau}{2} \text{sinc}^2\left(\frac{\omega\tau}{4}\right)$$

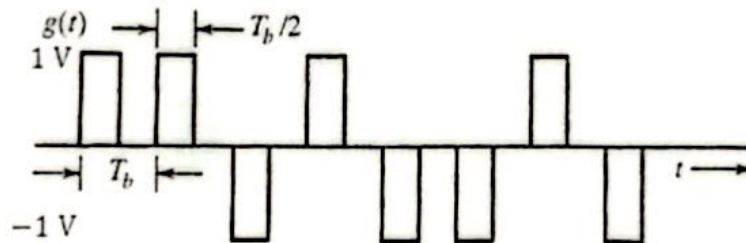

CLO # 03: Demonstrate the concept of analog amplitude modulation and demodulation techniques.

Q3: Consider an AM signal with dual-tone modulation where the modulation signal $m(t)$ is given by

$$m(t) = \cos \omega_m t + 2 \sin 3\omega_m t$$

and the carrier $c(t)$ is given by

$$c(t) = 5 \cos \omega_c t; \text{ where } \omega_c \gg \omega_m$$

(a) Find the following:

- $\phi_{AM}(t)$, AM modulated signal.
- $\Phi_{AM}(\omega)$, the spectrum of the AM modulated signal.
- Sketch the spectrum of the dual tone AM modulated signal.

[20 marks]

$$(5 + \cos \omega_m t + 2 \sin 3\omega_m t) \cos \omega_c t$$

[12]

2.5b → A
7.5 → 2.5b

(b) An amplitude modulated signal is given by

$$\varphi_{AM}(t) = 2.5 [b + 3 \cos \omega_m t] \cos \omega_c t, \text{ for } \omega_m \ll \omega_c$$

Find the power efficiency ' η ' of the AM signal for, (i) $b = 9$ and (ii) $b = 3$.

Suggest which value of b results in better η .

[8]


$$\frac{\mu^2}{2 + \mu^2}$$

$$\mu = \frac{7.5}{2.5b}$$


CLO # 04: Demonstrate the concept of analog frequency modulation and demodulation techniques.

Q4: A message signal $m(t)$, shown in figure below, modulates a carrier with frequency $f_c = 10 \text{ kHz}$ with $\Delta f = 1 \text{ kHz}$. The carrier amplitude is A . When the modulated signal is passed through the channel its amplitude is changed randomly. The received signal is demodulated by passing through different blocks as shown in the following block diagram.

[20 marks]

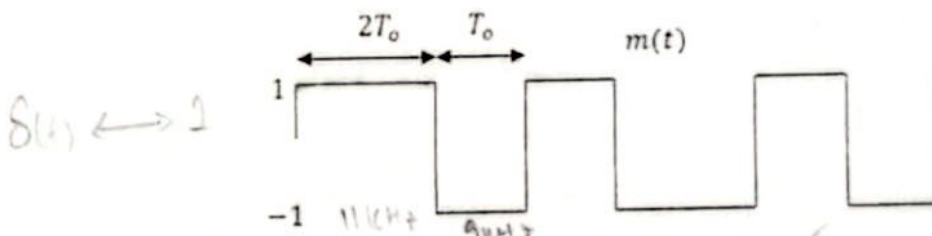

Sketch the output wave form, approximated, at points a, b, c, d, and e. Find the values of f_c and Δf at point c.

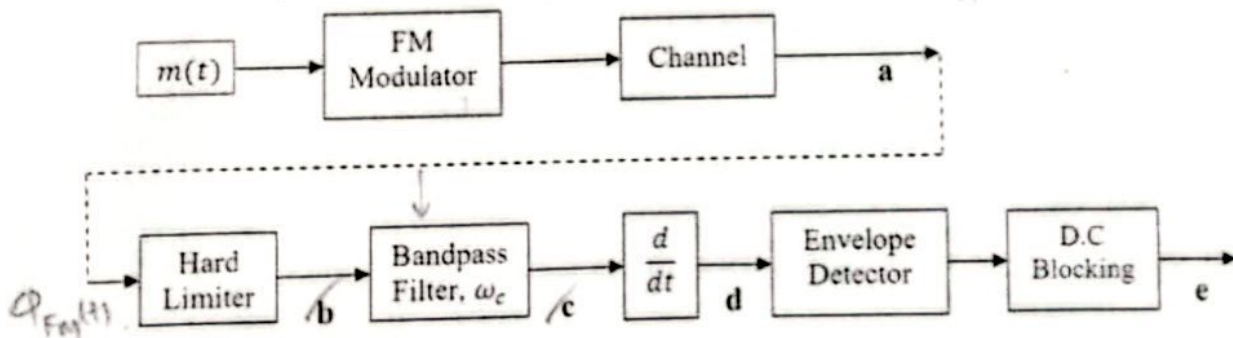

CLO # 05: Demonstrate analog signal to digital signal conversion with encoding and Interpret demodulation/detection of digital signals.

Q5:

[20 marks]

(a) Draw the block diagram of DPCM (Differential Pulse Code Modulation) transmitter and receiver by using a 3rd order linear predictor. Why we need a Quantizer block at the transmitter side? Demonstrate with the help of necessary equations.

[10]

[10]

- (b) Five telemetry signals, each of bandwidth 2 kHz, are to be transmitted simultaneously by binary PCM. The maximum tolerable error in sample amplitudes is 0.15% of the peak signal amplitude. The signals must be sampled at least 25% above the Nyquist rate. Framing and synchronizing requires an additional 1% extra bits. Answer the following:

Sampling
quantization
noise margin

- (i) **Determine** the *sampling rate* by considering the criteria given above.
(ii) **Determine** the *minimum possible data rate* possible to achieve by catering multiplexing and the extra bits.
(iii) **Also, find** the *minimum transmission bandwidth* required to transmit the signal.

$$\frac{A^2}{12} = \frac{(\Delta_{\text{mp}}/L)^2}{12} = \frac{A_{\text{mp}}^2}{L^2 \sqrt{3}} = \frac{w_p^2}{3 \cdot 2}$$