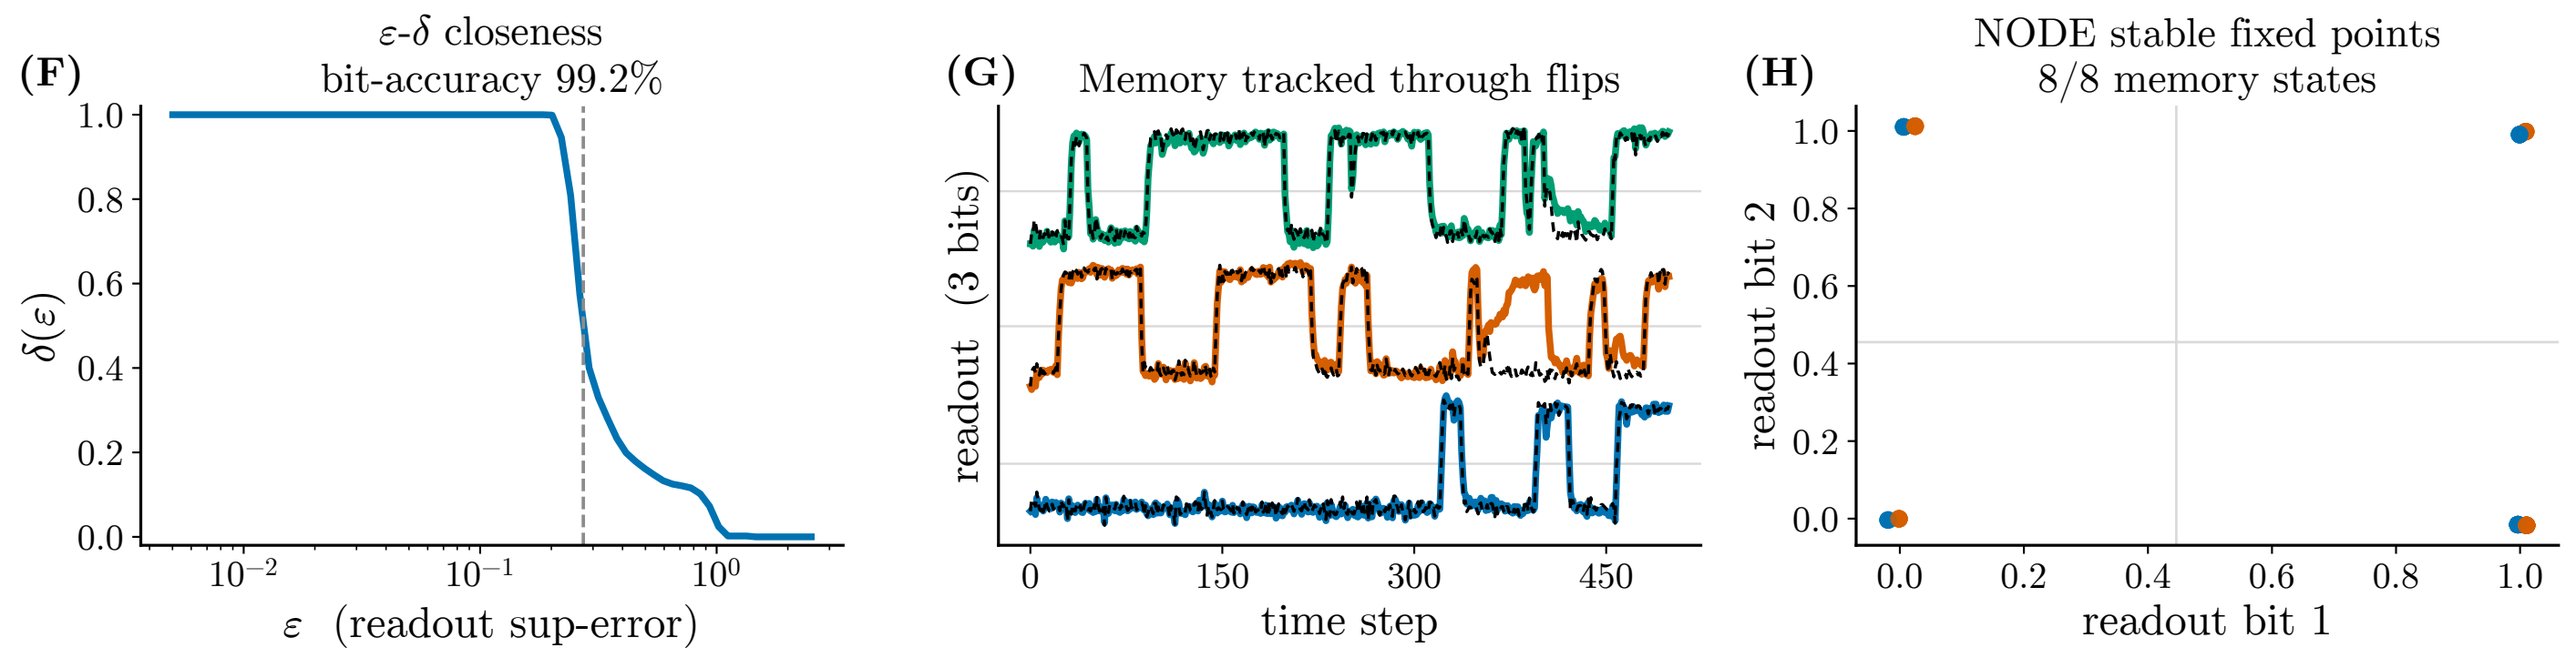
(F)
ε-δ closeness
bit-accuracy 99.2%
1.0
0.8
0.6
0.4
0.2
0.0
δ(ε)
10^−2
10^−1
10^0
ε (readout sup-error)
(G)
Memory tracked through flips
readout (3 bits)
0
150
300
450
time step
(H)
NODE stable fixed points
8/8 memory states
readout bit 2
0.0
0.2
0.4
0.6
0.8
1.0
readout bit 1