



POR T CATALOGUE

2023

VER 2.0





COMPANY PROFILE

● Professional Brand

The world's leading manufacturer of off the road tyres is both the **1st manufacturer** in China for **12 years** and one of the **TOP 10** manufacturers in the world continuously for 9 years, who is the practitioner of carbon neutral concept.

● Superior products

Covering **construction and mining** tires, **agricultural** tires, **port** tires, **forestry** tires and **sand** tires, etc **OTR** tires.

● Quality Assurance

Compliance with **ISO9001** Quality Management System, **ISO14001** Environmental Management System, **ISO45001** Occupational Health and Safety Management Systems. Meet the legal requirements of **ECE& REACH**.

● Service guarantee

The sales service network of TIANLI extends the major provinces and cities across China and more than **100 countries** worldwide. In the meantime, TIANLI provides customization and one-stop tire solutions to our customers.

Contents

PAGE	PATTERN	
01	RSS (IND-3)	ROCK STAR SUPREME (IND-3)
02	IS (IND-3)	INDUSTRIAL SPECIAL (IND-3)
03	HARBOUR3 (IND-3)	
04	HARBOUR3A (IND-3)	
05	DNR (Z) (IND-3)	DIRT N'ROCK (Z) (IND-3)
06	DNR (Z) II (IND-3)	DIRT N' ROCK (Z) II (IND-3)
07	DNRZIII (IND-3)	DIRT N' ROCK (Z)III (IND-3)
08	Harbour (IND-3)	Harbour Master (IND-3)
09	HARBOUR4A (IND-4)	
10	HARBOUR4PRO (IND-4)	
11	IS (IND-4)	INDUSTRIAL SPECIAL (IND-4)
12	RSS (IND-4)	ROCK STAR SUPREME (IND-4)
13	SD&R (IND-4)	SUPER DIRT N' ROCK (IND-4)
14	SD&R II (IND-4)	SUPER DIRT N' ROCK II (IND-4)
15	SS (IND-4)	SOOPER SCOOOPER (IND-4)
16	SMCXT4 (IND-4)	SUPER MINING CONSTRUCTION EXTRA TREAD 4 (IND-4)
17	SMLS (IND-4)	SUPER MINING LOGGER SERVICE (IND-4)
18	SXMH (IND-4)	SUPER EXTRA MINE HAULAGE (IND-4)
19	DWL (IND-4)	DOUBLE WIDTH LUG (IND-4)
20	IM (IND-4)	INDUSTRIAL MASTER (IND-4)
21	HM-HT (IND-4)	HARBOUR MASTER-HALFTRACK (IND-4)
22	SS (IND-5)	SOOPER SCOOOPER (IND-5)
23	HM (IND-5)	HARBOUR MASTER (IND-5)
24	TUP408	
25	TUP420	

RSS (IND-3)

ROCK STAR SUPREME (IND-3)



- The specially designed strong nylon carcass is more suitable for harbor services of high torque and heavy load than regular tire.
- Wide pattern design tread provides a longer tire life in harbor services.
- Suitable for straddle carriers, container forklifts, reach stackers and other machinery.

RSS (IND-3)						TRA: IND-3
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
18.00-25	40	TL	34.0	13.00/2.5	1594	504
	42	TL				
21.00-35	40	TL	35.0	15.00/3.0	2004	572
	42	TL				
24.00-35	44	TL	38.0	17.00/3.5	2128	653
	48	TL				

IS (IND-3)

INDUSTRIAL SPECIAL (IND-3)



- Strong nylon carcass provides superior load carrying capacity.
- This special carcass design is more suitable for harbor services of high torque and heavy load than regular tire.
- The wide riding tread, heavy lugs provide a superior long tire life.
- Suitable for container forklifts and other machineries.

IS (IND-3)				TRA: IND-3		
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00-20	20	TT	20.0	8.50	1173	315

HARBOUR3 (IND-3)



- Special products for port machinery equipment vehicles, mainly used for gantry crane.
- It provides superior wear resistance and high sidewall strength.
- Suitable for low-speed use, not easy to drum or leak.

HARBOUR3 (IND-3)

TRA: IND-3

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
14.00-24	28	TT	32.0	10.0	1370	375

HARBOUR3A (IND-3)



- Special products for port machinery equipment vehicles, mainly used for gantry crane.
- It provides superior wear resistance and high sidewall strength.
- Suitable for low-speed use, not easy to drum or leak.

HARBOUR3A (IND-3)

TRA: IND-3

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
16.00-25	32	TL	32.0	11.25/2.0	1495	430
	36	TL				
18.00-25	40	TL	36.0	13.00/2.5	1615	510
21.00-25	40	TL	38.0	15.00/3.0	1750	570

DNR (Z) (IND-3)

DIRT N' ROCK (Z) (IND-3)



- Strong nylon carcass provides a high load carrying capacity.
- This specially designed carcass is more suitable for harbour services of high torque and heavy load than regular tire.
- The wider "double-herringbone" and non-directional tread bars make the tire better resistance to heat buildup and good slippage-proof.
- Suitable for straddle carriers, container forklifts, reach stackers and other machinery.

DNR(Z) (IND-3)					TRA: IND-3	
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
16.00-25	28	TT/TL	28.5	11.25/2.0	1483	455
	32	TT/TL				
18.00-33	40	TL	31.5	13.00/2.5	1811	528
21.00-35	40	TL	34.5	15.00/3.0	2004	589
	44	TL				
24.00-29	42	TL	38.0	17.00/3.5	1968	681

DNR (Z) II (IND-3)

DIRT N' ROCK (Z) II (IND-3)



- Strong nylon carcass provides superior load capability.
- This special carcass design is more suitable for harbour services of high torque and heavy load than regular tire.
- The wider "double-herringbone" and non-directional tread bars make the tire better resistance to heat build-up, good slippage-proof and provide good performance at higher speed over long working hours.
- Suitable for straddle carriers, container forklifts, reach stackers and other machinery.

DNR(Z) II (IND-3)

TRA: IND-3

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00-24	20	TT	22.0	8.50	1247	312
	24	TT/TL				

DNRZIII (IND-3)

DIRT N' ROCK (Z) III (IND-3)



- Strong nylon carcass provides superior load capability.
- This special carcass design is more suitable for harbour services of high torque and heavy load than regular tire.
- The wider "double-herringbone" and non-directional tread bars make the tire better resistance to heat build-up, good slippage-proof and provide good performance at higher speed over long working hours.
- Suitable for straddle carriers, container forklifts, reach stackers and other machinery.

DNRZIII (IND-3)

TRA: IND-3

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
	24	TT/TL				
14.00-24	28	TT/TL	30.0	10.00WA、10.00VA	1368	376
	32	TT/TL				
23.5-25	40	TL	38.0	19.50/2.5	1618	597

Harbour (IND-3)

Harbour Master (IND-3)



- Strong nylon carcass provides superior load capability.
- This special carcass design is more suitable for harbour services of high torque and heavy load than regular tire.
- The wider "double-herringbone" and non-directional tread bars make the tire better resistance to heat build-up, good slippage-proof and provide good performance at higher speed over long working hours.
- Suitable for straddle carriers, container forklifts, reach stackers and other machinery.

Harbour (IND-3)

TRA: IND-3

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
18.00-25	40	TT/TL	31.5	13.00/2.5	1618	498
	42	TL				
21.00-25	44	TL	37.0	15.00/3.0	1758	575
	40	TL				

※ 18.00-25 Harbour pattern is the left one;
21.00-25 Harbour pattern is the right one

HARBOUR4A (IND-4)



- Special products for port machinery equipment vehicles, mainly used for front lifting and stacking machine.
- It provides superior wear resistance and high sidewall strength.
- Suitable for low-speed use, for instance, construction sites and other road conditions, not easy to drum or leak.

HARBOUR4A (IND-4)						TRA: IND-4
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00-24	24	TT	35.0	8.5	1245	315
14.00-24	28	TT/TL	50.0	10.0	1370	375
16.00-25	32	TL	50.0	11.25/2.0	1495	430
	36	TL				
18.00-25	40	TL	55.0	13.00/2.5	1675	512
18.00-33	40	TL	70.0	13.00/2.5	1875	510

HARBOUR4PRO (IND-4)



- Special products for port machinery equipment vehicles, mainly used for front lifting and stacking machine.
- It provides superior wear resistance and high sidewall strength.
- Suitable for low-speed use, for instance, construction sites and other road conditions, not easy to drum or leak.

HARBOUR4PRO (IND-4)

TRA: IND-4

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
14.00-24	28	TT/TL	58.0	10.0/10.00VA	1420	375
18.00-25	40	TL	70.0	13.00/2.5	1675	500

IS (IND-4)

INDUSTRIAL SPECIAL (IND-4)



- Strong nylon carcass provides superior load carrying capacity.
- This special carcass design is more suitable for harbour services of high torque and heavy load than regular tire.
- The wide riding tread, heavy lugs and extra deep tread provide a superior long tire life, reduce downtime loss from frequent tire changing and lower cost per hour.
- Suitable for straddle carriers, container forklifts and other machineries.

IS (IND-4)						TRA: IND-4
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00-24	24	TT	33.5	8.50	1275	315
	24	TT/TL				
14.00-24	28	TT/TL	43.5	10.00WA、10.00VA	1418	375
	32	TT/TL				
18.00-25	40	TL	55.0	13.00/2.5	1673	498

RSS (IND-4)

ROCK STAR SUPREME (IND-4)



- Strong nylon carcass and extra deep tread provide a longer tire life in harbor services.
- The special construction design makes the tire more suitable for harbor services of high torque and heavy load than regular tire.
- Suitable for straddle carriers, container forklifts and other machinery.

RSS (IND-4)				TRA: IND-4		
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
18.00-33	36	TL	56.0	13.00/2.5	1877	498
	40	TL				

SD&R (IND-4)

SUPER DIRT N' ROCK (IND-4)



- Strong nylon carcass and premium deep tread design provide a longer tire life.
- The extra wide and deep lugs reduce slippage, increase stability and offer good traction, but its heat resistance is not good as IND-3 tires.
- Suitable for straddle carriers, container forklifts, reach stackers and other machinery.

SD&R (IND-4)

TRA: IND-4

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
21.00-35	42	TL	53.5	15.00/3.0	2042	589
24.00-49	48	TL	57.0	17.00/3.5	2512	686

SD&R II (IND-4)

SUPER DIRT N' ROCK II (IND-4)



- Strong nylon carcass and premium deep tread design provide a longer tire life.
- The extra wide and deep lugs reduce slippage, increase stability and offer good traction, but its heat resistance is not good as IND-3 tires.
- Suitable for straddle carriers, container forklifts, reach stackers and other machinery.

SD&R II (IND-4)

TRA: IND-4

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
18.00-33	36	TL	53.5	13.00/2.5	1877	498
	40	TL				

SS (IND-4)

SOOPER SCOPER (IND-4)



- The specially designed strong nylon carcass provides superior load carrying capacity.
- This special carcass design is more suitable for harbor services of high torque and heavy load than regular tire.
- The wide riding tread surface, smooth tread pattern with no lugs and extra deep tread provide a superior long tire life, reduce downtime loss from frequent tire changing and lower cost per hour.
- Good operation on rough road surface.
- Suitable for reach stackers, container forklifts and other machineries.

SS (IND-4)				TRA: IND-4		
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
14.00-24	28	TL	45.5	10.00WA、10.00VA	1359	361
	32	TT/TL				
16.00-25	32	TL	50.0	11.25/2.0	1486	414
18.00-25	40	TL	53.5	13.00/2.5	1673	498

SMCXT4 (IND-4)

SUPER MINING CONSTRUCTION EXTRA TREAD 4 (IND-4)



- Strong nylon carcass provides superior load carrying capacity.
- This special carcass design is more suitable for harbour services of high torque and heavy load than regular tire.
- The wide riding tread, heavy lugs and extra deep tread can provide a superior long tire life, reduce downtime loss from frequent tire changing and lower cost per hour.
- Suitable for straddle carriers, container forklifts and other machineries.

SMCXT4 (IND-4)						TRA: IND-4
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
16.00-25	28	TT/TL	50.5	11.25/2.0	1483	429
	32	TT/TL				
23.5-25	40	TL	63.5	19.50/2.5	1679	630

SMLS (IND-4)

SUPER MINING LOGGER SERVICE (IND-4)



- Strong nylon carcass construction for high rigidity and heavy-load carrying capacity.
- Cross and extra deep tread design can provide a superior long tire life.
- Greater numbers of lugs produce good radiation of heat.
- This harbour tire features both good heat resistance and wear resistance.
- Suitable for all kinds of harbour machinery.

SMLS (IND-4)						TRA: IND-4
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00-24	24	TT	35.0	8.50	1272	335
	24	TT				
14.00-24	28	TT/TL	44.5	10.00W	1412	404
	32	TT/TL				

SXMH (IND-4)

SUPER EXTRA MINE HAULAGE (IND-4)



- Strong nylon carcass provides superior load carrying capacity.
- This special carcass design is more suitable for harbour services of high torque and heavy load than regular tire.
- The wide riding tread, heavy lugs and extra deep tread can provide a superior long tire life, reduce downtime loss from frequent tire changing and lower cost per hour.
- Suitable for straddle carriers, container forklifts and other machineries.

SXMH (IND-4)						TRA: IND-4
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
14.00-24	24	TT	45.5	10.00WA、10.00VA	1356	361
	28	TT/TL				
16.00-25	28	TT/TL	50.5	11.25/2.0	1486	414
	32	TT/TL				
18.00-25	40	TL	53.5	13.00/2.5	1666	544

DWL (IND-4)

DOUBLE WIDTH LUG (IND-4)



- The Double Width Lug provide a longer tire life in harbor services.
- Suitable for straddle carriers, container forklifts and other machinery.

DWL (IND-4)						TRA: IND-4
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00-24	24	TT	40.0	8.5	1300	325
14.00-24	28	TT	45.5	10.00W	1418	375

※ 12.00-24 DWL (IND-4) pattern is the left one;
14.00-24 DWL (IND-4) pattern is the right one

IM (IND-4)

INDUSTRIAL MASTER (IND-4)



- Extra deep tread pattern for better resistance to wear abrasion and longer life.
- Suitable for straddle carriers, container forklifts and other machinery.

IM (IND-4)						TRA: IND-4
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00-24	24	TT	54.0	8.50	1275	315
14.00-24	28	TT/TL	57.0	10.00W	1418	375
18.00-25	40	TL	70.0	13.00/2.5	1673	517

HM-HT (IND-4) HARBOUR MASTER-HALF TRACK (IND-4)



- The specially designed semi-pattern and semi-smooth tire deals with the side wear effectively which feazes the user for harbor services tires.
- The wide riding tread, heavy lugs and extra deep tread provide a superior long tire life, reduce downtime loss from frequent tire changing and lower cost per hour.
- Suitable for straddle carriers, container forklifts and other machineries.

HM-HT (IND-4)						TRA: IND-4
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00-24	24	TT	45.0	8.50	1275	315
14.00-24	28	TT	55.0	10.00W	1418	375
18.00-25	40	TL	68.0	13.00/2.5	1673	498

SS (IND-5)

SOOPER SCOPER (IND-5)



- The specially designed strong nylon carcass provides superior load carrying capacity.
- This special carcass design is more suitable for harbor services of high torque and heavy load than regular tire.
- The wide riding tread surface, smooth tread pattern with no lugs and extra deep tread provide a superior long tire life, reduce downtime loss from frequent tire changing and lower cost per hour.
- Good operation on rough road surface.
- Suitable for reach stackers, container forklifts and other machineries.

SS (IND-5)						TRA: IND-5
Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
14.00-24	28	TT/TL	63.5	10.00WA、10.00VA	1418	375
	32	TT/TL				

HM (IND-5)

HARBOUR MASTER (IND-5)



- The specially designed strong nylon carcass provides superior load carrying capacity.
- This special carcass design is more suitable for harbour services of high torque and heavy load than regular tire.
- The wide riding tread, heavy lugs and extra deep tread provide a superior long tire life, reduce downtime loss from frequent tire changing and lower cost per hour.
- Suitable for straddle carriers, container forklifts and other machineries.

HM (IND-5)

TRA: IND-5

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
18.00-25	40	TL	78.0	13.00/2.5	1673	498

TUP408



- Strong and wide rib help offer outstanding stability and excellent traction.
- Special designed for terminal tractors.
- Static free compound.

TUP408

Tire Size	P. R.	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
280/75R22,5	163A8	TL	32.0	8.25	992	280
310/80R22,5	175A8	TL	32.0	9	1078	300

TUP420



- New generation radial heavy forklift tyres.
- Robust sidewall guarantee great low deflection rate.
- Cool running compound offer low heat build up in operation.

TUP420						TRA: IND-4
Tire Size	Load Speed Index	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00R24	178A5	TT/TL	40.0	8.50	1418	375
14.00R24	193A5	TT/TL	64.0	10.00/2.0	1418	375

Tire Size	Pattern	P. R./Load Speed Index	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
12.00-20	IS (IND-3)	20	TT	20.0	8.50	1173	315
12.00-24	DNR(Z)II (IND-3)	20	TT	22.0	8.50	1247	312
		24	TT/TL				
	IS (IND-4)	24	TT	33.5	8.50	1275	315
	HARBOUR4A (IND-4)	24	TT	35.0	8.50	1245	315
	SMLS (IND-4)	24	TT	35.0	8.50	1272	335
	DWL (IND-4)	24	TT	40.0	8.50	1300	325
	HM-HT (IND-4)	24	TT	45.0	8.50	1275	315
	IM (IND-4)	24	TT	54.0	8.50	1275	315
12.00R24	TUP420	178A5	TT/TL	40.0	8.50	1418	375
14.00-24	DNRZIII (IND-3)	24	TT/TL	30.0	10.00WA、10.00VA	1368	376
		28	TT/TL				
		32	TT/TL				
	HARBOUR3 (IND-3)	28	TT	32.0	10.0	1370	375
	IS (IND-4)	24	TT/TL	43.5	10.00WA、10.00VA	1418	375
		28	TT/TL				
		32	TT/TL				
	SMLS (IND-4)	24	TT	44.5	10.00W	1412	404
		28	TT/TL				
		32	TT/TL				
	SS (IND-4)	28	TL	45.5	10.00WA、10.00VA	1359	361
		32	TT/TL				
	SXMH (IND-4)	24	TT	45.5	10.00WA、10.00VA	1356	361
		28	TT/TL				
	DWL (IND-4)	28	TT	45.5	10.00W	1418	375
	HARBOUR4A (IND-4)	28	TT/TL	50.0	10.0	1370	375
	HM-HT (IND-4)	28	TT	55.0	10.00W	1418	375
	IM (IND-4)	28	TT	57.0	10.00W	1418	375
	HARBOUR4PRO (IND-4)	28	TT/TL	58.0	10.0/10.00VA	1420	375
	SS (IND-5)	28	TT/TL	63.5	10.00WA、10.00VA	1418	375
		32	TT/TL				
14.00R24	TUP420	193A5	TT/TL	64.0	10.00/2.0	1418	375

Tire Size	Pattern	P. R./ Load Speed Index	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
16.00-25	DNR(Z) (IND-3)	28	TT/TL	28.5	11.25/2.0	1483	455
		32	TT/TL				
	HARBOUR3A (IND-3)	32	TL	32.0	11.25/2.0	1495	430
		36	TL				
	HARBOUR4A (IND-4)	32	TL	50.0	11.25/2.0	1495	430
		36	TL				
	SMCXT4 (IND-4)	28	TT/TL	50.5	11.25/2.0	1483	429
		32	TT/TL				
	SS (IND-4)	32	TL	50.5	11.25/2.0	1486	414
	SXMH (IND-4)	28	TT/TL	50.5	11.25/2.0	1486	414
		32	TT/TL				
18.00-25	Harbour (IND-3)	40	TT/TL	31.5	13.00/2.5	1618	498
		42	TL				
		44	TL				
	RSS (IND-3)	40	TL	34.0	13.00/2.5	1594	504
		42	TL				
	HARBOUR3A(IND-3)	40	TL	36.0	13.00/2.5	1615	510
	SS (IND-4)	40	TL	53.5	13.00/2.5	1673	498
	SXMH (IND-4)	40	TL	53.5	13.00/2.5	1666	544
	HARBOUR4A (IND-4)	40	TL	55.0	13.00/2.5	1675	512
	IS (IND-4)	40	TL	55.0	13.00/2.5	1673	498
	HM-HT (IND-4)	40	TL	68.0	13.00/2.5	1673	498
	HARBOUR4PRO (IND-4)	40	TL	70.0	13.00/2.5	1675	500
	IM (IND-4)	40	TL	70.0	13.00/2.5	1673	517
	HM (IND-5)	40	TL	78.0	13.00/2.5	1673	498
18.00-33	DNR(Z) (IND-3)	40	TL	31.5	13.00/2.5	1811	528
	SD&RII (IND-4)	36	TL	53.5	13.00/2.5	1877	498
		40	TL				
	RSS (IND-4)	36	TL	56.0	13.00/2.5	1877	498
		40	TL				
	HARBOUR4A (IND-4)	40	TL	70.0	13.00/2.5	1875	510

Tire Size	Pattern	P. R./Load Speed Index	TT/TL	Tread Depth mm	Rim	Outer Diameter mm	Section Width mm
21.00-25	Harbour (IND-3)	40	TL	37.0	15.00/3.0	1758	575
		44	TL				
	HARBOUR3A (IND-3)	40	TL	38.0	15.00/3.0	1750	570
21.00-35	DNR(Z) (IND-3)	40	TL	34.5	15.00/3.0	2004	589
		44	TL				
	RSS (IND-3)	40	TL	35.0	15.00/3.0	2004	572
		42	TL				
		44	TL				
	SD&R (IND-4)	42	TL	53.5	15.00/3.0	2042	589
23.5-25	DNRZIII (IND-3)	40	TL	38.0	19.50/2.5	1618	597
	SMCXT4 (IND-4)	40	TL	63.5	19.50/2.5	1679	630
24.00-29	DNR(Z) (IND-3)	42	TL	38.0	17.00/3.5	1968	681
24.00-35	RSS (IND-3)	48	TL	38.0	17.00/3.5	2128	653
24.00-49	SD&R (IND-4)	48	TL	57.0	17.00/3.5	2512	686
280/75R22.5	TUP408	163A8	TL	32.0	8.25	992	280
310/80R22.5	TUP408	175A8	TL	32.0	9	1078	300

TRA Code	Tread Type	TIANLI Pattern		
IND: Industrial				
IND-3	Regular Tread		HARBOUR3 (IND-3)	HARBOUR3A (IND-3)
			Harbour (IND-3)	RSS (IND-3)
			DNR (Z) (IND-3)	DNR (Z) II (IND-3)
				DNRZIII (IND-3)
IND-4	Deep Tread		HARBOUR4A (IND-4)	HARBOUR4PRO (IND-4)
			RSS (IND-4)	IS (IND-4)
			SD&R II (IND-4)	SS (IND-4)
			SMLS (IND-4)	SXMH (IND-4)
			IM (IND-4)	HM-HT (IND-4)
			TUP408	TUP420
IND-5	Extra Deep Tread		SS (IND-5)	HM (IND-5)

**Load and Inflation Pressure Table For Some OTR Tires
in Harbour and Industrial Services (For Ground Grading)**





Tire Size	P. R./ Load Speed Index	Inflation KPa	Static	Creep	Tire load limits at various speed (Kg)				
					4km/h	10km/h	15km/h	20km/h	25km/h
12.00-20	20	1000	11000	9850	8900	8300	8000	7800	7650
12.00-24	20	1000	12400	11000	10000	9300	8950	8750	8600
	24	1175	13500	12000	10850	10100	9750	9500	9350
12.00R24	178A5	1000	13500	11250	10125	9000	8025	7800	7500
14.00-24	24	1020	17100	15200	13750	12800	12350	12050	11850
	28	1100	18000	16000	14500	13500	13000	12700	12500
	32	1250	19600	17400	15800	14700	14100	13800	13600
14.00R24	193A5	1000	20700	17250	15525	13800	12305	11960	11500
16.00-25	28	900	20700	18400	16650	15500	14950	14600	14350
	32	1050	22500	20000	18100	16850	16250	15850	15600
	36	1175	24500	21700	19700	18400	17700	17300	17000
18.00-25	40	1150	30600	27200	24650	22950	22100	21600	21250
	42	1150	31500	28000	25350	23600	22750	22200	21850
	44	1250	32400	28800	26100	24300	23400	22800	22500
18.00-33	36	1025	33300	29600	26800	24900	24000	23500	23100
	40	1150	35100	31200	28200	26300	25300	24700	24300
	44	1050	37000	32900	29800	27800	26700	26100	25700
21.00-25	40	1100	39200	34800	31600	29400	28300	27600	27200
	42	1000	43700	38800	35200	32800	31500	30800	30300
	44	1050	44450	39500	35800	33300	32100	31350	30850
21.00-35	40	1100	45000	40000	36200	33700	32500	31700	31200
	42	990	31100	27600	25000	23300	22400	21900	21600
	44	900	47300	42050	38100	35500	34200	33400	32850
24.00-29	42	1020	56700	50400	45600	42500	40900	40000	39300
	48	1050	67500	60000	54300	50600	48700	47600	46800
280/75R22.5	163A8	1000	7840	7560	7280	6700	6560	6385	6300
310/80R22.5	175A8	1000	9660	9315	8970	8280	8080	7870	7760

NOTES:

1. The load of steering tires on forklift will be 80% of that show in the above table.
2. Please consult rim factory for rim strength.
3. Please consult our Tech. Dept. for any uncertainty.

ALL CATALOGUES

AG | Forestry | R-OTR | B-OTR | PORT | SAND

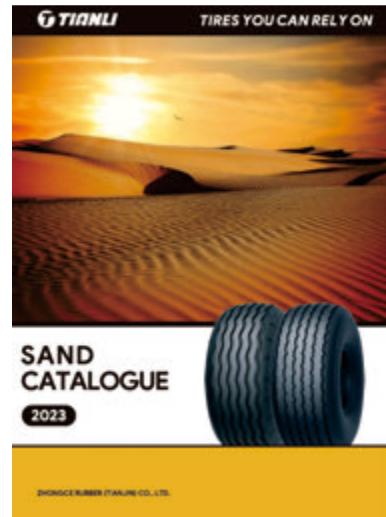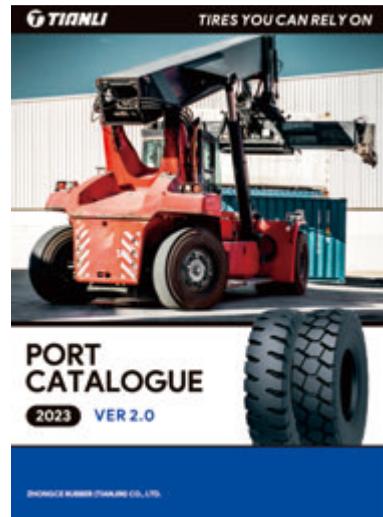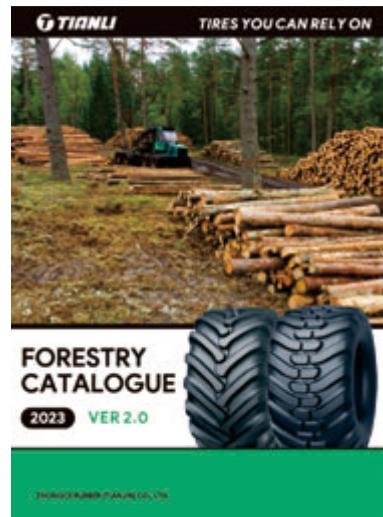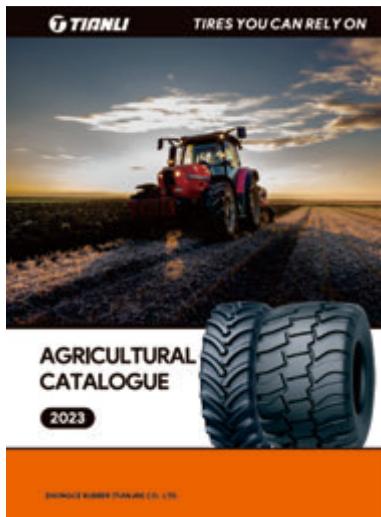

TIANLI

Service guarantee

The sales service network of TIANLI extends the major provinces and cities across China and more than 100 countries worldwide. In the meantime, TIANLI provides customization and one-stop tire solutions to our customers.



- One stop supply of more than 2000 SKU+ off highway tires
- OEM fitment by many international machines
- More than 35 years experience in research and development
- Listed No. 8 in global tire manufacturer ranking

● Tel: +86-22-23022731/23022732

● Web: www.tianli-tyre.com

● Add: No. 347 Hanjiang Road, Lingang Economic Zone, Binhai New District, Tianjin, China