




# **FRC Team 972**

## **"Donk"**

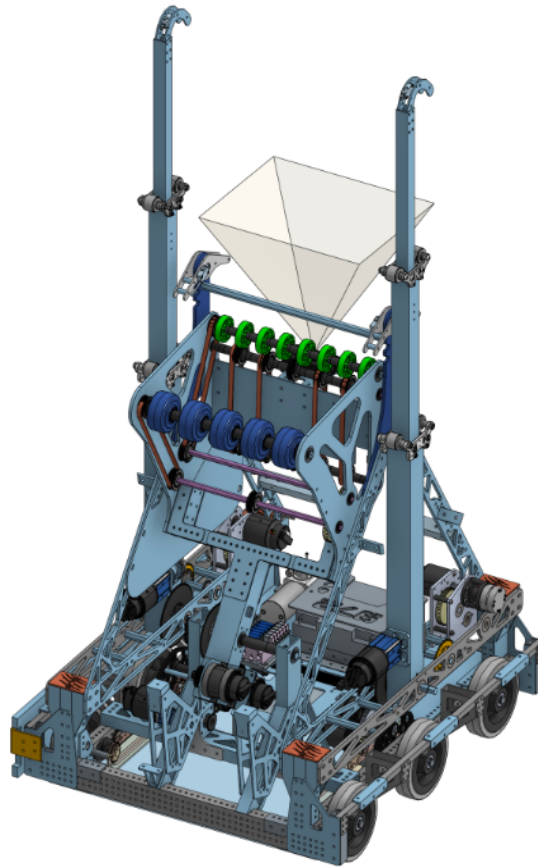

**Weight:** 111.1 lbs  
**Starting Height:** 39.1"

**Frame Perimeter:** 114"  
**Max Height:** 59.4"

# Strategy

Donk climbs to the mid rung and primarily scores in the low hub, but it will play defense if necessary.

## Autonomous (15 sec)


- Drive off tarmac
- Score 1 cargo into low hub

## Tele-Operated (1 min 45 sec)


- Consistently score into low hub from anywhere in tarmac
- Cycle: travel to ball, intake, rotate to hub, outtake into low hub
- Estimate 12-16 second cycle
  - Based on location of the balls, based on hub's exits
  - Score up to 8 cargo per game, assuming endgame climb
- Play defense as needed (pin robots, shoot opponent balls away etc.)

## Endgame (30 sec)

- Climb to mid rung
- Continue scoring cargo as needed

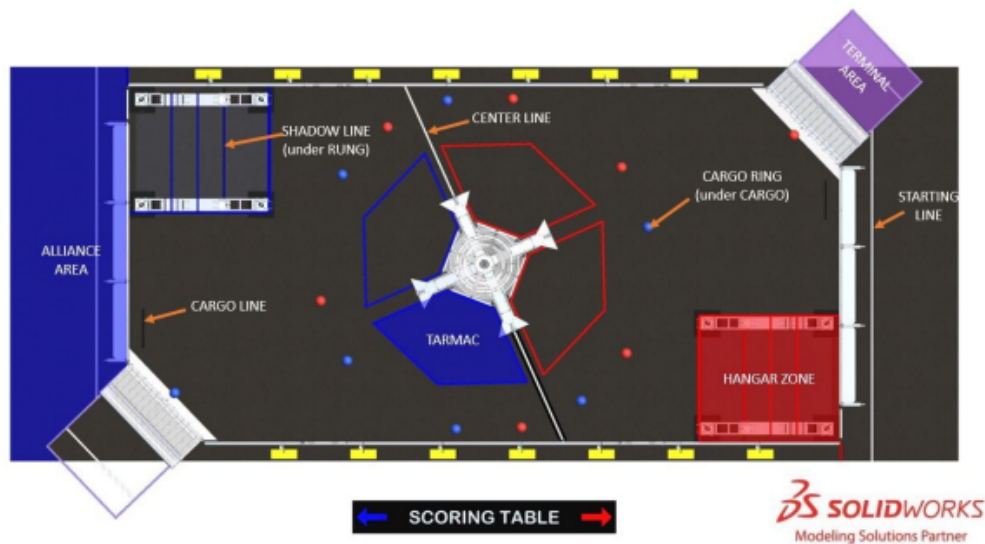

# Drivetrain

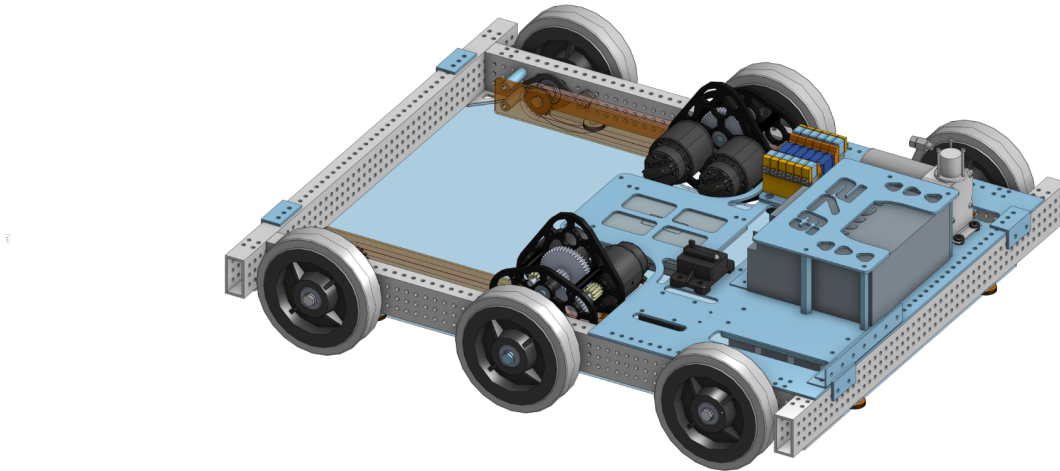

The robot uses a standard West Coast Drivetrain with six 6" Colson wheels and a compact rectangular chassis.

## West Coast Drive

- 6" Colson wheels to combat defense
- 0.0625" center drop for easier turning
- WCP Snail Gears to maintain tension in the the chains

## Chassis


- 27" x 30" chassis
- 0.5" hole pattern for easy superstructure mounting
- Spacious electronics layout
- 0.125" wall 2x1 tubing to keep CG low and increase strength
- Compact for maneuverability
- Allows space for other robots climbing on the hanger
- Acrylic guards to protect electrical board against chain

## Gearbox

- Max Speed of 12.03 ft/sec
- 4 Falcon 500s allow for an extremely powerful and efficient drivetrain

# Intake/Shooter Claw

(a.k.a the “Mushroom”)

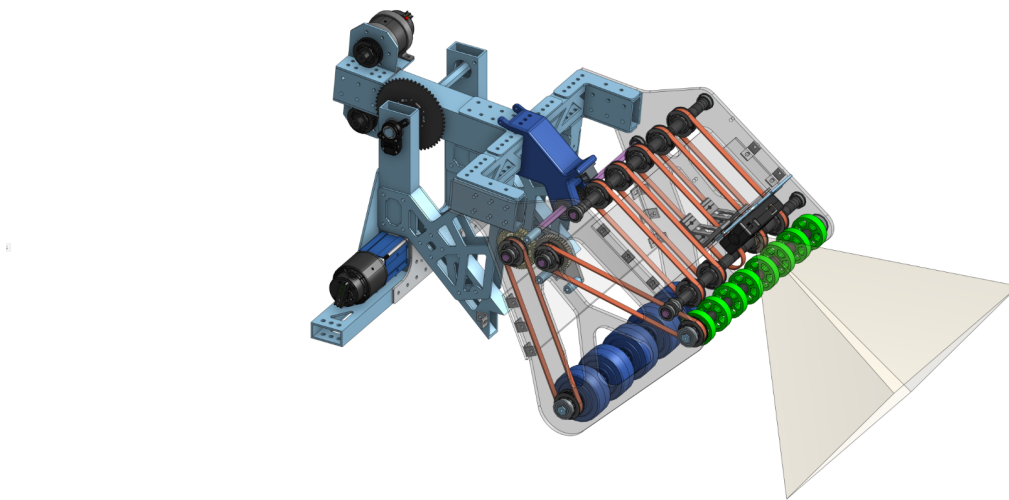

This combined intake/shooter claw flips forward to intake cargo from the ground and rotates to any angle for shooting into the low hub. Two bars of rollers intake and shoot the balls while indexing belts keep the cargo in place while the shooter spins up.

## Pivot

- Stowed, intake, and various shooting positions
- Hard stops with nitrile tread on each side
- Powered by a Falcon 500 with a 144:1 gear ratio
- Rotates 175°
- REV through-bore absolute encoder to assist in PID


## Rollers

- One roller with eight 35A durometer 2” compliant wheels
- One roller with five 3” Colson wheels
- Powered by a Falcon 500

## Belt Indexers

- Five belts keep cargo in claw and pushes them into shooting wheels
- Powered by a Falcon 500 with a 1:1 gear ratio
- Color Sensor determines presence and color of intaked cargo

# Climb

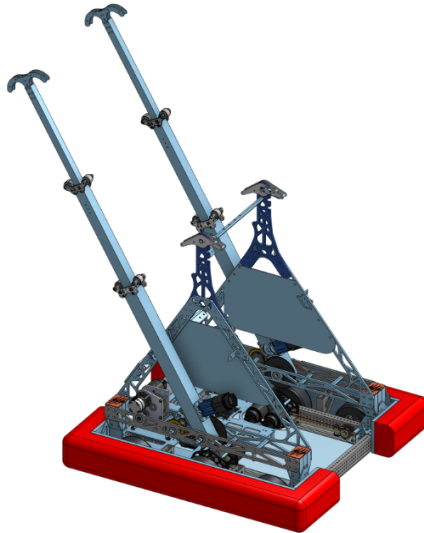

Rotating telescoping arms from ThriftyBot with a hook mounted on top designed to reach up to the mid bar from the ground and to high bar while spring-loaded hooks mounted to superstructure are latched.

## Rotation

- Powered by a Falcon 500 on each side with a 170:1 gear ratio
- REV through-bore encoder to measure absolute position for PID control

## Telescoping Arms

- Three-stage telescoping arms from ThriftyBot with modification
- Extends with constant-force springs, retracts with Kevlar cord around spool
- Powered by a Falcon 500 on each side with a 20:1 gear ratio


## Superstructure

- Pocketed holes for weight reduction and cable tie mounting points
- Cross bar to maintain stability and mount dual driver cameras

## Static Hooks

- Pass through the bar while ascending and latch on
- Hard stops cutouts for hooks to lay flush
- Modular design allows for hooks to be swiftly removed and replaced

# Electrical

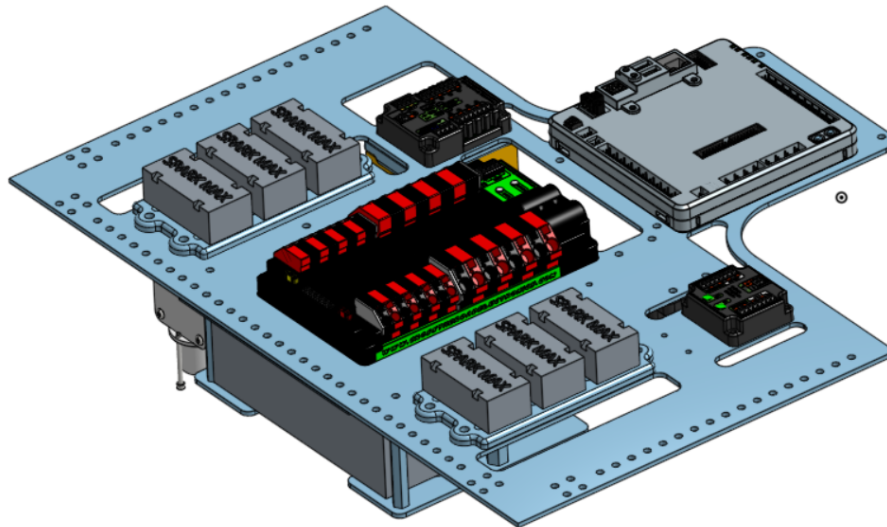

The Electrical Board is flipped for ease of inspection, serviceability, and clearance. Most electrical components are placed on the underside so that they may be easily accessed as the robot is on its side. An additional polycarbonate sheet is attached on the superstructure for commonly accessed and visible components.

## **Flipped Electrical Board**

- Electronics on the underside and reduced size allow for more mounting space and clearance
- RoboRIO, PDP, VRM, and PCM accessible with the robot on its side
- Large 0.125" polycarbonate sheet protects electronics from debris


## **Battery Holder**

- Battery can be easily slip in from the back
- Straps with buckles along with a removable bracket hold the battery in place

## **Polycarbonate Board**

- Bridge and RSL are visible
- Robot USB port and breaker are accessible, but protected from projectiles

# Computer Vision

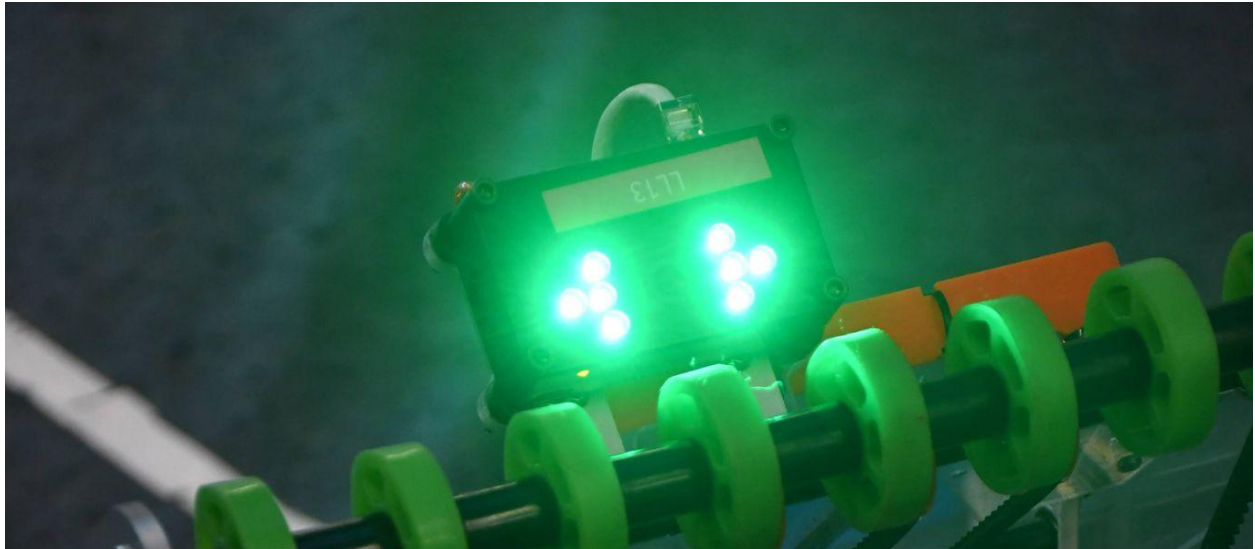

A Limelight 2+ mounted on top of the intake/shooter claw allows for a dynamic range of views ( $59.6^\circ \times 49.7^\circ$ ) to assist in semi-autonomous intaking and automatically returns the shooter wheel velocity from the distance to the retro-reflective tape on the high hub. Additionally, it is useful for alignment for climbing.

## Ball-Tracking

- Large view of ground with claw flipped out
- Artificially increases acquisition zone
- Automatically turns towards and approaches cargo of appropriate color

## Shooting

- Shoots from anywhere within tarmac
- Automatically calculates optimal shooting speed