


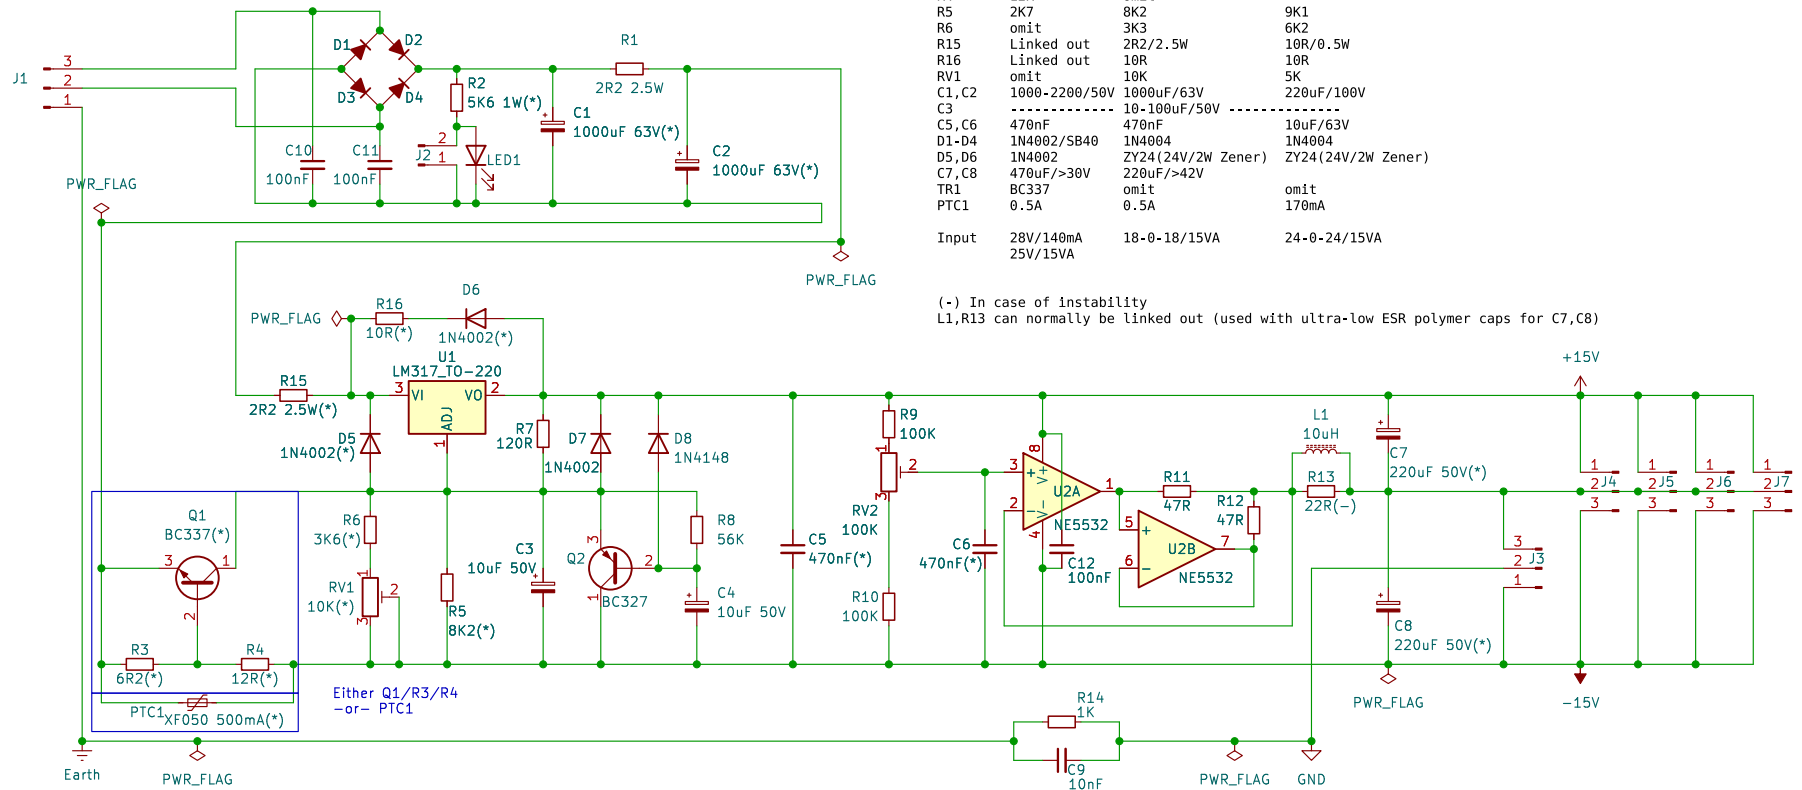

(*) Depends on voltage

R2	LV(15-0-15V)	HV(21-0-21V)	Phantom(48V)
R3	3K3	5K6	9K1
R4	6R2	omit	
R5	12R	omit	
R6	2K7	8K2	9K1
R15	Linked out	2R2/2.5W	10R/0.5W
R16	Linked out	10R	10R
RV1	omit	10K	5K
C1,C2	1000-2200/50V	1000uF/63V	220uF/100V
C3	-----	10-100uF/50V	-----
C5,C6	470nF	470nF	10uF/63V
D1-D4	1N4002/SB40	1N4004	1N4004
D5,D6	1N4002	ZY24 (24V/2W Zener)	ZY24 (24V/2W Zener)
C7,C8	470uF/>30V	220uF/>42V	
TR1	BC337	omit	omit
PTC1	0.5A	0.5A	170mA
Input	28V/140mA 25V/15VA	18-0-18/15VA	24-0-24/15VA

(-) In case of instability

L1,R13 can normally be linked out (used with ultra-low ESR polymer caps for C7,C8)

Sheet: /
File: AudioPowerSupply.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.0

Rev:

Id: 1/1