Assignment-3 of CSE405

Computer Networks

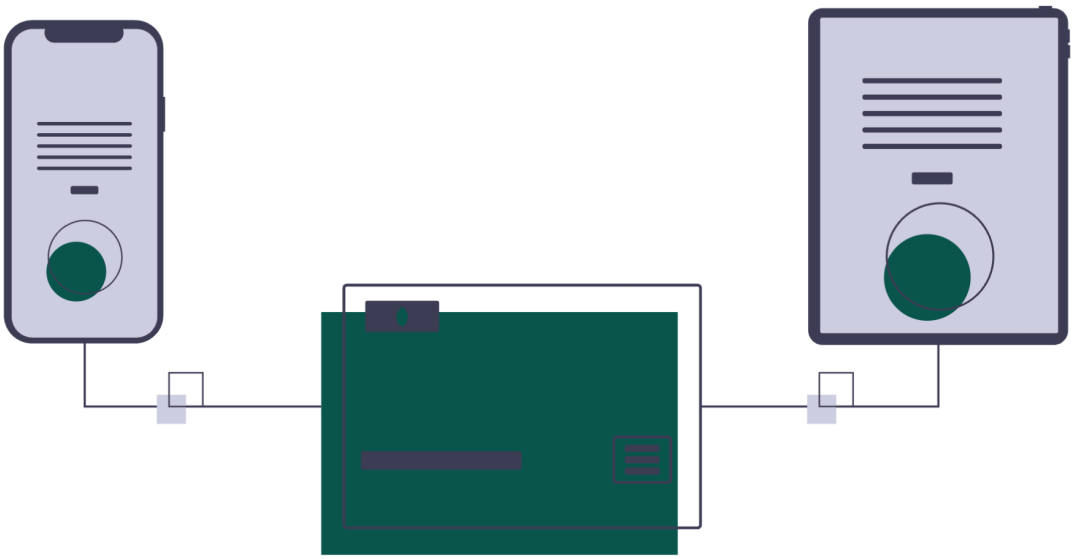

Submitted By:

Aklhak Hossain
2022-3-60-057
https://akhlak.com

Submitted To:

Md. Khalid Mahbub Khan
Senior Lecturer
Department of CSE
East West University

Diagram: **3**
Router Configuration: **3**
R0: 3
R1: 3
R2 4
R3 4
Routing Protocol **5**
R0: 5
R1: 5
R2: 5
R3: 6

Diagram:

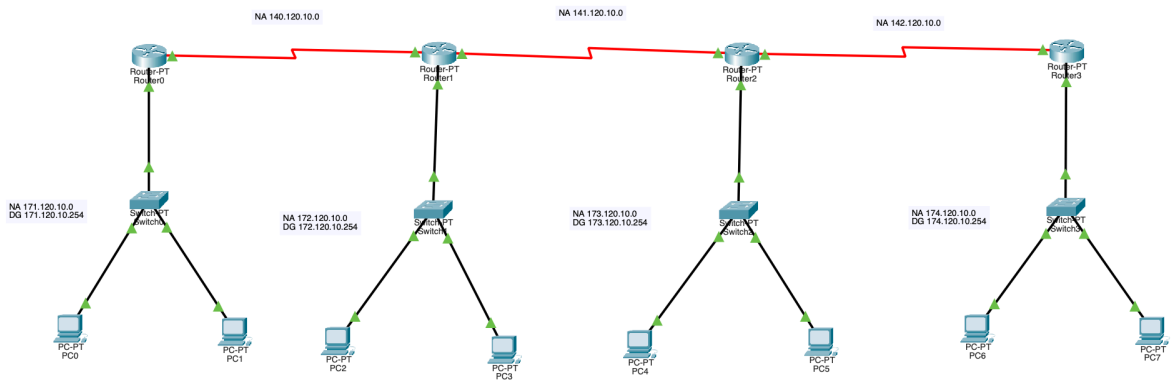

Router Configuration:

R0:

```
enable
config
interface fa0/0
ip address 171.120.10.254 255.255.0.0
no shut
do wr
exit
interface se2/0
ip address 140.120.10.1 255.255.0.0
clock rate 64000
no shut
do wr
exit
```

R1:

```
enable
config
interface fa0/0
ip address 172.120.10.254 255.255.0.0
no shut
```

```
do wr
exit
interface se2/0
ip address 141.120.10.1 255.255.0.0
clock rate 64000
no shut
do wr
exit
interface se3/0
ip address 140.120.10.2 255.255.0.0
no shut
do wr
exit
```

R2

```
enable
config
interface fa0/0
ip address 173.120.10.254 255.255.0.0
no shut
do wr
exit
interface se2/0
ip address 142.120.10.1 255.255.0.0
clock rate 64000
no shut
do wr
exit
interface se3/0
ip address 141.120.10.2 255.255.0.0
no shut
do wr
exit
```

R3

```
enable
config
interface fa0/0
```

```
ip address 174.120.10.254 255.255.0.0
no shut
do wr
exit
interface se3/0
ip address 142.120.10.2 255.255.0.0
no shut
do wr
exit
```

Routing Protocol

RIP:

R0:

```
enable
config
router rip
network 140.120.10.1
network 171.120.10.0
exit
```

R1:

```
enable
config
router rip
network 172.120.10.0
network 140.120.10.2
network 141.120.10.1
exit
```

R2:

```
enable
config
router rip
network 173.120.10.0
```

```
network 141.120.10.2
network 142.120.10.1
exit
```

R3:

```
enable
config
router rip
network 174.120.10.0
network 142.120.10.2
exit
```