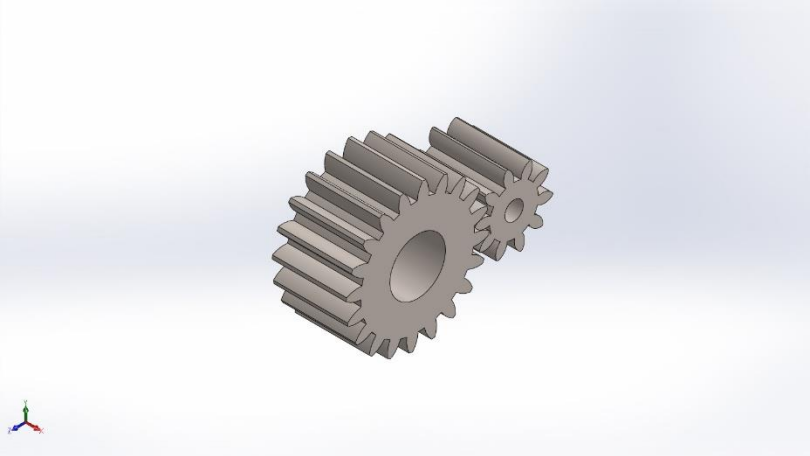

Simulation of Assem3

Date: 19 October 2020
Designer: Solidworks
Study name: Static 1
Analysis type: Static

Table of Contents

Description 1
Assumptions 2
Model Information 2
Study Properties 3
Units 3
Material Properties 4
Loads and Fixtures 5
Connector Definitions 5
Contact Information 6
Mesh information 7
Sensor Details 8
Resultant Forces 8
Beams 9
Study Results 10
Conclusion 12

Description

No Data

Assumptions

Model Information

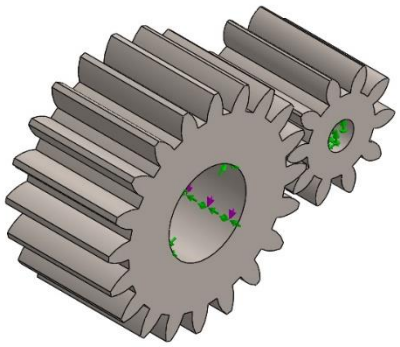

Model name: Assem3
Current Configuration: Default

Solid Bodies

Document Name and Reference	Treated As	Volumetric Properties	Document Path/Date Modified
Bore 	Solid Body	**Mass:1.9887 kg** **Volume:0.000258273 m^3** **Density:7700 kg/m^3** **Weight:19.4893 N**	**c:\solidworks data\browser\iso\power transmission\gears\spur gear_iso.sldprt** Oct 19 23:25:58 2020
Bore 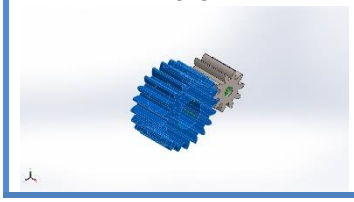	Solid Body	**Mass:7.4208 kg** **Volume:0.000963741 m^3** **Density:7700 kg/m^3** **Weight:72.7239 N**	**c:\solidworks data\browser\iso\power transmission\gears\spur gear_iso.sldprt** Oct 19 23:25:58 2020

Study Properties

Study name	Static 1
Analysis type	Static
Mesh type	Solid Mesh
Thermal Effect:	On
Thermal option	Include temperature loads
Zero strain temperature	298 Kelvin
Include fluid pressure effects from SOLIDWORKS Flow Simulation	Off
Solver type	FFEPlus
Inplane Effect:	Off
Soft Spring:	Off
Inertial Relief:	Off
Incompatible bonding options	Automatic
Large displacement	Off
Compute free body forces	On
Friction	Off
Use Adaptive Method:	Off
Result folder	SOLIDWORKS document (c:\users\ashiss~1\appdata\local\temp)

Units

Unit system:	SI (MKS)
Length/Displacement	mm
Temperature	Kelvin
Angular velocity	Rad/sec
Pressure/Stress	N/m^2

Material Properties

Model Reference	Properties		Components
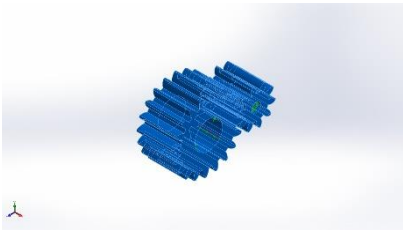	**Name:**	Alloy Steel	SolidBody 1(Bore)(spur gear_iso-1), SolidBody 1(Bore)(spur gear_iso-2)
	Model type:	Linear Elastic Isotropic	
	Default failure criterion:	Max von Mises Stress	
	Yield strength:	6.20422e+008 N/m^2	
	Tensile strength:	7.23826e+008 N/m^2	
	Elastic modulus:	2.1e+011 N/m^2	
	Poisson's ratio:	0.28	
	Mass density:	7700 kg/m^3	
	Shear modulus:	7.9e+010 N/m^2	
	Thermal expansion coefficient:	1.3e-005 /Kelvin	
Curve Data:N/A			

Loads and Fixtures

Fixture name	Fixture Image	Fixture Details
Fixed-1	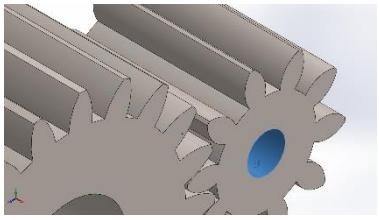	**Entities:** 1 face(s) **Type:** Fixed Geometry

Resultant Forces

Components	X	Y	Z	Resultant
Reaction force(N)	-1.01412e-005	14.1217	5.5544	15.1748
Reaction Moment(N.m)	0	0	0	0

Fixture name	Fixture Image	Fixture Details
Fixed Hinge-1	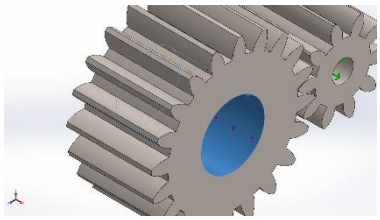	**Entities:** 1 face(s) **Type:** Fixed Hinge

Resultant Forces

Components	X	Y	Z	Resultant
Reaction force(N)	-2.50188e-006	-14.1212	-5.55438	15.1743
Reaction Moment(N.m)	0	0	0	0

Load name	Load Image	Load Details
Torque-1	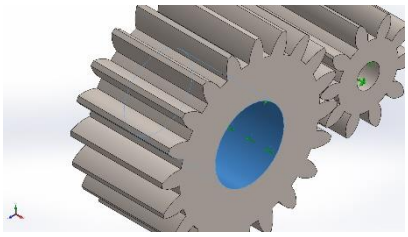	**Entities:** 1 face(s) **Type:** Apply torque **Value:** 1 N.m

Connector Definitions

No Data

Contact Information

Contact	Contact Image	Contact Properties
Global Contact	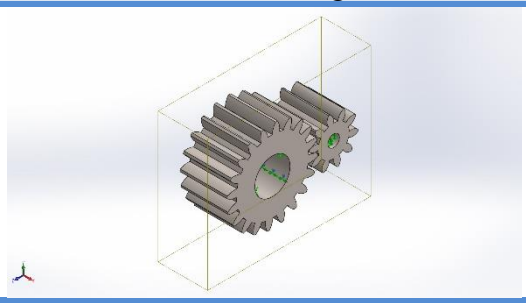	**Type:** No penetration (Surface to surface) **Components:** 1 component(s)

Mesh information

Mesh type	Solid Mesh
Mesher Used:	Standard mesh
Automatic Transition:	Off
Include Mesh Auto Loops:	Off
Jacobian points	4 Points
Element Size	0.534678 cm
Tolerance	0.0267339 cm
Mesh Quality Plot	High
Remesh failed parts with incompatible mesh	Off

Mesh information - Details

Total Nodes	80612
Total Elements	51958
Maximum Aspect Ratio	7.2037
% of elements with Aspect Ratio < 3	98.8
% of elements with Aspect Ratio > 10	0
% of distorted elements(Jacobian)	0
Time to complete mesh(hh;mm;ss):	00:00:09
Computer name:	

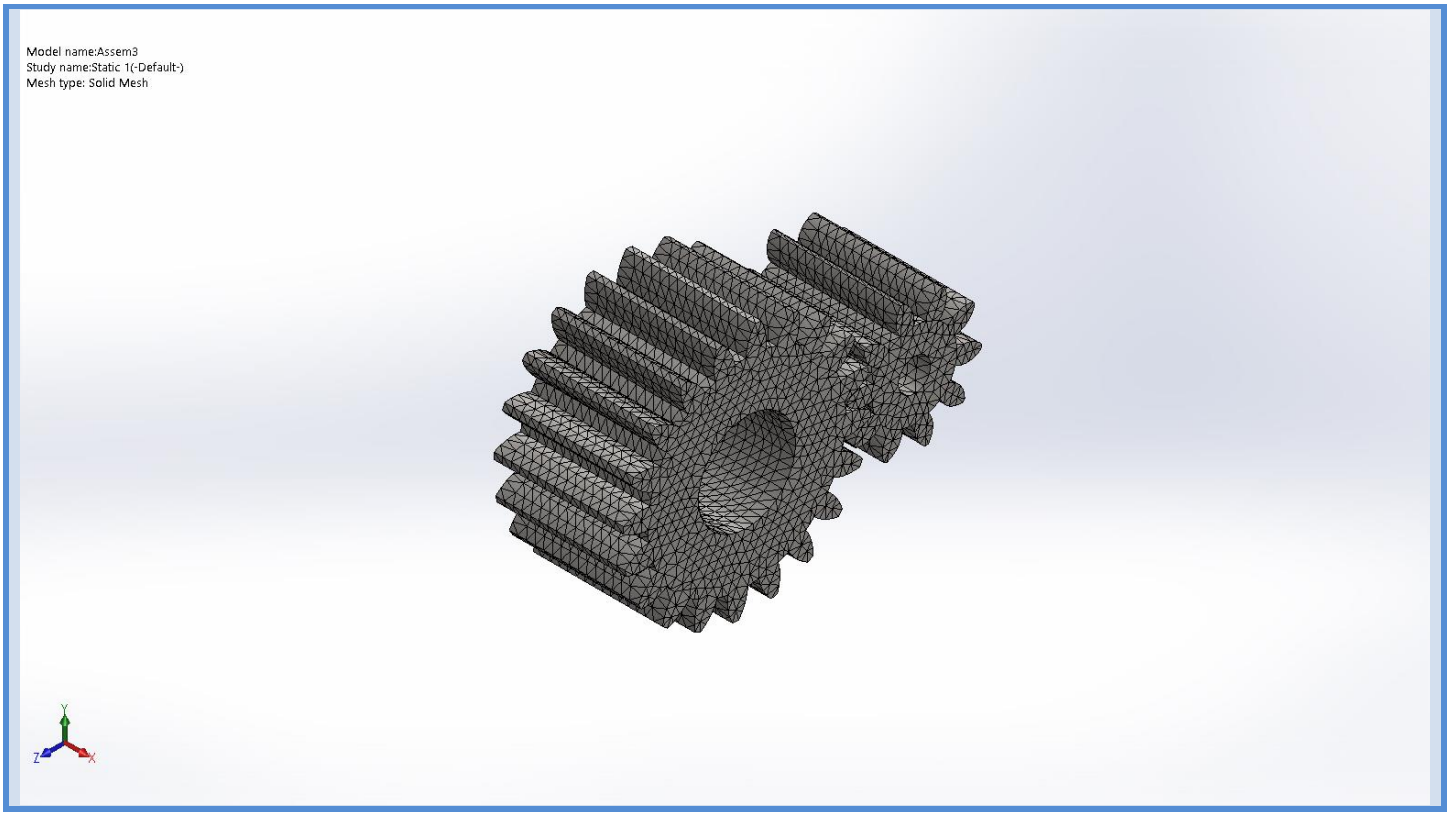

Sensor Details

No Data

Resultant Forces

Reaction forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	-1.26347e-005	0.000445342	2.76444e-005	0.000446378

Reaction Moments

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	0

Beams

No Data

Study Results

Name	Type	Min	Max
Stress1	VON: von Mises Stress	3.870e-001N/m^2 Node: 185	8.772e+004N/m^2 Node: 77210

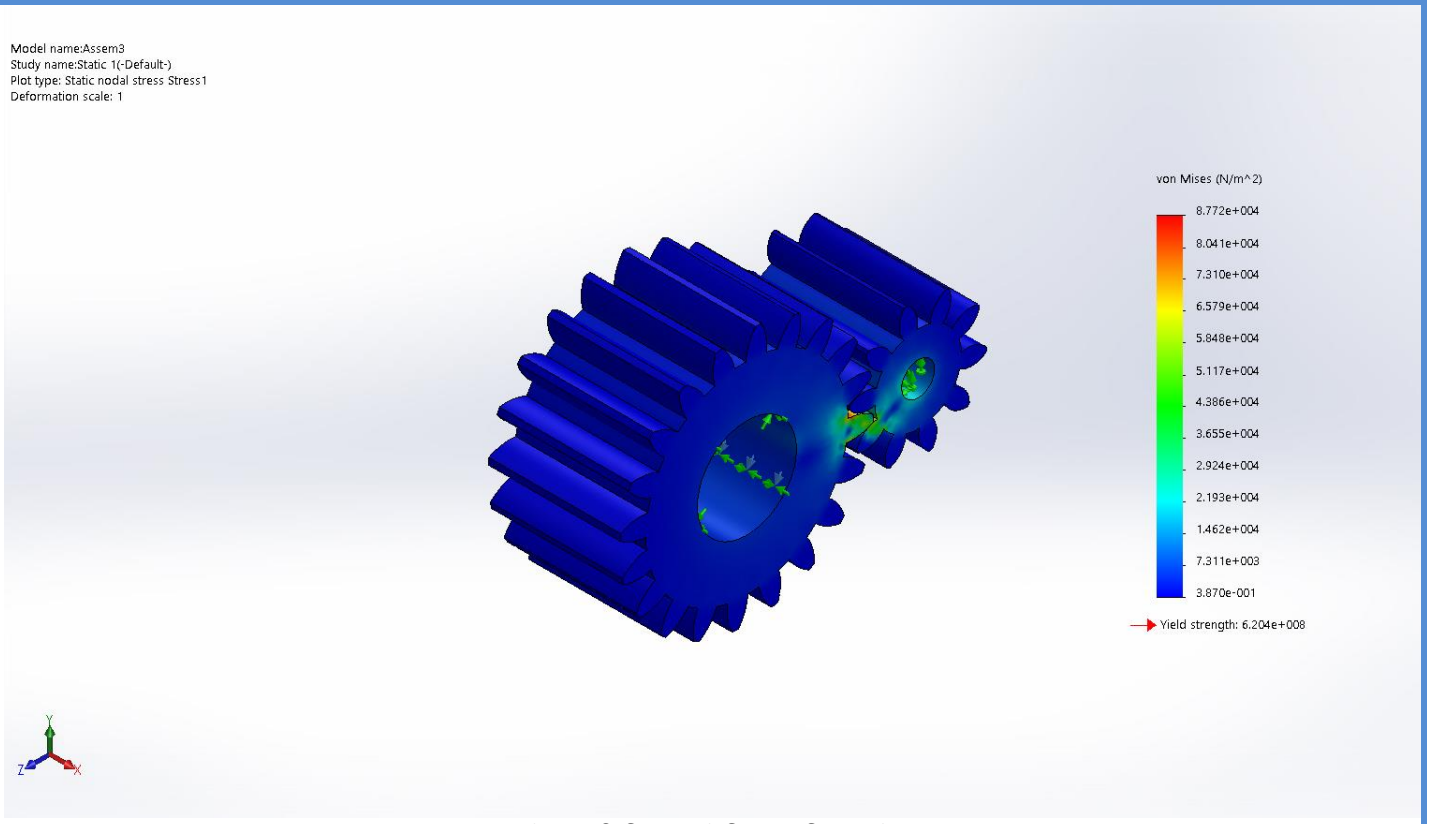

Assem3-Static 1-Stress-Stress1

Name	Type	Min	Max
Displacement1	URES: Resultant Displacement	0.000e+000mm Node: 1	2.317e-005mm Node: 73765

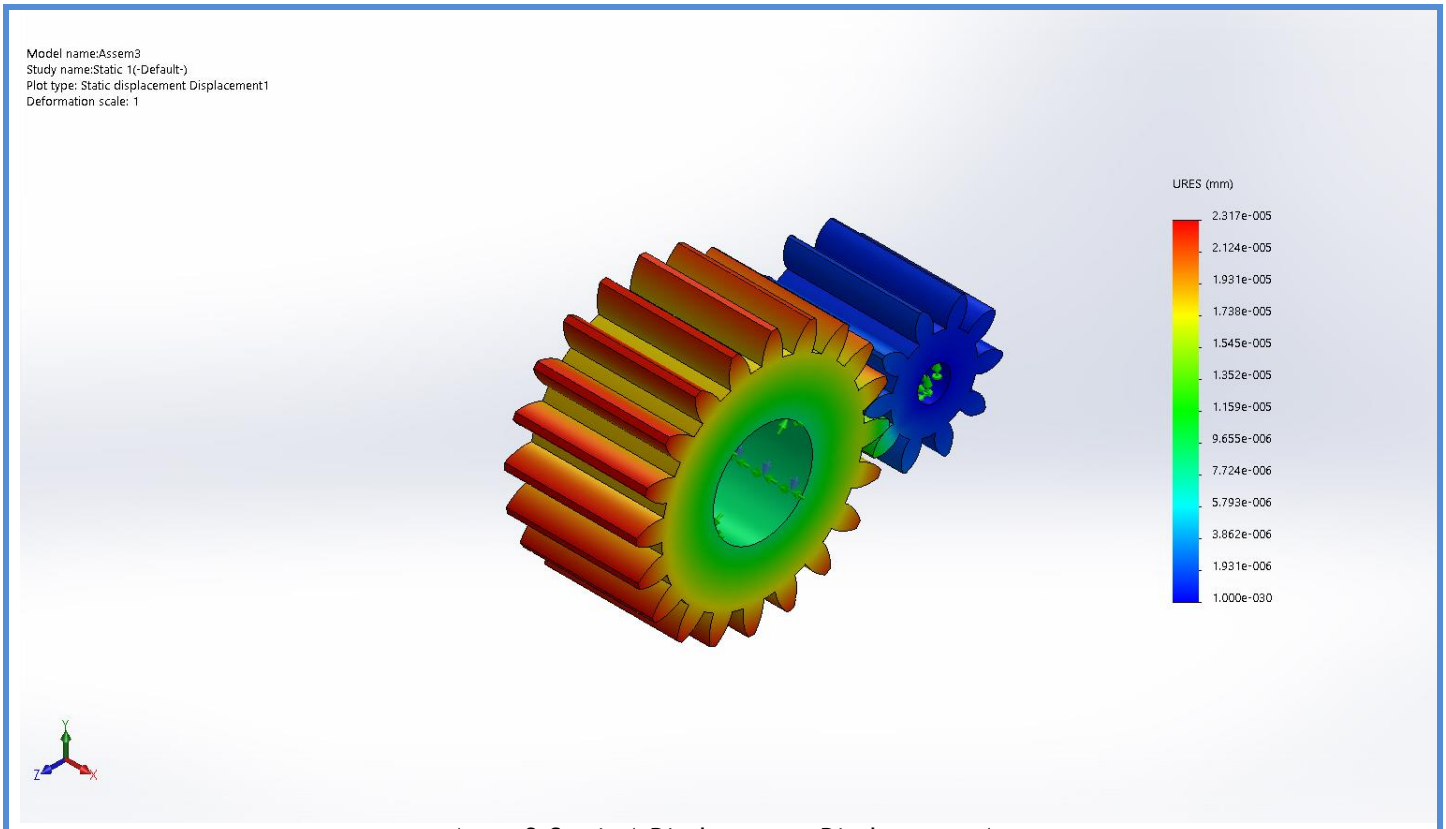

Assem3-Static 1-Displacement-Displacement1

Name	Type	Min	Max
Strain1	ESTRN: Equivalent Strain	1.416e-012 Element: 3312	3.066e-007 Element: 19770

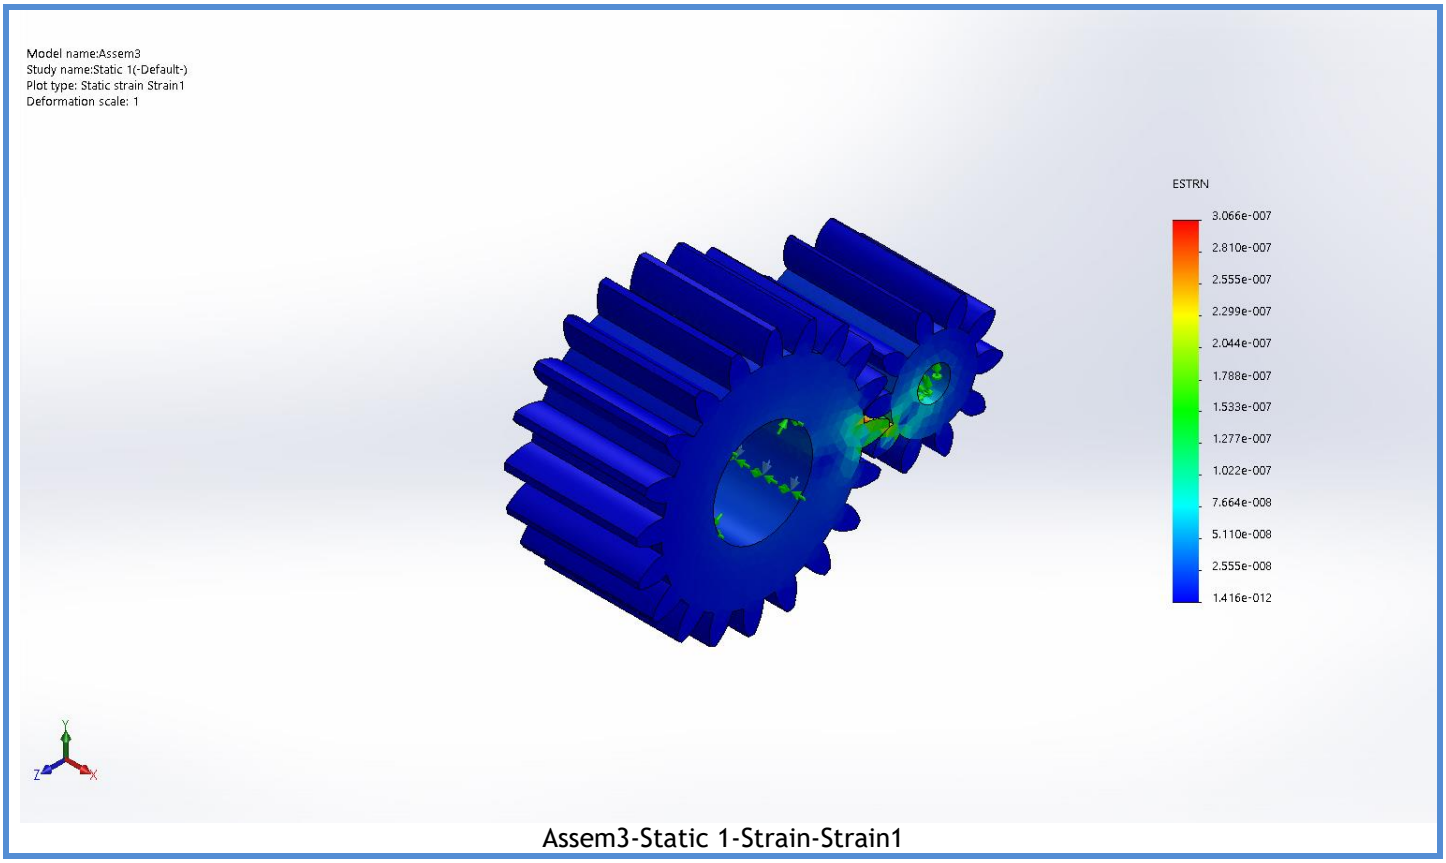

Assem3-Static 1-Strain-Strain1

Conclusion