


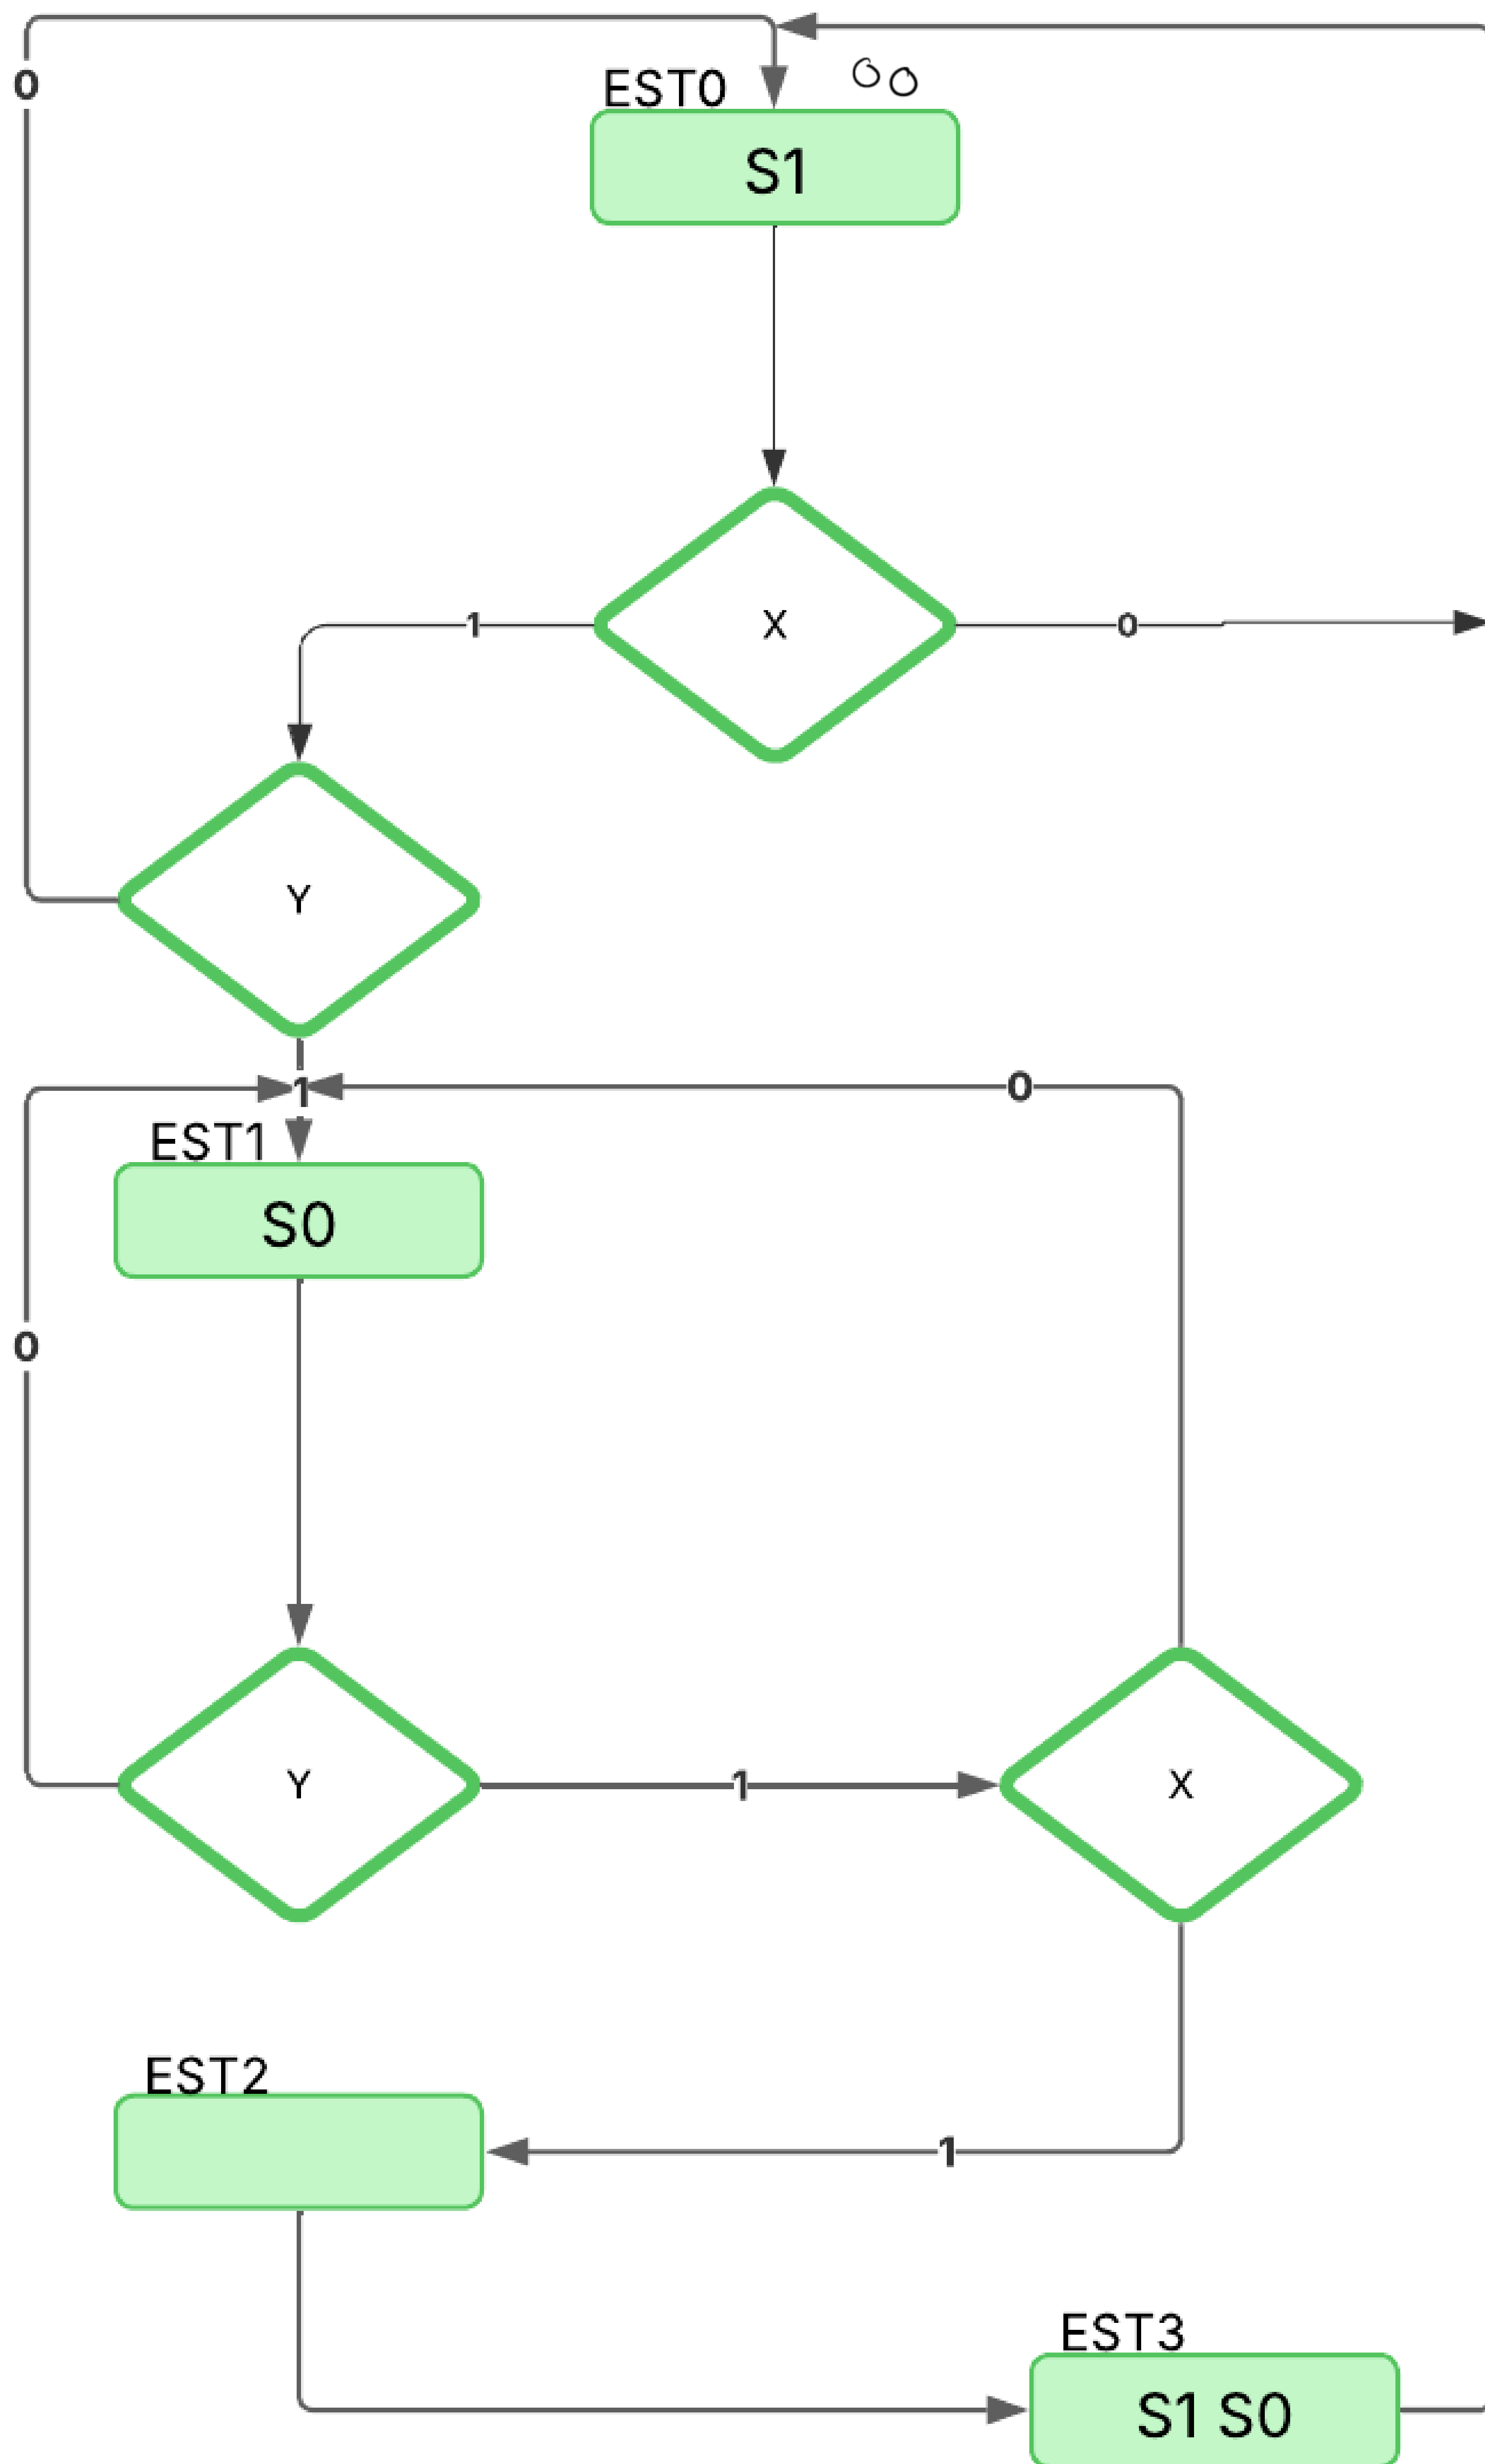

Estado Presente	Entradas	Estado Siguiente	Salidas
Q, Q_0	x, y	Q, Q_0	S_1, S_0
EST0 00	0 *	EST0 00	1 0
EST0 00	1 0	EST0 00	1 0
EST0 00	1 1	EST1 01	1 0
EST1 01	* 0	EST1 01	0 1
EST1 01	0 1	EST1 01	0 1
EST1 01	1 1	EST2 10	0 1
EST2 10	* *	EST3 11	0 0
EST3 11	1 *	EST0 00	1 1

Mapas:

$Q, Q_0 / x, y$ 00 01 11 10

00

01

11

10

		1	
1	1	1	1

$$D_1 = Q_1 \bar{Q}_0 + \bar{Q}_1 Q_0 x y$$

$Q, Q_0 / x, y$ 00 01 11 10

00

01

11

10

		1	
1	1		1
1	1	1	1

$$D_0 = Q_1 \bar{Q}_0 + \bar{Q}_1 Q_0 x y$$

$$+ \bar{Q}_1 Q_0 \bar{x}$$

$$+ \bar{Q}_1 Q_0 \bar{y}$$

$Q, Q_0 / x, y$

00 01 11 10

00

01

11

10

1	1	1	1
1	1	1	1

$$S_1 = \bar{Q}_1 \bar{Q}_0 + Q_1 Q_0$$

$Q, Q_0 / x, y$

00 01 11 10

00

01

11

10

1	1	1	1
1	1	1	1

$$S_2 = Q_0$$