G2G LIGHTING

Creating a Greener World

CHANNEL LETTER
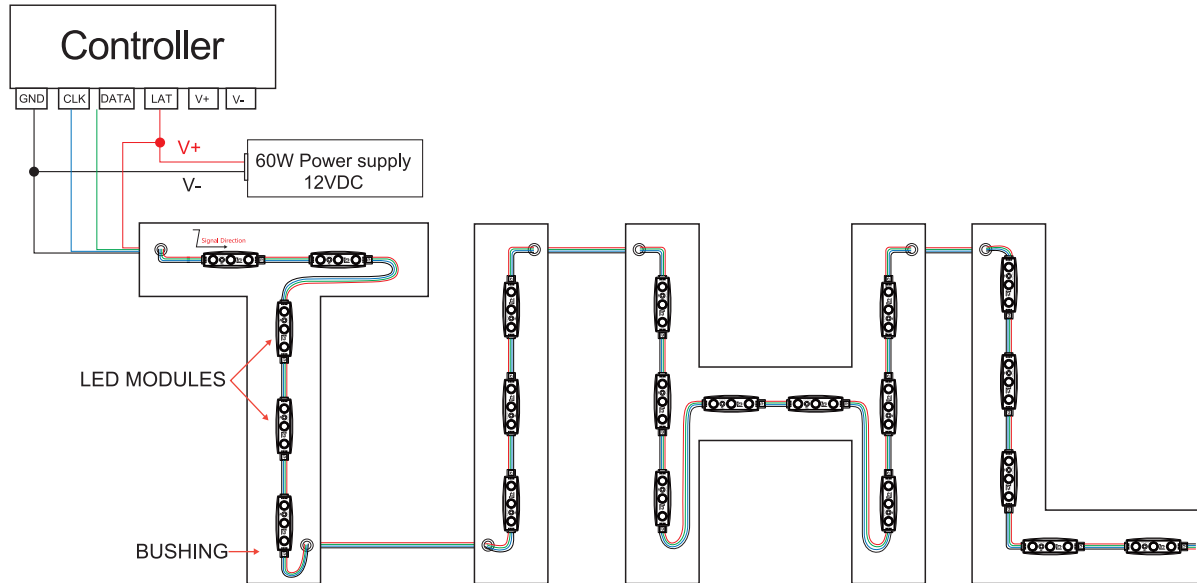# LIGHTING
INSTALLATION GUIDE
G2G TriCo Series

CHANNEL LETTER
LED LIGHTING

CHANNEL LETTER
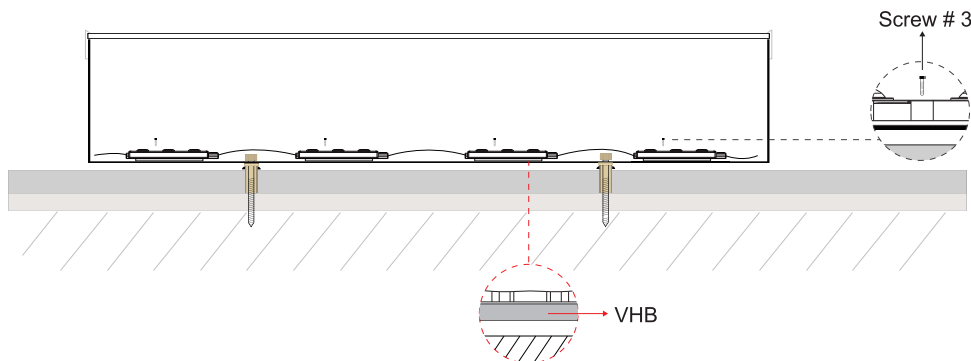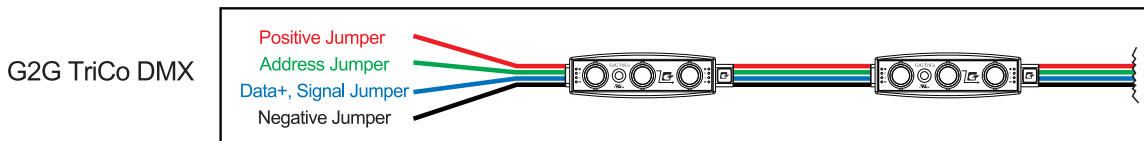## LED LIGHTING

Clean rewrite below.

CHANNEL LETTER
LED LIGHTING

INSTALLATION INSTRUCTIONS

Install length of product in letters by fastening mounting clips with VHB tape(supplied) of mechanically through holes in the clip, or both.Add silicone for additional security if desired (see Figure 2)

Controller — GND CLK DATA LAT V+ V-

V+
60W Power supply 12VDC
V-

Signal Direction

LED MODULES

BUSHING

Wiring and installation diagram

G2G TriCo

Positive Jumper
Data Jumper
Clock Jumper
Negative Jumper

G2G TriCo DMX

Positive Jumper
Address Jumper
Data+, Signal Jumper
Negative Jumper

Screw # 3

VHB

G2G LIGHTING

1829 Underwood Blvd, Unit 5, Delran Twp, NJ 08075
T 973-575-2600   F 973-575-2603

ALL COMPONENTS cRUus
www.g2glighting.com

POWER SUPPLY LOADS

LED Module	PCS / FT (60W)
G2G TriCo	83/42
G2G TriCo DMX	83/42

G2G TRICO
WIRING DIAGRAM CONTROLLER

Please Note: the direction of the line connection
To connect the wire along the direction of the arrow

Please Note: the direction of the line connection
To connect the wire along the direction of the arrow

G2G LIGHTING

1829 Underwood Blvd, Unit 5, Delran Twp, NJ 08075
T 973-575-2600   F 973-575-2603

ALL COMPONENTS c UL us
www.g2glighting.com

G2G TRICO DMX
WIRING DIAGRAM CONTROLLER

Use the same way to wire the OUT 3 to OUT 8

Talent I Master

Talent I Slave

110VAC

LINK A
LINK B

OUT 8
OUT 7
OUT 6
OUT 5
OUT 4
OUT 3
OUT 2
OUT 1

60W Power supply 12VDC

V- V+

Signal Direction

60pcs modules

G2G TriCo DMX Wires instruction
- Positive Jumper
- Address Jumper
- Data+, Signal Jumper
- Negative Jumper

Max of 300 Modules for each prot

Use a short wire connect the first port,
and connect with the black wire of module,
then connect to the negative of the power supply

Talent II

12V AC
DC: 7-30V, GND, 5V, GND
SIN: IN+, IN-
SOUT: GND, OUT+, OUT-
DMX1: GND, A, B, W
DMX2: GND, A, B, W
SPI1: GND, DATA, CLK
SPI2: GND, DATA, CLK

60W Power supply 12VDC

V- V+

Signal Direction

60pcs modules

G2G TriCo DMX Wires instruction
- Positive Jumper
- Address Jumper
- Data+, Signal Jumper
- Negative Jumper

Max of 300 Modules for each prot

Use a short wire connect the first port,
and connect with the black wire of module,
then connect to the negative of the power supply

Use the same way to wire the OUT 3 to OUT 7

Talent III

110VAC

LINK A
LINK B

OUT 8
OUT 7
OUT 6
OUT 5
OUT 4
OUT 3
OUT 2
OUT 1

60W Power supply 12VDC

V- V+

Signal Direction

60pcs modules

G2G TriCo DMX Wires instruction
- Positive Jumper
- Address Jumper
- Data+, Signal Jumper
- Negative Jumper

Max of 300 Modules for each prot

Use a short wire connect the first port,
and connect with the black wire of module,
then connect to the negative of the power supply