Computer Architecture

Spring 2020

Hamed Farbeh

farbeh@aut.ac.ir

Department of Computer Engineering

Amirkabir University of Technology

BASIC COMPUTER ORGANIZATION AND DESIGN

Outlines

- Instruction Codes
- Computer Registers
- Computer Instructions
- **Timing and Control**
- **Instruction Cycle**
- **Memory Reference Instructions**
- **Input-Output and Interrupt**
- **Complete Computer Description**
- **Design of Basic Computer**
- **Design of Accumulator Logic**

CONTROL UNIT

- **Control unit (CU) of a processor translates from machine instructions to the control signals for the microoperations that implement them**
- **Control units are implemented in one of two ways**
- ***Hardwired* Control**
  - **CU is made up of sequential and combinational circuits to generate the control signals**
- ***Microprogrammed* Control**
  - **A control memory on the processor contains microprograms that activate the necessary control signals**
- **We will consider a hardwired implementation of the control unit for the Basic Computer**

TIMING AND CONTROL

Control unit of Basic Computer

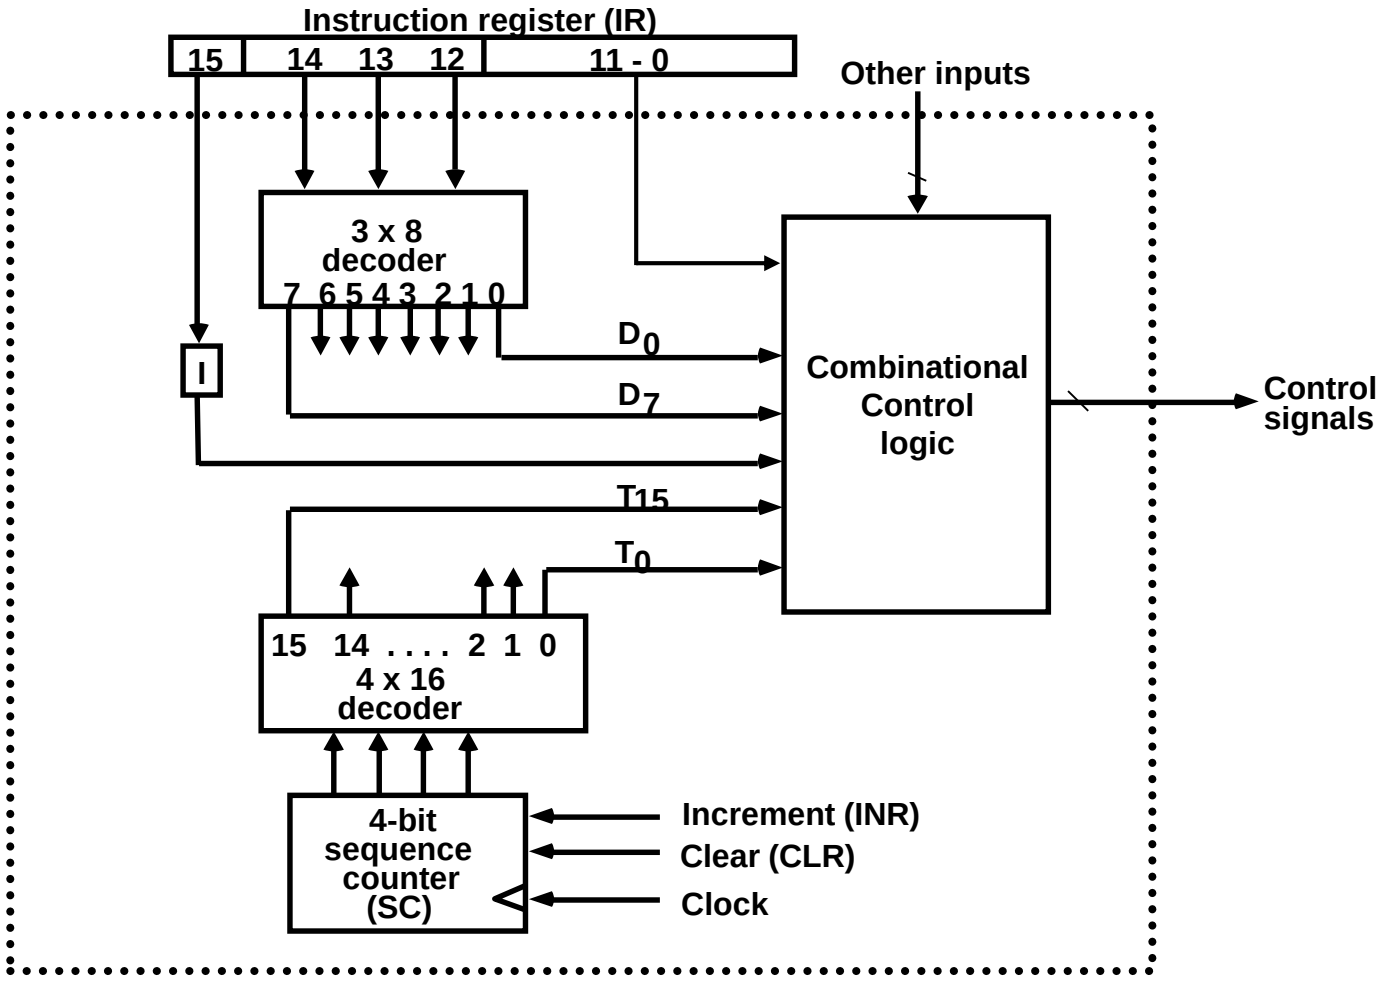

TIMING SIGNALS

- Generated by 4-bit sequence counter and 4×16 decoder
- The SC can be incremented or cleared.

- Example: $T_0, T_1, T_2, T_3, T_4, T_0, T_1, \ldots$

  Assume: At time T_4, SC is cleared to 0 if decoder output D3 is active.

D_3T_4: SC ←0

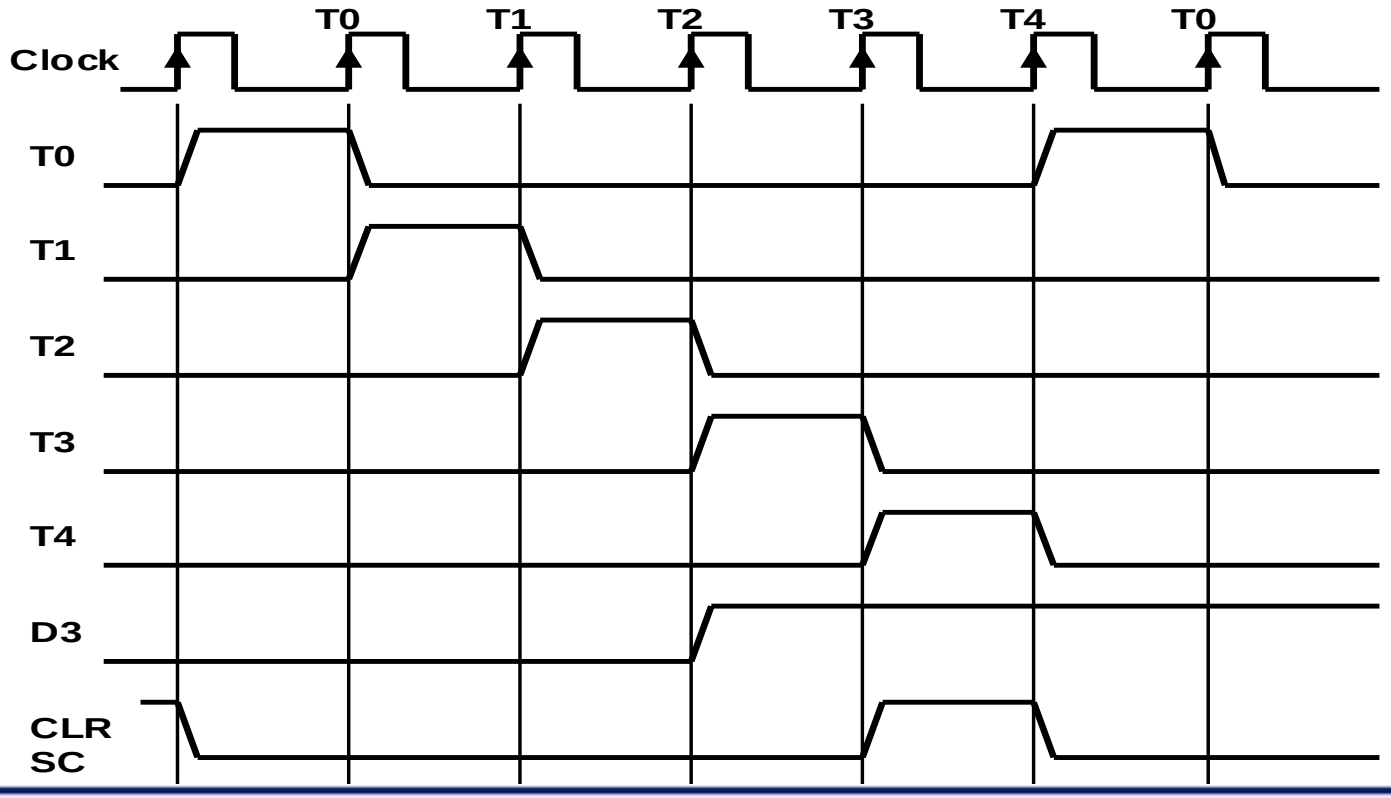

INSTRUCTION CYCLE

- **In Basic Computer, a machine instruction is executed in the following cycle:**
  1. **Fetch an instruction from memory**
  2. **Decode the instruction**
  3. **Read the effective address from memory if the instruction has an indirect address**
  4. **Execute the instruction**

- **After an instruction is executed, the cycle starts again at step 1, for the next instruction**

- ***Note*: Every different processor has its own (different) instruction cycle**

FETCH and DECODE

- **Fetch and Decode**

T0: AR ← PC ($S_0S_1S_2$=010, T_0=1)
T1: IR ← M [AR], PC ← PC + 1 ($S_0S_1S_2$=111, T_1=1)
T2: D0, . . . , D7 ← Decode IR(12-14), AR ← IR(0-11), I ← IR(15)

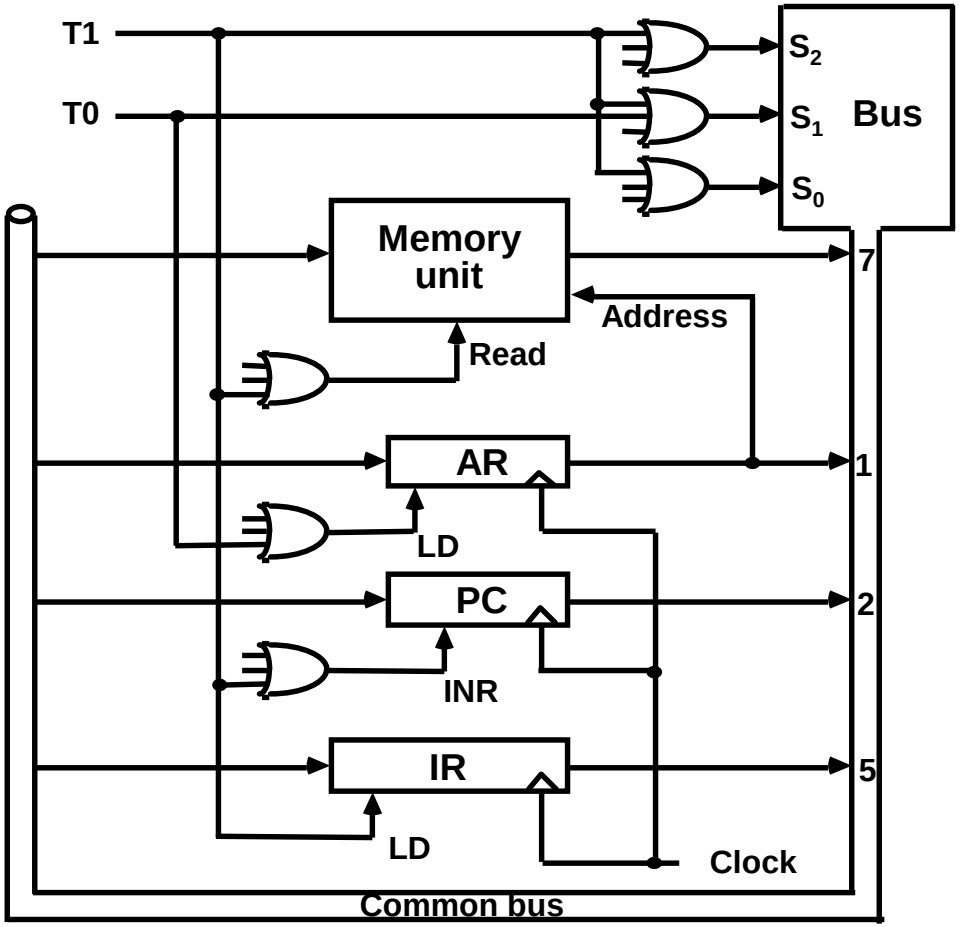

DETERMINE THE TYPE OF INSTRUCTION

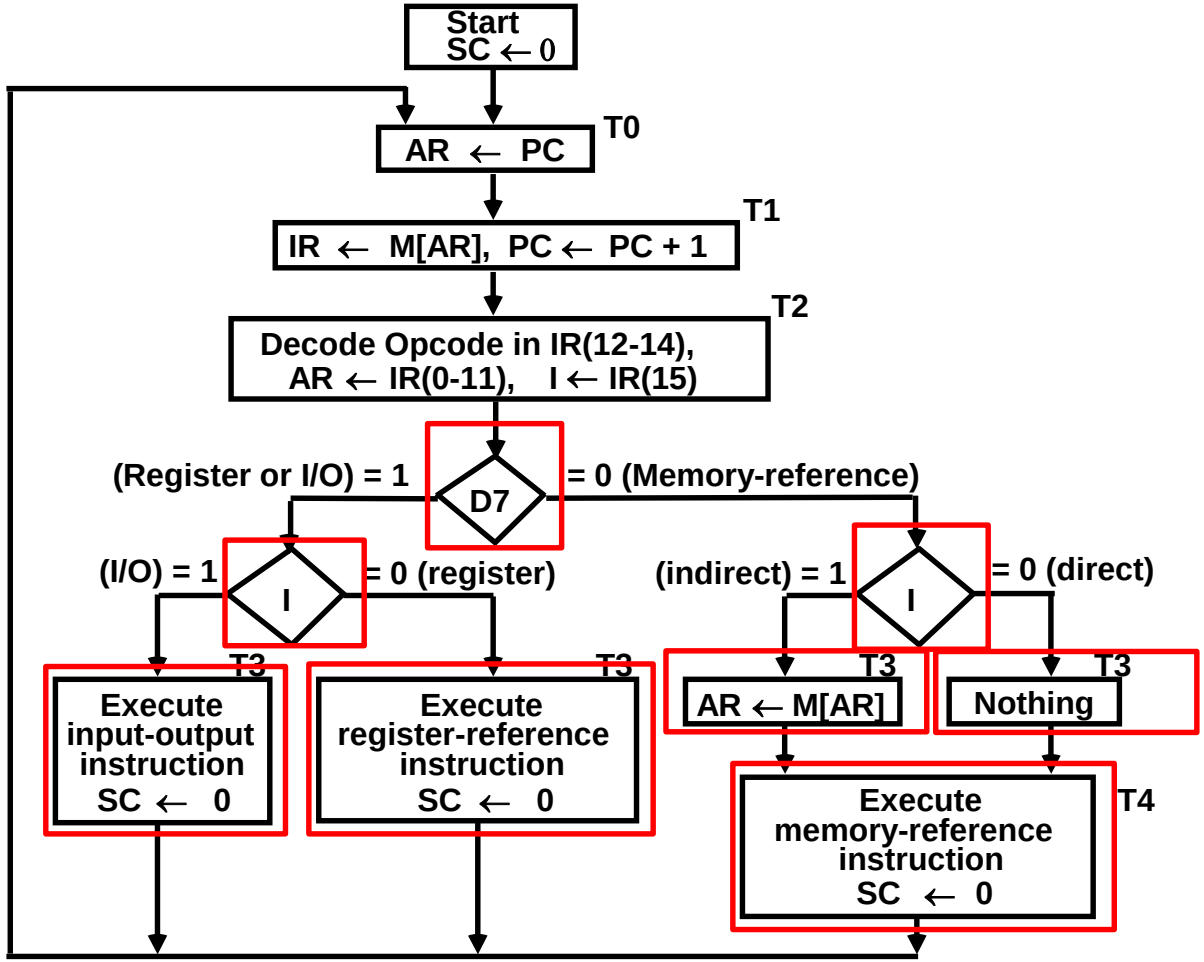

D'_7IT_3: AR ← M[AR]
$D'_7I'T_3$: Nothing
$D_7I'T_3$: Execute a register-reference instr.
D_7IT_3: Execute an input-output instr.

REGISTER REFERENCE INSTRUCTIONS

Register Reference Instructions are identified when

- $D_7 = 1$, $I = 0$
- Register Ref. Instr. is specified in $b_0 \sim b_{11}$ of IR
- Execution starts with timing signal T_3

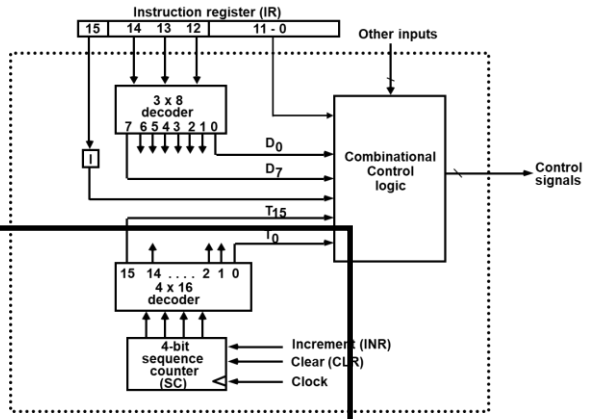

$r = D_7\, I'\, T_3$ => Register Reference Instruction

$B_i = IR(i)$, i=0,1,2,...,11

	r:	SC ← 0
CLA	rB_{11}:	AC ← 0
CLE	rB_{10}:	E ← 0
CMA	rB_9:	AC ← AC'
CME	rB_8:	E ← E'
CIR	rB_7:	AC ← shr AC, AC(15) ← E, E ← AC(0)
CIL	rB_6:	AC ← shl AC, AC(0) ← E, E ← AC(15)
INC	rB_5:	AC ← AC + 1
SPA	rB_4:	if (AC(15) = 0) then (PC ← PC+1)
SNA	rB_3:	if (AC(15) = 1) then (PC ← PC+1)
SZA	rB_2:	if (AC = 0) then (PC ← PC+1)
SZE	rB_1:	if (E = 0) then (PC ← PC+1)
HLT	rB_0:	S ← 0 (S is a start-stop flip-flop)

MEMORY REFERENCE INSTRUCTIONS

Symbol	Operation Decoder	Symbolic Description
AND	D_0	$AC \leftarrow AC \wedge M[AR]$
ADD	D_1	$AC \leftarrow AC + M[AR], E \leftarrow C_{out}$
LDA	D_2	$AC \leftarrow M[AR]$
STA	D_3	$M[AR] \leftarrow AC$
BUN	D_4	$PC \leftarrow AR$
BSA	D_5	$M[AR] \leftarrow PC, PC \leftarrow AR + 1$
ISZ	D_6	$M[AR] \leftarrow M[AR] + 1$, if $M[AR] + 1 = 0$ then $PC \leftarrow PC+1$

- The effective address of the instruction is in AR and was placed there during timing signal T_2 when I = 0, or during timing signal T_3 when I = 1
- Memory cycle is assumed to be short enough to complete in a CPU cycle
- The execution of MR instruction starts with T_4

AND to AC

D_0T_4: $DR \leftarrow M[AR]$ Read operand

D_0T_5: $AC \leftarrow AC \wedge DR, SC \leftarrow 0$ AND with AC

ADD to AC

D_1T_4: $DR \leftarrow M[AR]$ Read operand

D_1T_5: $AC \leftarrow AC + DR, E \leftarrow C_{out}, SC \leftarrow 0$ Add to AC and store carry in E

MEMORY REFERENCE INSTRUCTIONS

LDA: Load to AC

D_2T_4: DR ← M[AR]

D_2T_5: AC ← DR, SC ← 0

STA: Store AC

D_3T_4: M[AR] ← AC, SC ← 0

BUN: Branch Unconditionally

D_4T_4: PC ← AR, SC ← 0

BSA: Branch and Save Return Address

M[AR] ← PC, PC ← AR + 1

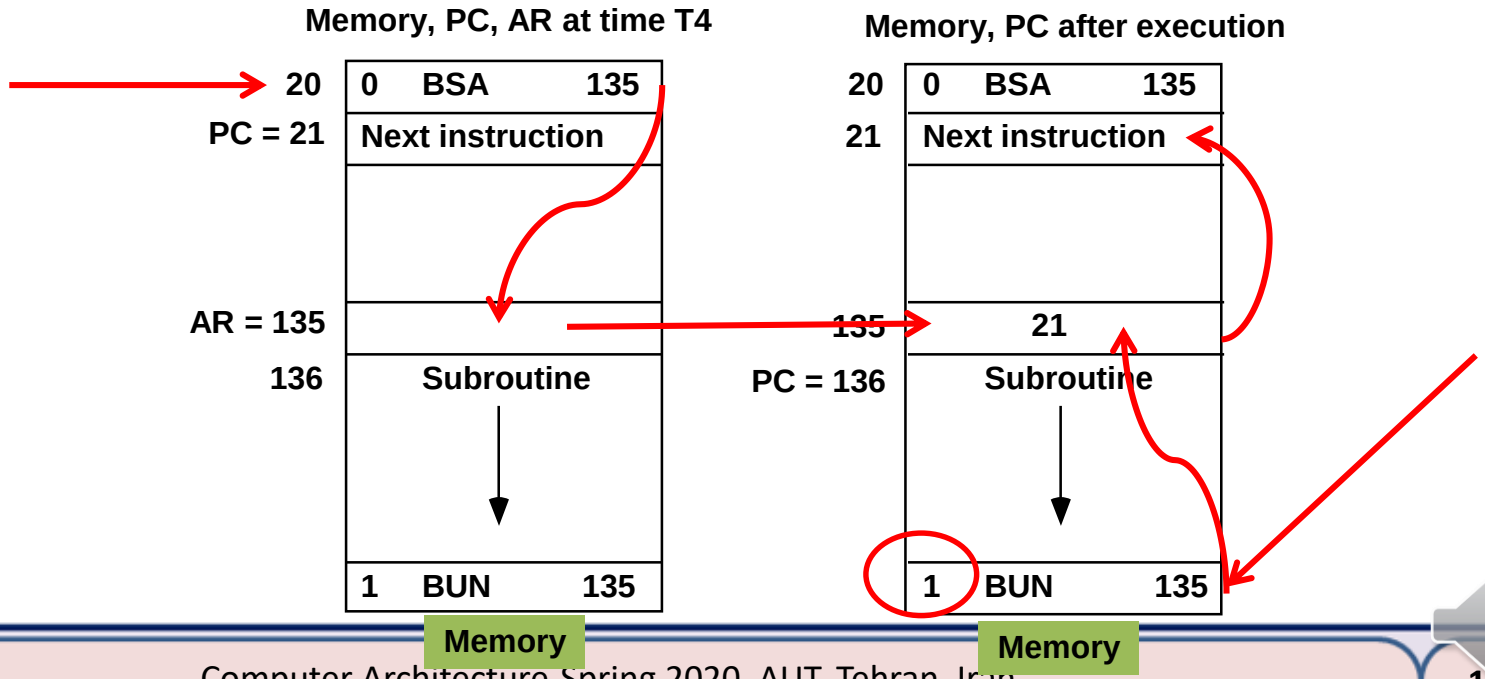

MEMORY REFERENCE INSTRUCTIONS

BSA:

D_5T_4: $M[AR] \leftarrow PC,\ AR \leftarrow AR + 1$

D_5T_5: $PC \leftarrow AR,\ SC \leftarrow 0$

ISZ: Increment and Skip-if-Zero

D_6T_4: $DR \leftarrow M[AR]$

D_6T_5: $DR \leftarrow DR + 1$

D_6T_6: $M[AR] \leftarrow DR,\ \text{if } (DR = 0) \text{ then } (PC \leftarrow PC + 1),\ SC \leftarrow 0$

FLOWCHART for MEMORY REFERENCE INSTRUCTIONS

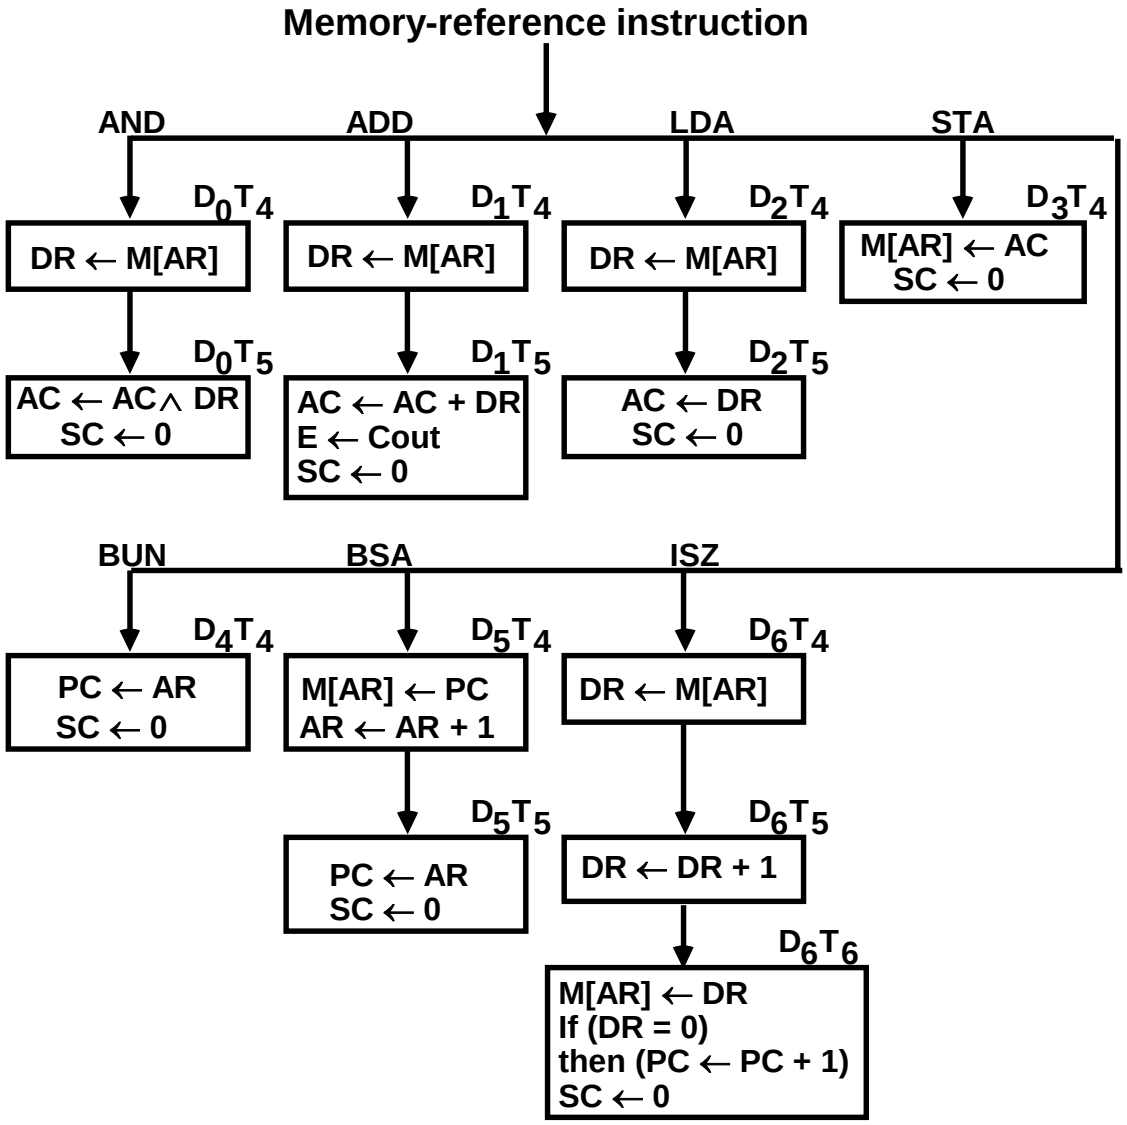

to be continued