
NEMA14 / CH32X035

Power & USB-PD

Motor supply negotiation, reverse-blocked logic power and 3.3 V conversion


USB-C motor power

Fixed 15 V request; data and SBU contacts unused

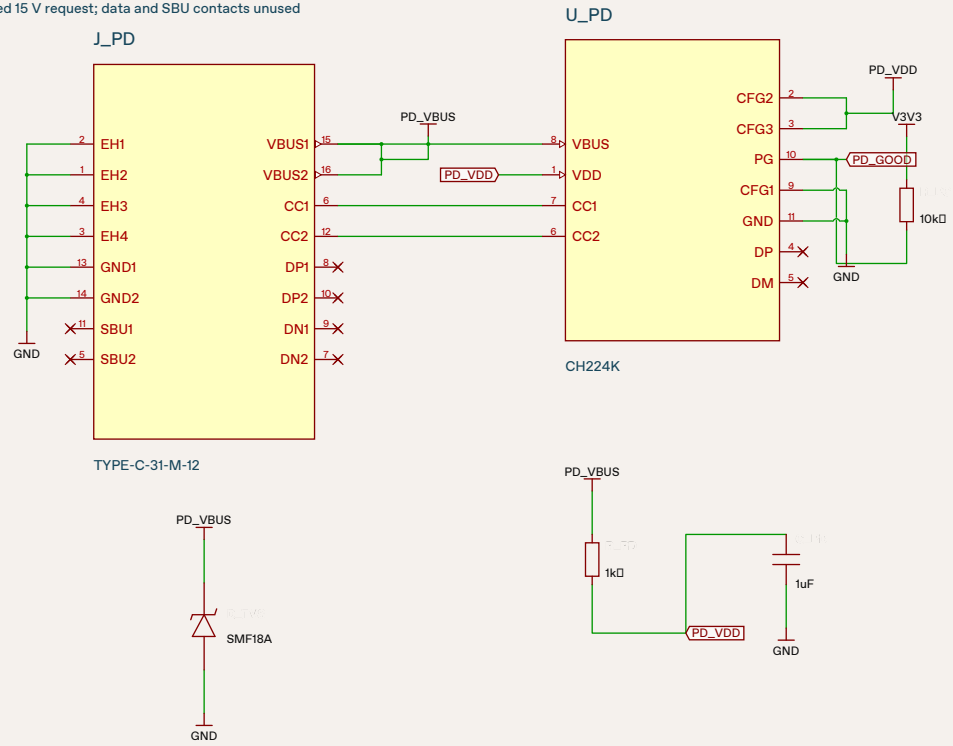

3.3 V logic supply

AP63203 fixed-output buck; USB power is diode-isolated

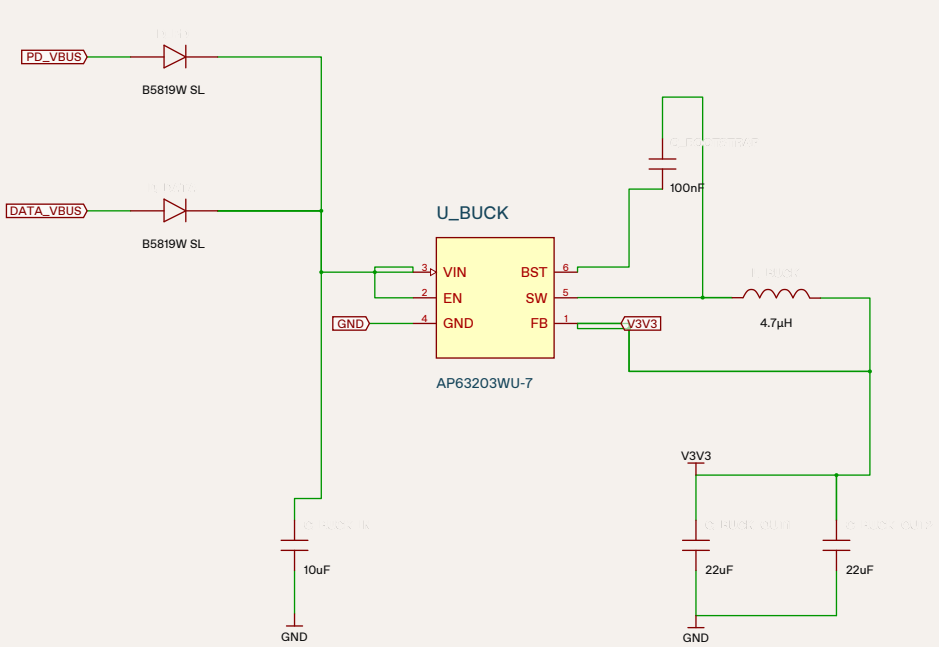

PD_VBUS = motor rail DATA_VBUS = programming USB 5 V

VIN range and transients require bench qualification.


NEMA14 / CH32X035

Programming & USB

Programming USB-C, data-line protection and nonvolatile boot interfaces


USB-C data port

Separate 5.1 kΩ CC pull-downs; duplicated D+/D− contacts

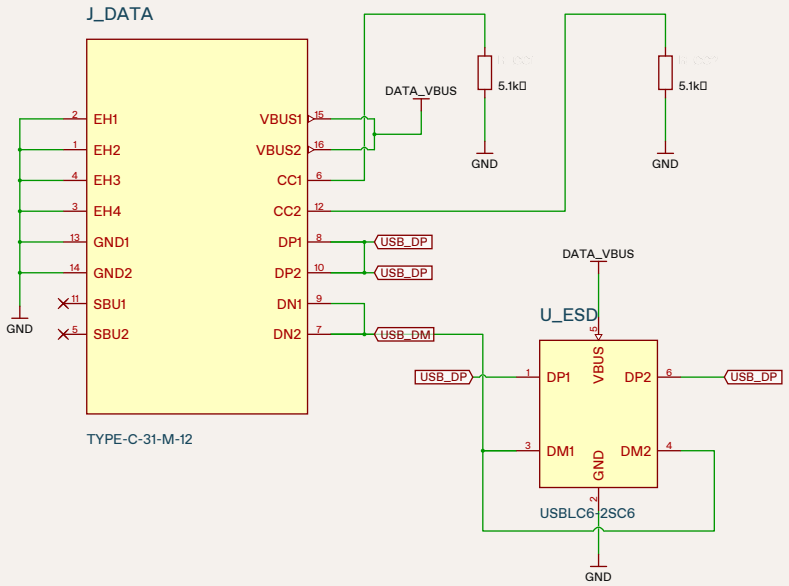


Boot & debug access

Boot contact and WCH DCK/DIO are retained

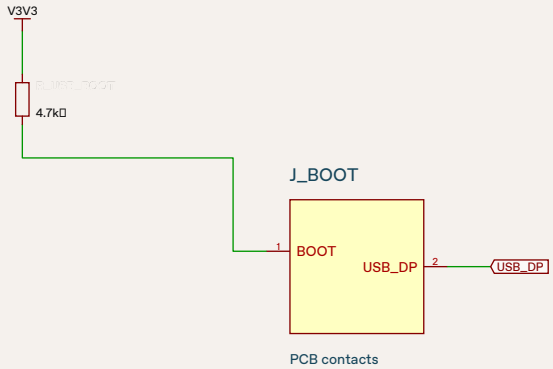

USB presence

Resistive divider to MCU; fixed 5 V input only

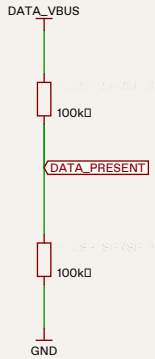

USB full-speed D+/D− route directly to CH32X035.


Debug interface is shown on Controller sheet 03.

NEMA14 / CH32X035

Controller & clocks

MCU interfaces, reset/debug access, power decoupling and clock support


U_MCU

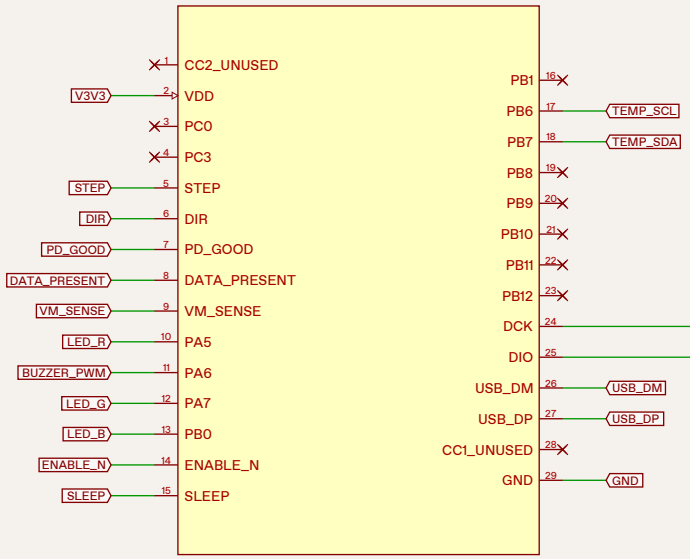


CH32X035G8U6

3.3 V bypass

Place bypass capacitors close to VDD



J_DEBUG



PCB contacts

TMP102 uses software I²C: PB7 SDA / PB6 SCL.

Buzzer: PA6 TIM3_CH1. RGB: PA5 / PA7 / PB0.

Unused GPIO and USB-C CC pins are explicitly NC.


NEMA14 / CH32X035


Stepper motor driver

A4988 phase outputs, charge pump, current limit and motor-voltage measurement

Driver supplies


Local bulk and high-frequency bypass






JST PH pin order: 1 A+ 2 A– 3 B+ 4 B–

U_DRV

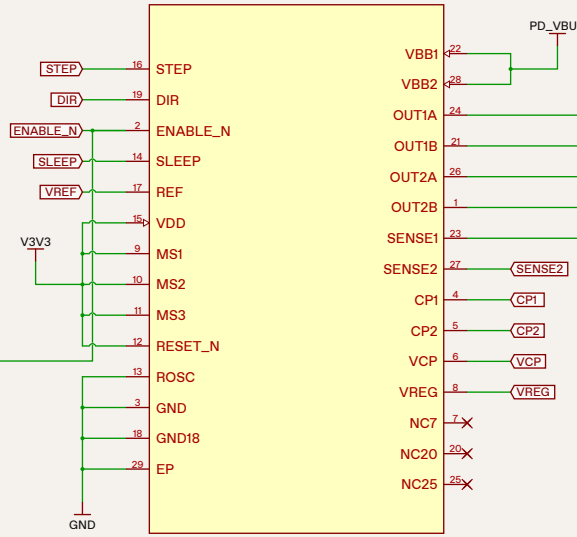


J_MOTOR




B4B-PH-K-S(LF)(SN)

Current reference

VREF / (8 × RSENSE) = 0.351 A nominal

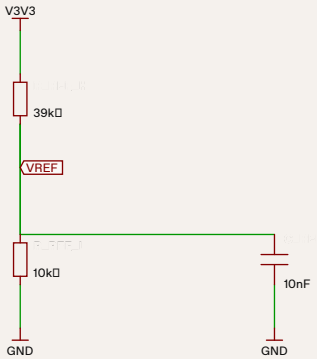










Motor voltage monitor

100 kΩ / 10 kΩ divider; 10 nF filter

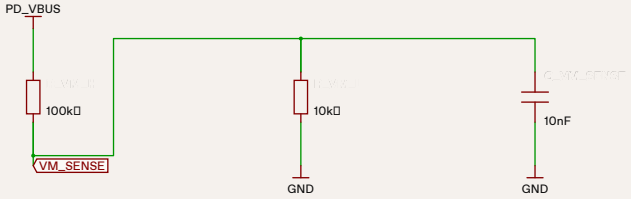




NEMA14 / CH32X035

Temperature & feedback

I²C temperature telemetry, RGB status outputs and PWM magnetic buzzer


TMP102 temperature

ADD0 grounded: address 0x48; ALERT unused

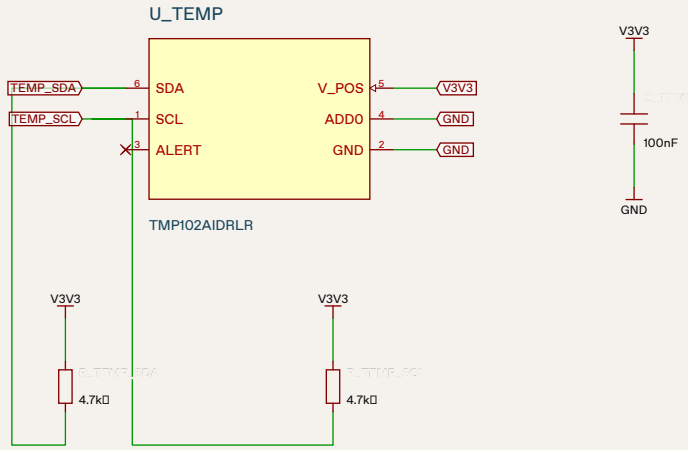

RGB status indicator


Common anode uses programming USB 5 V

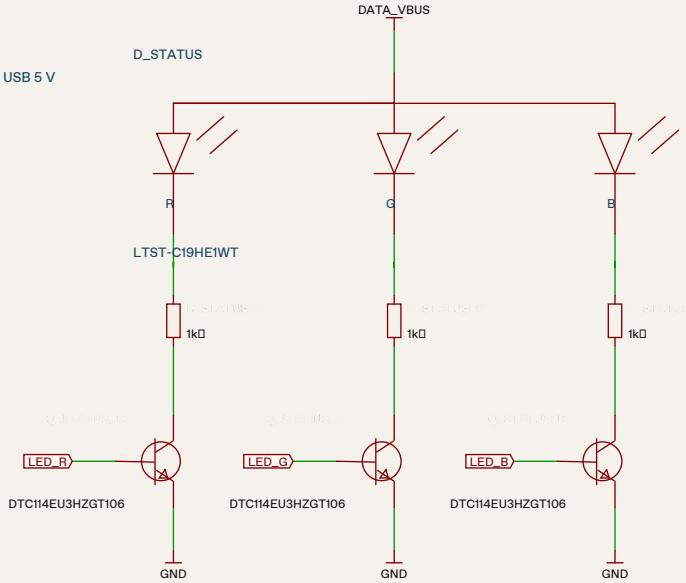

DTC114E: NPN with internal input/bias resistors.


PWM buzzer

120 mA magnetic load; MOSFET drive and flyback diode

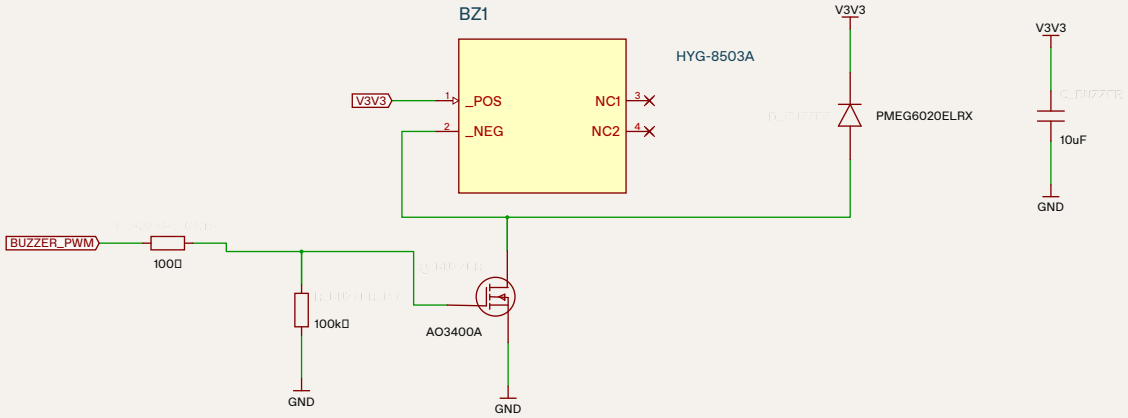

Power indication

3.3 V rail present; RGB/buzzer require firmware

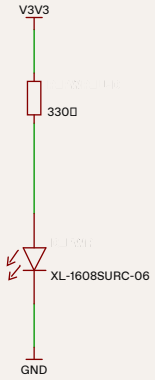

AnasSarkiz / CH32X035 motor controller

35 × 35 mm | 4-layer PCB | Hardware prototype — assembly/firmware/bench qualification pending

Sheet 5 / 5 · A4 · Rev SC-01