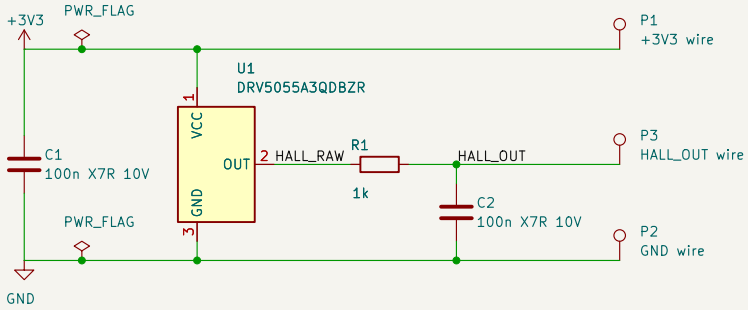


C1: supply decoupling, at least 10 nF (DRV5055 datasheet 7.4).
Back face, directly behind U1, joined through vias (D-059).

R1 + C2: low-pass, fc = 1 / (2 pi x 1 k x 100 n) = 1.6 kHz.
R1 also keeps C2 off U1's output (datasheet 7.1.3: a bare capacitor makes it unstable).

P1-P3: 0.8 x 1.2 mm wire pads on the back face, local Y 2.9 / 4.0 / 5.1.
J10-8 cable to PCB-10: P1 -> pin 4 (+3V3), P2 -> pin 2 (GND), P3 -> pin 5 (HALL_OUT, C3 ADC).
Wire-break bias (pull-up on HALL_OUT) belongs on PCB-10, not here.

Spec: docs/03-build/01-chassis/v1/research/nose-hall-board.md
DRV5055A3 Hall sensor for the ball-nose touch (D-013, D-059)
Makad

Sheet: /
File: pcb-15-nose-hall.kicad_sch

Title: PCB-15 Nose Hall carrier

Size: A4	Date: 2026-10-14	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1