


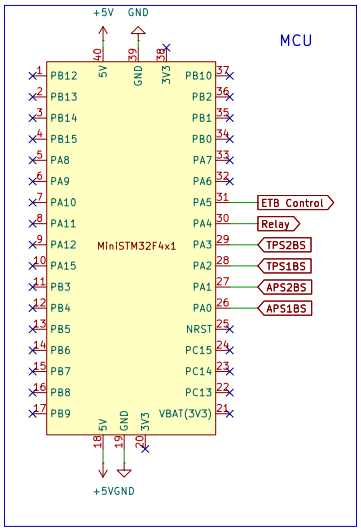


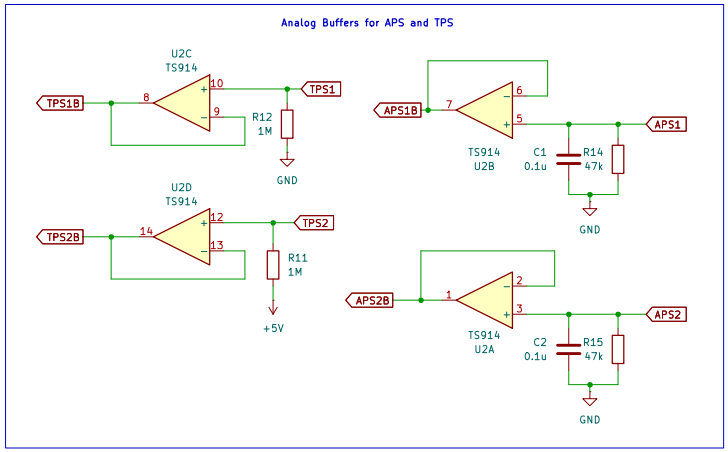


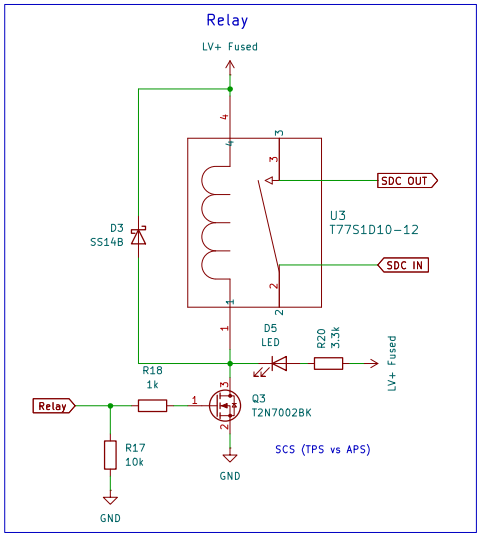






For programming
Initial setup is:
Initial value of
APS1 = -
APS2 = -
TPS1 = 1.1V
TPS2 = 3.9V
Plausibility = 1
Timer = 0
Relay = 1
ETB Control = 1
First time startup = wait 1s


Loop the below
1) Every 10ms SCAN ADC
2) First check SCS (APSx & TPSx != 3.3V/0V)
(If false, turn off Relay = 0) (Else Relay = 1)
3) Check APS1 == APS2 or (abs(APS2 − APS1/2) >= 0.1*APS2) or (abs(5
(If true & timer = 1 don't do anything, else turn on timer for 100ms, time
(Else Turn timer off, timer = 0)
4) If timer runs out before, turn plausibility = 0 and ETB Control to 0. Del

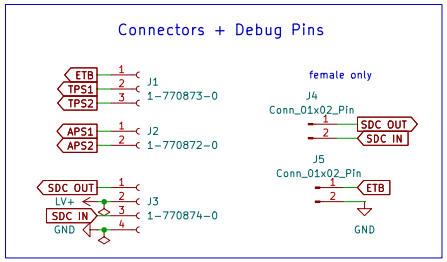

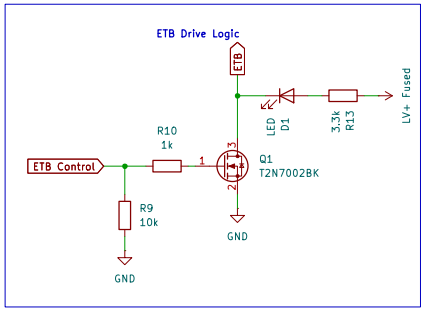

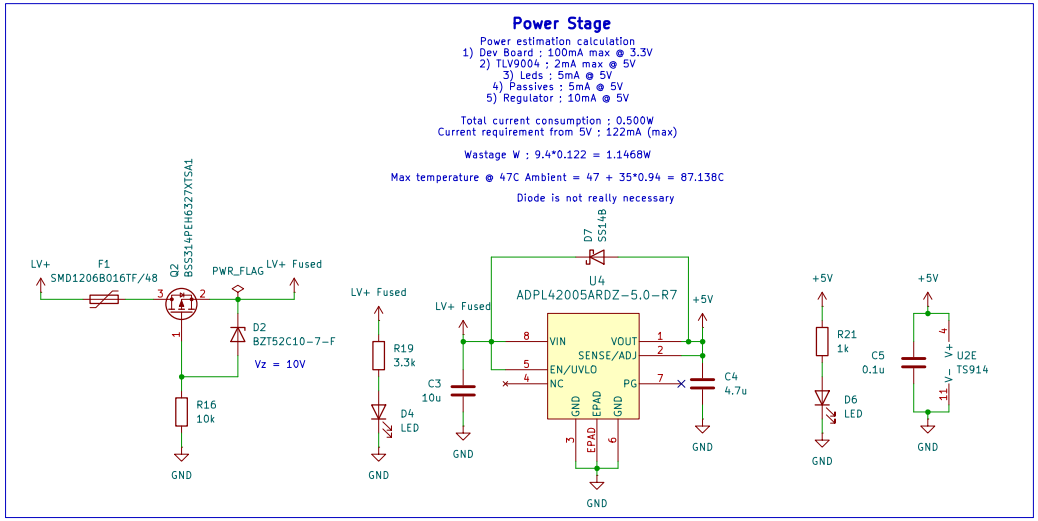

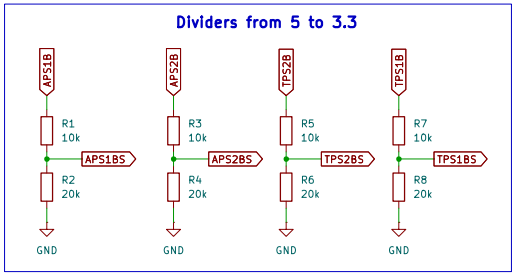



Note: increase resistance

Desgined by Aditeya Sarkar **Ashwa Racing**		
File: APPS-RZ-XX7-C.kicad_sch		
Title: Accelerator Pedal Position Sensor Board		
Size: User	Date: 2026-04-25	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1