



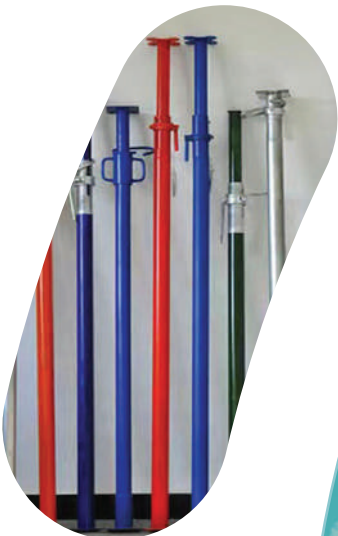

GRAVITY
ENGINEERING WORKS

Scaffolding Solutions

that Build the Future.

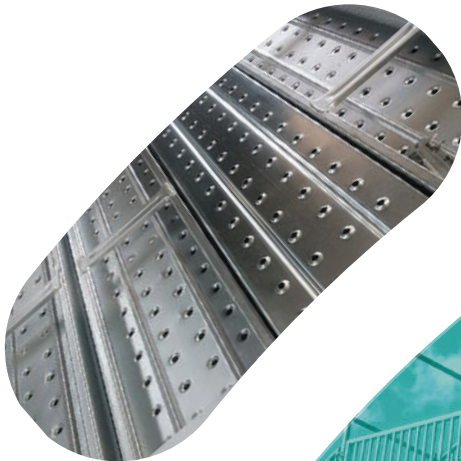

**Manufacturers of System Scaffolding,
Shoring & Formwork Accessories**

www.gravityengineeringworks.com

Who we are?

Gravity Engineering Works is a premier global supplier of industrial hardware, specializing in scaffolding, fasteners and bolts, and garden tools. Committed to precision, durability, and innovation, we offer a comprehensive range of high-quality products tailored to meet the rigorous demands of diverse industries. Our solutions are designed to enhance efficiency, safety, and productivity in various applications.

Why Gravity Engineering?

Gravity Engineering Works offers comprehensive scaffolding solutions designed for safety, reliability, and efficiency. Our wide range of components, including frames, planks, braces, and accessories, cater to diverse construction and industrial needs.

- Safe and reliable access to work sites
- Versatile components for various applications
- Durable and long-lasting materials
- Expert support and guidance

Our commitment to quality is a paramount. We utilize state-of-the-art manufacturing processes, including automated welding machines, to ensure exceptional consistency and durability in every product we produce.

Our high-tensile steel tubes meet the rigorous S355 grade standard, with a minimum yield strength of 50,000 PSI.





Quality

Gravity Engineering Works delivers uncompromising quality through precision manufacturing, robust materials, and strict standards, ensuring reliable, durable engineering solutions that perform across demanding industrial applications.

Contents

Ringlock System	04
Ringlock Accessories	06
Cuplock System	07
Support Railings	09
Kwikstage System	10
Ladders, Brackets, Gates & Accessories	12
Screw Base Jacks	13
Walk Boards & Steel Planks	14
Steel Props	15
Forged & Pressed Couplers	17
Framework Accessories	18
Frames	19

A close-up, high-angle photograph of the Ringlock scaffolding system. The image shows several cylindrical metal tubes, likely made of galvanized steel, arranged in a grid-like pattern. These tubes are interconnected by black, circular locking rings that are bolted around the circumference of the tubes. The perspective is from above, looking down at the assembly, which creates a strong sense of depth and repetition. The lighting is bright, highlighting the metallic surfaces and the industrial nature of the components. The overall color palette is dominated by the silver of the metal and the black of the locking rings, with a teal gradient overlay at the bottom where the text is located.

Ringlock System

The Ringlock system from Gravity Engineering Works is a high-performance modular scaffolding solution that ensures fast assembly, robust strength, and versatile configurations, delivering safe, durable access platforms for diverse construction and industrial projects with reliable load-bearing capability.



Ringlock Vertical

Item Code	Description	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
RLS-VS-16-H	Standard (1 Ring)	0.50	1.6	3.0	6.8
RLS-VS-33-H	Standard (2 Ring)	1.00	3.3	5.4	11.9
RLS-VS-49-H	Standard (3 Ring)	1.50	4.9	7.6	16.7
RLS-VS-66-H	Standard (4 Ring)	2.00	6.6	10.0	22.0
RLS-VS-82-H	Standard (5 Ring)	2.50	8.2	13.0	28.7
RLS-VS-98-H	Standard (6 Ring)	3.00	9.8	14.9	32.8



Ringlock Ledger

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
RLS-HL-24-H	0.73	2.4	3.13	6.90
RLS-HL-33-H	1.0	3.3	4.11	9.06
RLS-HL-36-H	1.09	3.6	4.44	9.80
RLS-HL-52-H	1.57	5.2	6.22	13.71
RLS-HL-68-H	2.07	6.8	8.07	17.79
RLS-HL-70-H	2.13	7.0	8.29	18.28
RLS-HL-85-H	2.57	8.5	9.92	21.87
RLS-HL-100-H	3.05	10.0	11.70	25.78
RLS-HL-101-H	3.07	10.1	11.77	25.95



Ringlock Brace

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
RLS-DV-24-H	2.0 x 0.73	6.6 x 2.4	7.89	17.39
RLS-DV-33-H	2.0 x 1.0	6.6 x 3.3	8.16	17.99
RLS-DV-36-H	2.0 x 1.09	6.6 x 3.6	8.27	18.23
RLS-DV-52-H	2.0 x 1.57	6.6 x 5.2	8.99	19.81
RLS-DV-68-H	2.0 x 2.07	6.6 x 6.8	9.94	21.92
RLS-DV-70-H	2.0 x 2.13	6.6 x 7.0	10.06	22.19
RLS-DV-85-H	2.0 x 2.57	6.6 x 8.5	11.04	24.33
RLS-DV-100-H	2.0 x 3.05	6.6 x 10.0	12.18	26.86
RLS-DV-101-H	2.0 x 3.07	6.6 x 10.1	12.23	26.96



Base Collar

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
RLS-BC-10-H	0.3	1.0	2.1	0.57

Double Ledger

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
RLS-HL-24-H	0.73	2.4	3.13	6.90
RLS-HL-33-H	1.0	3.3	4.11	9.06
RLS-HL-36-H	1.09	3.6	4.44	9.80
RLS-HL-52-H	1.57	5.2	6.22	13.71
RLS-HL-68-H	2.07	6.8	8.07	17.79
RLS-HL-70-H	2.13	7.0	8.29	18.28
RLS-HL-85-H	2.57	8.5	9.92	21.87
RLS-HL-100-H	3.05	10.0	11.70	25.78
RLS-HL-101-H	3.07	10.1	11.77	25.95



Board Bracket

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
RLS-BB-15-H	0.45	1.5	5.20	11.5
RLS-BB-25-H	0.75	2.5	7.25	16.0

Ringlock Accessories



Brace End

RLSA-BE



Ledger End

RLSA-LE



Rosette

RLSA-R



Wedge

RLSA-WP



Spigot

RLSA-S

Cuplock System

Cup Lock system allows up to four horizontal members to connect to a single vertical through a unique node point. Using fixed and sliding cups, components lock securely with a simple hammer action, eliminating nuts, bolts, or wedges.

www.gravityengineeringworks.com



Cuplock Vertical

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
CL-VS-16-H	0.50	1.6	2.51	5.53
CL-VS-33-H	1.00	3.3	5.00	11.02
CL-VS-49-H	1.50	4.9	7.50	16.53
CL-VS-66-H	2.00	6.6	10.00	22.05
CL-VS-82-H	2.50	8.2	12.49	27.54
CL-VS-98-H	3.00	9.8	15.00	33.07



Cuplock Ledger

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
CL-HL-16-H	0.50	1.6	2.01	4.43
CL-HL-23-H	0.70	2.3	2.73	6.02
CL-HL-33-H	1.00	3.3	3.74	8.25
CL-HL-50-H	1.50	5.0	5.53	12.19
CL-HL-60-H	1.80	6.0	6.61	14.57
CL-HL-82-H	2.50	8.2	9.47	20.88
CL-HL-98-H	3.00	9.8	11.27	24.85



Cuplock Brace

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
CL-DB-35-H	1.07 x 2.0	3.5 x 6.6	6.87	15.15
CL-DB-50-H	1.52 x 2.0	5.6 x 6.6	7.52	16.58
CL-DB-70-H	2.13 x 2.0	7.0 x 6.6	8.59	18.94
CL-DB-100-H	3.05 x 2.0	10.0 x 6.6	10.49	23.35



Cuplock Transom

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
CL-T-40-H	1.20	4.0	6.26	13.80
CL-T-43-H	1.30	4.3	6.62	14.59
CL-T-60-H	1.80	6.0	8.39	18.50
CL-T-82-H	2.50	8.2	10.88	23.98

Board Bracket

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
CL-BB-13-H	0.40	1.3	4.51	9.94
CL-BB-22-H	0.66	2.2	6.35	14.00
CL-BB-29-H	0.88	2.9	7.78	17.15



Top Cup
CLA-TC



Bottom Cup
CLA-BC

Ledger Blade
CLA-LB



Spigot
CLA-S



Support Railings



Support Guard Rail 500 mm

- (A) Finish: Hot Dip Galva
- (B) Finish : Electro Galva
- (C) Finish : Painted



Guard Rail 1145 mm

- (A) Finish: Hot Dip Galva
- (B) Finish : Electro Galva
- (C) Finish : Painted



Guard Rail 300 mm

- (A) Finish: Hot Dip Galva
- (B) Finish : Electro Galva
- (C) Finish : Painted




Support Guard Rail 200 mm

- (A) Finish: Hot Dip Galva
- (B) Finish : Electro Galva
- (C) Finish : Painted



Guard Rail 100 mm

- (A) Finish: Hot Dip Galva
- (B) Finish : Electro Galva
- (C) Finish : Painted

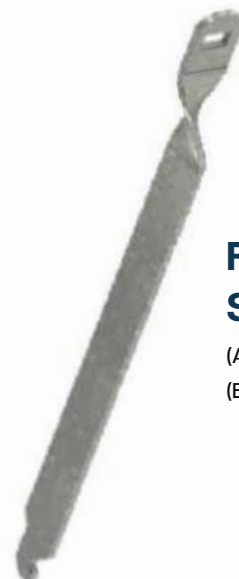

Formwork Strip Clamp

- (A) Finish : Electro Galva
- (B) Size/Length: 40 x 5x 538 mm

Kwikstage System

Kwikstage system is a versatile modular scaffolding solution featuring wedge-lock connections. Horizontals, ledgers, and braces securely fix into vertical standards with a hammer-locked wedge, ensuring fast erection, high load capacity, stability, and adaptability for construction, maintenance, and industrial access applications.



Kwikstage Vertical

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
KS-VS-33-H	1.00	3.3	6.2	13.7
KS-VS-66-H	2.00	6.6	11.7	25.8
KS-VS-82-H	2.5	8.2	14.4	31.8
KS-VS-98-H	3.0	9.8	17.2	38.0



Cuplock Ledger

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
CL-HL-39-H	1.2	3.9	5.5	12.2
CL-HL-59-H	1.8	5.9	6.9	6.9
CL-HL-79-H	2.4	7.9	8.8	8.8



Cuplock Ledger

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
CL-DB-24-H	0.7 x 2.0	2.4 x 6.6	8.0	17.7
CL-DB-46-H	1.4 x 2.0	4.6 x 6.6	8.8	19.5
CL-DB-52-H	1.6 x 2.0	5.2 x 6.6	9.1	20.1
CL-DB-89-H	2.0 x 2.0	8.9 x 6.6	10.1	22.2
CL-DB-98-H	3.0 x 2.0	9.8 x 6.6	12.4	27.0



Broad Bracket

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
CL-T-40-H	1.20	4.0	6.26	13.80
CL-T-43-H	1.30	4.3	6.62	14.59
CL-T-60-H	1.80	6.0	8.39	18.50
CL-T-82-H	2.50	8.2	10.88	23.98



Kwikstage Transom

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
KS-T-26-H	0.8	2.6	5.9	13.0
KS-T-39-H	1.20	3.9	9.7	21.3
KS-T-59-H	1.80	5.9	13.1	28.9

Board Bracket

Item Code	Weight in Kg	Weight in Lbs.
KS-ETBB-13-H	1.3	2.866



V-Pressing
KSA-VP



Guiding Pin
KSA-GP



U-Clip
KSA-UC



Wedge /Pin
KSA-WP

Ladders, Brackets, Gates & Accessories



Ladder

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
SS-L-L3-H	0.9	3	5.0	11.0
SS-L-L5-H	1.5	5	7.9	17.34

Heavy Duty Ladder

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
SS-HL-L3-H	0.9	3	7.0	15.33
SS-HL-L5-H	1.5	10	20.0	44.88



Expandable Gate

Item Code	Description	Min. Extension in Inch	Min. Extension in Mtr.	Max. Extension in Inch	Max. Extension in Mtr.
SS-EG-2434	Gate Expandable 25" to 34"	25.20	0.640	31.9	0.81



Ladder Bracket

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
SS-LB-13-H	0.3	13.7	2.9	6.40
SS-LB-17-H	0.4	17	3.1	6.83

Twist Lock / Tube Lock

Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
SS-TWL-20-H	0.6	2.0	2.5	5.6
SS-TWL-30-H	0.9	3.0	3.3	7.3
SS-TWL-40-H	1.2	4.0	4.3	9.1
SS-TWL-50-H	1.5	5.0	4.9	10.8
SS-TWL-60-H	1.8	6.0	5.7	12.6
SS-TWL-80-H	2.4	8.0	7.3	16.1
SS-TWL-100-H	3.0	10.0	8.9	19.6
SS-TWL-130-H	3.96	13.0	11.24	24.8
SS-TWL-160-H	4.87	16.0	13.65	30.1



Twist Lock Base Plate

SS-TWL-BP



SBJ-HJ



Hollow Screw Base Jack

Thread : 4TPI

Tube OD: 32, 34, 38 mm

Length in mm: 400, 500, 600, 700, 800

Plate Size : 150*150*5, 150*150*6mm

Jack Nut: Casted and Forged

SBJ-SJ



Solid Screw Jack

Thread: 4TPI

Tube OD: 32, 34, 38 mm

Length in mm: 400, 500, 600, 700

Plate Size : 150*150*5mm

Jack Nut: Casted and Forged

SBJ-SWJ



Swivel Screw Jack

Thread : 4TPI

Tube OD: 32, 34, 38 mm

Length in mm: 400, 500, 600, 700, 800

Plate Size: 150*150*5mm

Jack Nut: Casted and Forged

SBJ-UHJ



U-Head Screw Jack

Thread : 4TPI

Tube OD: 32, 34, 38 mm

Length in mm: 400, 500, 600, 700, 800

Plate Size: 150*100*75*5,

115*100*50*5mm

Jack Nut : Casted and Forged

SBJ-FHJ



Fork Head Screw Jack

Thread : 4TPI

Thread OD: 32, 34, 38 mm

Length in mm: 400, 500, 600, 700, 800

Jack Nut: Casted and Forged

SBJ-UJ




Universal Screw Jack

Thread: 4TPI

Tube OD: 32, 34, 38 mm

Length in mm: 400, 500, 600, 700, 800

Jack Nut: Casted and Forged

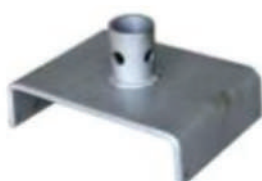

U-Head Plate
SBJ-UHP



Base Plate
SBJ-BP



Caster Wheel 6" & 8"
SBJ-CW

Walk Boards & Steel Planks



SS-ASP

American type Steel Plank

Size (mtr.): 1.57, 2.07, 2.57, 3.07

Size (feet): 5.2, 6.8, 8.4, 10.1



SS-ATSP

American type Steel Plank

Size (mtr.): 1.57, 2.07, 2.57, 3.07

Size (feet): 5.2, 6.8, 8.4, 10.1



SS-SRHP

Steel Raised Hook Plank

Size (mtr.): 1.57, 2.07, 2.57, 3.07

Size (feet): 5.2, 6.8, 8.4, 10.1



SS-LSPWH

Light Duty Steel Plank without Head

Size (mtr.): 1.57, 2.07, 2.57, 3.07

Size (feet): 5.2, 6.8, 8.4, 10.1




SS-SPWH

Steel Plank without Hook

Size (mtr.): 1.67, 2.07, 2.57, 3.07

Size (feet): 5.2, 6.8, 8.4, 10.1

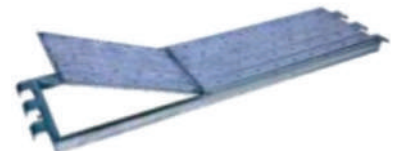

SS-APM

Aluminium Plank with Manhole

Size (mtr.): 1.57, 2.07, 2.57, 3.07

Width (mtr.): 0.61

Size (feet): 5.2, 6.8, 8.4, 10.1

Width (feet): 2.0




SS-ITB

Interlocking Toe Board

Size (mtr.): 1.57, 2.07, 2.57, 3.07

Size (feet): 5.2, 6.8, 8.4, 10.1

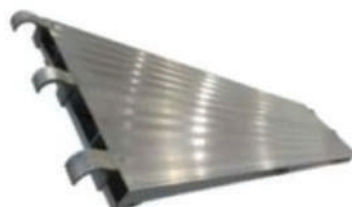

SS-AP


Aluminium Plank

Size (mtr.): 1.57, 2.07, 2.57, 3.07

Width (mtr.): 0.32, 0.61

Size (feet): 5.2, 6.8, 8.4, 10.1

Width (feet): 1.0, 2.0

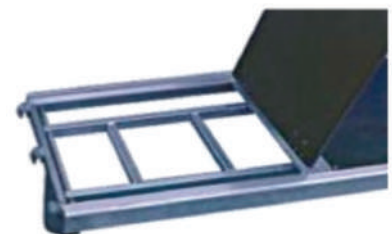

SS-PM

Plank with Manhole

Size (mtr.): 1.57, 2.07, 2.57, 3.07

Size (mtr.): 0.61

Size (feet): 5.2, 6.8, 8.4, 10.1

Width (feet): 2.0

Steel-Props



Light Duty Prop

Product Description :

Outer Tube: 56*1.8 mm

Inner Tube: 48.3*1.8 mm

Plate Size : 120*120*4 mm

Material: 5235, \$355

Item Code	Length in Mtr.
SP-LDP-20-H	1.5 - 2.0
SP-LDP-25-H	1.7 - 2.5
SP-LDP-30-H	2.0 - 3.0
SP-LDP-40-H	2.5 - 4.0



Medium Duty Prop

Product Description :

Outer Tube: 60*2.0 mm

Inner Tube: 48.3*2.0 mm

Plate Size : 120*120*5 mm

Material : 5235, 5355

Item Code	Length in Mtr.
SP-MDP-20-H	1.5 - 2.0
SP-MDP-25-H	1.7 - 2.5
SP-MDP-30-H	2.0 - 3.0
SP-MDP-40-H	2.5 - 4.0



Heavy Duty Prop

Product Description:

Outer Tube : 60*3.0 mm

Inner Tube: 48.3*3.0 mm

Plate Size : 120*120*5 mm

Material: 5235, 5355

Item Code	Length in Mtr.
SP-HDP-20-H	1.5 - 2.0
SP-HDP-25-H	1.7 - 2.5
SP-HDP-30-H	2.0 - 3.0
SP-HDP-40-H	2.5 - 4.0

Steel-Prop Accessories



**Light Duty
Prop Nut**

SPA-LPN



**Light Duty
Prop Sleeve**

SPA-LPS



**Prop Nut
Cover**

SPA-PW



**G-Type
Locking Pin**

SPA-GP



**Locking Pin
With Chain**

SPA-LP



Tripod

SPA-TP



**Fork
Head**

SPA-FH



**Prop
Nut**

SPA-PN



**Flower
Base Plate**

SPA-FBP



**Base
Plate**

SPA-BP



**Prop
Sleeve**

SPA-PS

Forged & Pressed Couplers

DFC-BS-RAC



**British Type
Right Angle Coupler**

Standard: EN-74 / BS-1139

DFC-BS-SWC



**British Type
Swivel Coupler**

Standard: EN-74 / BS-1139

DFC-AS-RAC



**American Type
Swivel Coupler**

Standard: EN-74 / BS-1139

DFC-AS-SWC



**American Type
Right Angle Coupler**

Standard: EN-74 / BS-1139

DFC-GC-RAC



**German Type
Right Angle Coupler**

Standard: EN-74 / BS-1139

DFC-GC-SWC



**German Type
Swivel Coupler**

Standard: EN-74 / BS-1139

DFC-C-SWC



**Combination
Swivel Coupler**

Standard: EN-74 / BS-1139

DFC-C-RAC



**Combination
Right Angle Coupler**

Standard: EN-74 / BS-1139

DFC-BS-GLC



Grave Lock Coupler

Standard: EN-74 / BS-1139

DFC-BS-PC



Putlog Coupler

Standard: EN-74 / BS-1139

DFC-BS-SC



Single Coupler

Standard: EN-74 / BS-1139

DFC-BS-JP



Forged Joint Pin

Standard: EN-74 / BS-1139

PC-BS-RAC



**British Type Pressed
Right Angle Coupler**

Standard: EN-74 / BS-1139

PC-BS-SWC



**British Type Pressed
Swivel Coupler**

Standard: EN-74 / BS-1139

PC-BS-SLC



Sleeve Coupler

Standard: EN-74 / BS-1139

PC-BS-BRC



BRC Coupler

Standard: EN-74 / BS-1139

Formwork Accessories

www.gravityengineeringworks.com



DFC-BS-RAC



**British Type
Right Angle Coupler**

Standard: EN-74 / BS-1139

DFC-BS-SWC



**British Type
Swivel Coupler**

Standard: EN-74 / BS-1139

DFC-AS-RAC



**American Type
Swivel Coupler**

Standard: EN-74 / BS-1139

DFC-AS-SWC



**American Type
Right Angle Coupler**

Standard: EN-74 / BS-1139

DFC-GC-RAC



**German Type
Right Angle Coupler**

Standard: EN-74 / BS-1139

DFC-GC-SWC



**German Type
Swivel Coupler**

Standard: EN-74 / BS-1139

DFC-C-SWC



**Combination
Swivel Coupler**

Standard: EN-74 / BS-1139

DFC-C-RAC



**Combination
Right Angle Coupler**

Standard: EN-74 / BS-1139

DFC-BS-GLC



Grave Lock Coupler

Standard: EN-74 / BS-1139

DFC-BS-PC



Putlog Coupler

Standard: EN-74 / BS-1139

DFC-BS-SC



Single Coupler

Standard: EN-74 / BS-1139

DFC-BS-JP



Forged Joint Pin

Standard: EN-74 / BS-1139

PC-BS-RAC



**British Type Pressed
Right Angle Coupler**

Standard: EN-74 / BS-1139

PC-BS-SWC



**British Type Pressed
Swivel Coupler**

Standard: EN-74 / BS-1139

PC-BS-SLC



Sleeve Coupler

Standard: EN-74 / BS-1139


PC-BS-BRC



BRC Coupler

Standard: EN-74 / BS-1139

Frame System

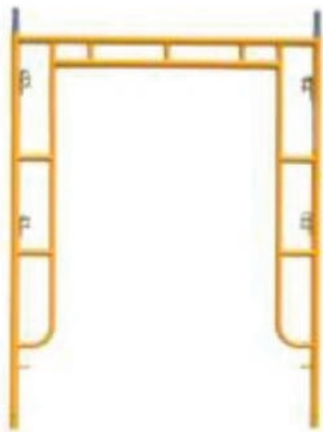

Walk Through Frame

SS-FS-WTF

Size (mm): 2006*1524, 1930*1524, 1219*1700, 1219*1930, 914*1700



Ladder Frame

S5-FS-LF


Size (mm): 1828*762, 1524*762, 914*762



Walk Through Frame

55-FS-WTF-1


Size (mm): 2006*1524, 1930*1524, 1219*1700, 1219*1930, 914*1700

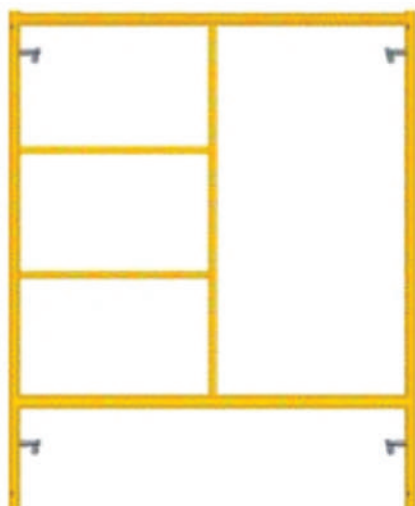

Mason Frame

SS-FS-MFS

Size (mm): 1930*1524, 1524*1524, 1220*1524, 914*1524

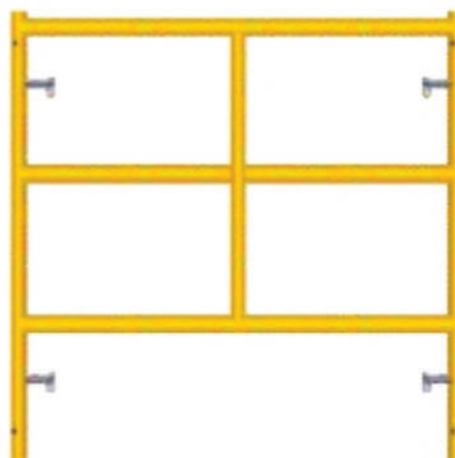

Double Ladder Frame

SS-FS-DLF

Size (mm): 1524*1524, 1524*1930



Cross Brace

SS-FS-CB

Size (mm): 1219*610, 1219*914, 1219*1219, 1524*610, 1829*610, 1829*1229, 2133*1219, 2438*1219, 3048*914, 3038*219



Frame Guard Rail

SS-FS-FGR

Size (mm): 914, 1219, 1524, 2133, 2438, 3048



GRAVITY

ENGINEERING WORKS

 **+91-9115942100**

 www.gravityengineeringworks.com  sales@gravityengineeringworks.com

 Plot No.67, St. No.1, Shiv Shakti Industrial Estate, Bhagwanpura, Sahnewal (Ldh.)-141120

