

Engineering Physics (2025)
Course code 25PY101
Module 2 Unit 2: Optoelectronics

Course Instructor:
Dr. Sreekar Guddeti
Assistant Professor in Physics
Department of Science and Humanities
Vignan's Foundation for Science, Technology and Research

December 8, 2025

1 p-n junction diode – forward and reverse conditions

2 Solar cell

1 p-n junction diode – forward and reverse conditions

2 Solar cell

Optoelectronics

- Electronics is the study of controlling electrical signals.
- Any electrical signal is characterized by its current and voltage properties.
- Electronics is broadly classified into three areas –
 - **Microelectronics** – here we study switching electrical signals, which is useful to represent binary logic. This is necessary for computation. This is also called **digital electronics**. Since power is not a concern, signals have currents of the order of microamperes (hence the name microelectronics) and voltages of the order of few volts
 - **Power electronics** – here we study amplifying electrical signals to transfer energy. This is necessary for energy requirements of society as it is well known that electrical energy is efficient way of energy transfer. Signals have currents of the order of hundreds of amperes and voltages of the order of thousands of volts. This is also called **analog electronics**.
 - Opto-electronics ¹ – here we harness the interaction between electron and photon. The advantages of light like its high velocity, free source of energy (Sun light), are combined with the advantages of electron like its easy manipulation to develop devices of specific requirements.

¹Opto-electronics is a combination of optics and electronics


Definition

- A electrical device is a electrical component with a characteristic or signature $I - V$ behaviour.
- An opto-electronic device is an electrical device whose $I - V$ characteristic is determined by the interaction of light.
- The interaction of light with opto-electronic devices is of two-types –
 - optical absorption
 - Radiative recombination
- The opto-electronic devices based on optical absorption are
 - solar cell
 - photo-diode
- whereas the opto-electronic devices based on radiative recombination are
 - Light Emitting Diode (LED)
 - Laser Diode

Optical absorption

Definition

- Optical absorption is defined as the process of absorption of photon that leads to the generation of charge carriers.
- The generated electron-holes pairs are additional to the already present. Hence they are called **excess charge carriers**.



- In semiconductors, photon with energy greater than energy band gap E_g , it is absorbed and leads to generation of electron-hole pair.


Key Insight

In optical absorption, the photon is the source of energy.

Optical transparency

Definition

Optical transparency is defined as the process of propagation of photon without the generation of charge carriers.



- If the photon energy is less than energy band gap, it is not absorbed and instead propagates through the semiconductor.

Problem

Why common glass is transparent to visible light. [Hint: $E_g^{\text{SiO}_2} = 9 \text{ eV}$.]

Key Insight


In optical transparency, the photon is not absorbed.



Radiative recombination

Definition

Radiative recombination is defined as the process of generation of photon upon combination of excess charge carriers.



- In semiconductors, electron-hole pair recombine to form the covalent band and release the energy equal to energy band gap as a photon.


Key Insight

In radiative recombination, the charge carriers are the source of energy.

Solar cell – construction

Definition

- Solar cell, also technically called the **photovoltaic cell** is an opto-electronic device based on pn junction that can generate electrical power when illuminated.
- A collection of cells in series and parallel combination is called a solar panel

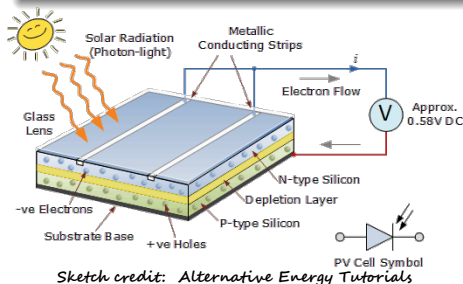

Sketch of solar panel. Sketch taken from Alternative Energy Tutorials

- The main aim of solar cell operation is to convert solar energy into electrical energy.
- Electrodes are deposited on both sides of junction. The top metal electrode is in the form of metal grid with fingers, which permits sunlight to pass through it.

Solar cell – working principle

Definition


The working principle of solar cell involves three processes–

- ① Generation of **excess** electron-hole pairs upon the illumination of light, and
 - ② Separation of electrons from holes **before** radiative recombination due to the built-in electric field.
 - ③ Generation of voltage due to **accumulation** of excess separated charge carriers at the ends of the pn junction
- The solar cell pn junction is operated without bias i.e. zero bias.
 - Upon illumination with photons of suitable energy, the photon are absorbed through the surface area. The covalent bonds of the lattice are broken releasing the free electrons and holes into the conduction band and valence band respectively.

Problem

A material has bandgap of 5 eV. Can it be used as solar cell material?

Working principle – 1. Excess electron-hole pairs

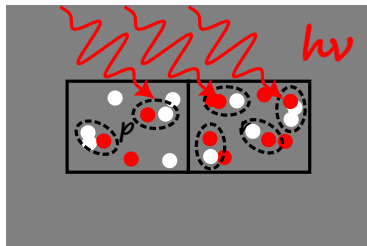


- Upon illumination with photons with energy greater than the band gap, optical absorption takes place.
- This results in the generation of excess electron-hole pairs throughout the device.

Key Insight

Optical absorption generates excess electron-hole pairs.

Working principle – 2a. Illumination away from depletion region

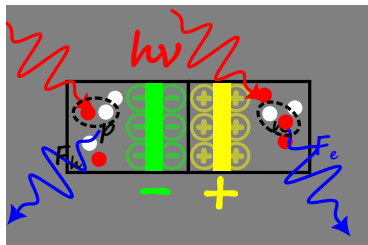


- In the neutral regions far away from the depletion region, the excess charge carriers again undergo radiative recombination and release photons.

Key Insight

Away from depletion region, generation of excess charge carriers is followed by radiative recombination.

Working principle – 2b. Illumination at depletion region

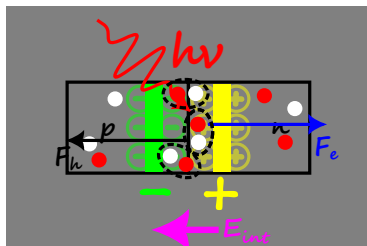

- At the depletion region also, the excess charge carriers are generated.
- However, before they undergo radiative recombination, the built-in electric field sweeps them out of the depletion.

Key Insight


At the depletion region, separation of excess charge carriers prevents radiative recombination.

Working principle – 3. Photo-voltage

Definition


Photovoltage, also called photo e.m.f.^a is the voltage appearing across the device due to the separation of excess charge carriers.

^ae.m.f. stands for electro motive force

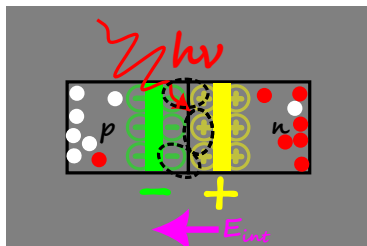

- The swept excess electrons and holes **accumulate** at the n region and p region edges respectively
- The accumulation of positive charge at the p-edge and negative charge at the n-edge leads to the generation of a voltage
- Since the source of voltage is illumination of photons, it is called **photovoltage**.

Solar cell – $I - V$ characteristics

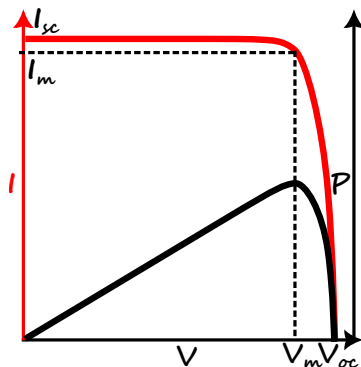

Output electrical power – Fill factor

- From the $I - V$ characteristics of solar cell, it is evident that the maximum current generated cannot exceed the short circuit current I_{sc} and the maximum voltage generated cannot exceed the open circuit voltage V_{oc} .
- The maximum power that can be generated should be less than the product of I_{sc} and V_{oc} .
- This is a material property. If the

Input optical power – Solar irradiance

Definition

Solar irradiance is the solar power incident on the Earth's surface per unit area..

- Since sun is the major source of light energy, the input power is determined by the properties of sun.
- Sun is emitting photons of various wavelengths per unit time. Each photon with a given wavelength has an energy given by the Planck's law.
- Summing up all the photons gives the total energy radiated by Sun per unit. This is the Wattage or power output.
- However, we are only receiving a fraction of the Sun's power. As the separation from the Sun increases the power decreases as reflected in the solar irradiance given by the
- At the separation of Earth, the solar irradiance is of of the order of 1360 W m^{-2} .
- Due to the Earth's atmosphere, there are losses and solar irradiance is nearly 1000 W m^{-2} at noon

Practical considerations – Solar cell efficiency

Definition

Conversion efficiency is defined as ratio of output electrical power to input optical power.

- To harness solar energy, the following practical limitations need to be considered.
- All the power cannot be harnessed as the optical absorption by a solar cell has a cut off wavelength due to the energy band gap.
- The photons with energy greater than energy band gap also generate electron-hole pairs. However, the difference of photon energy and band gap is dissipated as heat.
- The sum total of all these considerations is that a fraction of incident optical power is converted into electrical power and is given by the conversion efficiency η as

$$\eta = \frac{P_{\text{out}}}{P_{\text{in}}} \times 100$$

Solar cell – applications

PRAGYAN ROVER



Weight
27 kg



Power
50 W



Payloads
2




Dimensions
0.9 x 0.75
x 0.85 m



Mission Life
1 lunar day

Chandrayaan 2's rover is a 6-wheeled robotic vehicle named Pragyan, which translates to 'wisdom' in Sanskrit. **It can travel up to 500 m (0.5 km) at a speed of 1 centimetre per second, and leverages solar energy for its functioning.** It can communicate with the lander.



Problem

From the data in above figure, estimate the conversion efficiency of material used in Pragyan rover.

Problems on solar cell

Problem

A silicon solar cell under standard test conditions has $I_{sc} = 35 \text{ A cm}^{-2}$, $V_{oc} = 0.60 \text{ V}$, Fill Factor (FF) = 0.80. The incident power is 100 mW cm^{-2} . Calculate the efficiency of the cell.

Problem

A solar panel has an efficiency of 18% under standard irradiance of 1000 W m^{-2} . What panel area is required to generate 200 W of electrical power?

Problem

Each silicon solar cell has an open-circuit voltage of 0.60 V under illumination. How many such cells are needed in series to obtain an open-circuit voltage of approximately 18 V?

Fun problems

Problem

An alien ship crashlanded onto Earth's surface. From the debris, the solar panel used for power generation is found to have a band gap of 5 eV. Estimate the temperature of the alien Sun.

Problem

The power rating of solar panels of Pragyan rover is 50 W. If ISRO is successful to transport it onto Mars, what will be its Martian power rating?