Ex-09
5/10/2024

Implementation Of Subnetting In Cisco Packet Tracer Simulator

Aim:-

* To implement the subnetting in CISCO packet Tracer simulator.

Creating A Network Topology:-


* The first step in implementing classless IP subnetting is to create a network topology in packet tracer.

Adding The Devices:-

* Once we have created our network topology, we can add devices to it.
* Here, we will be adding routers, witches and PCs
* To add device, select the device from the bottom left corner & drag it onto the network topology.

Subnetting:-

* To subnet the network address of 192.168.1.0/24 to provide enough space for atleast 5 address for end devices, the switch and the router, we can use a 127 subnet mask.
* This will give us 8 subnets with 30 hosts address each

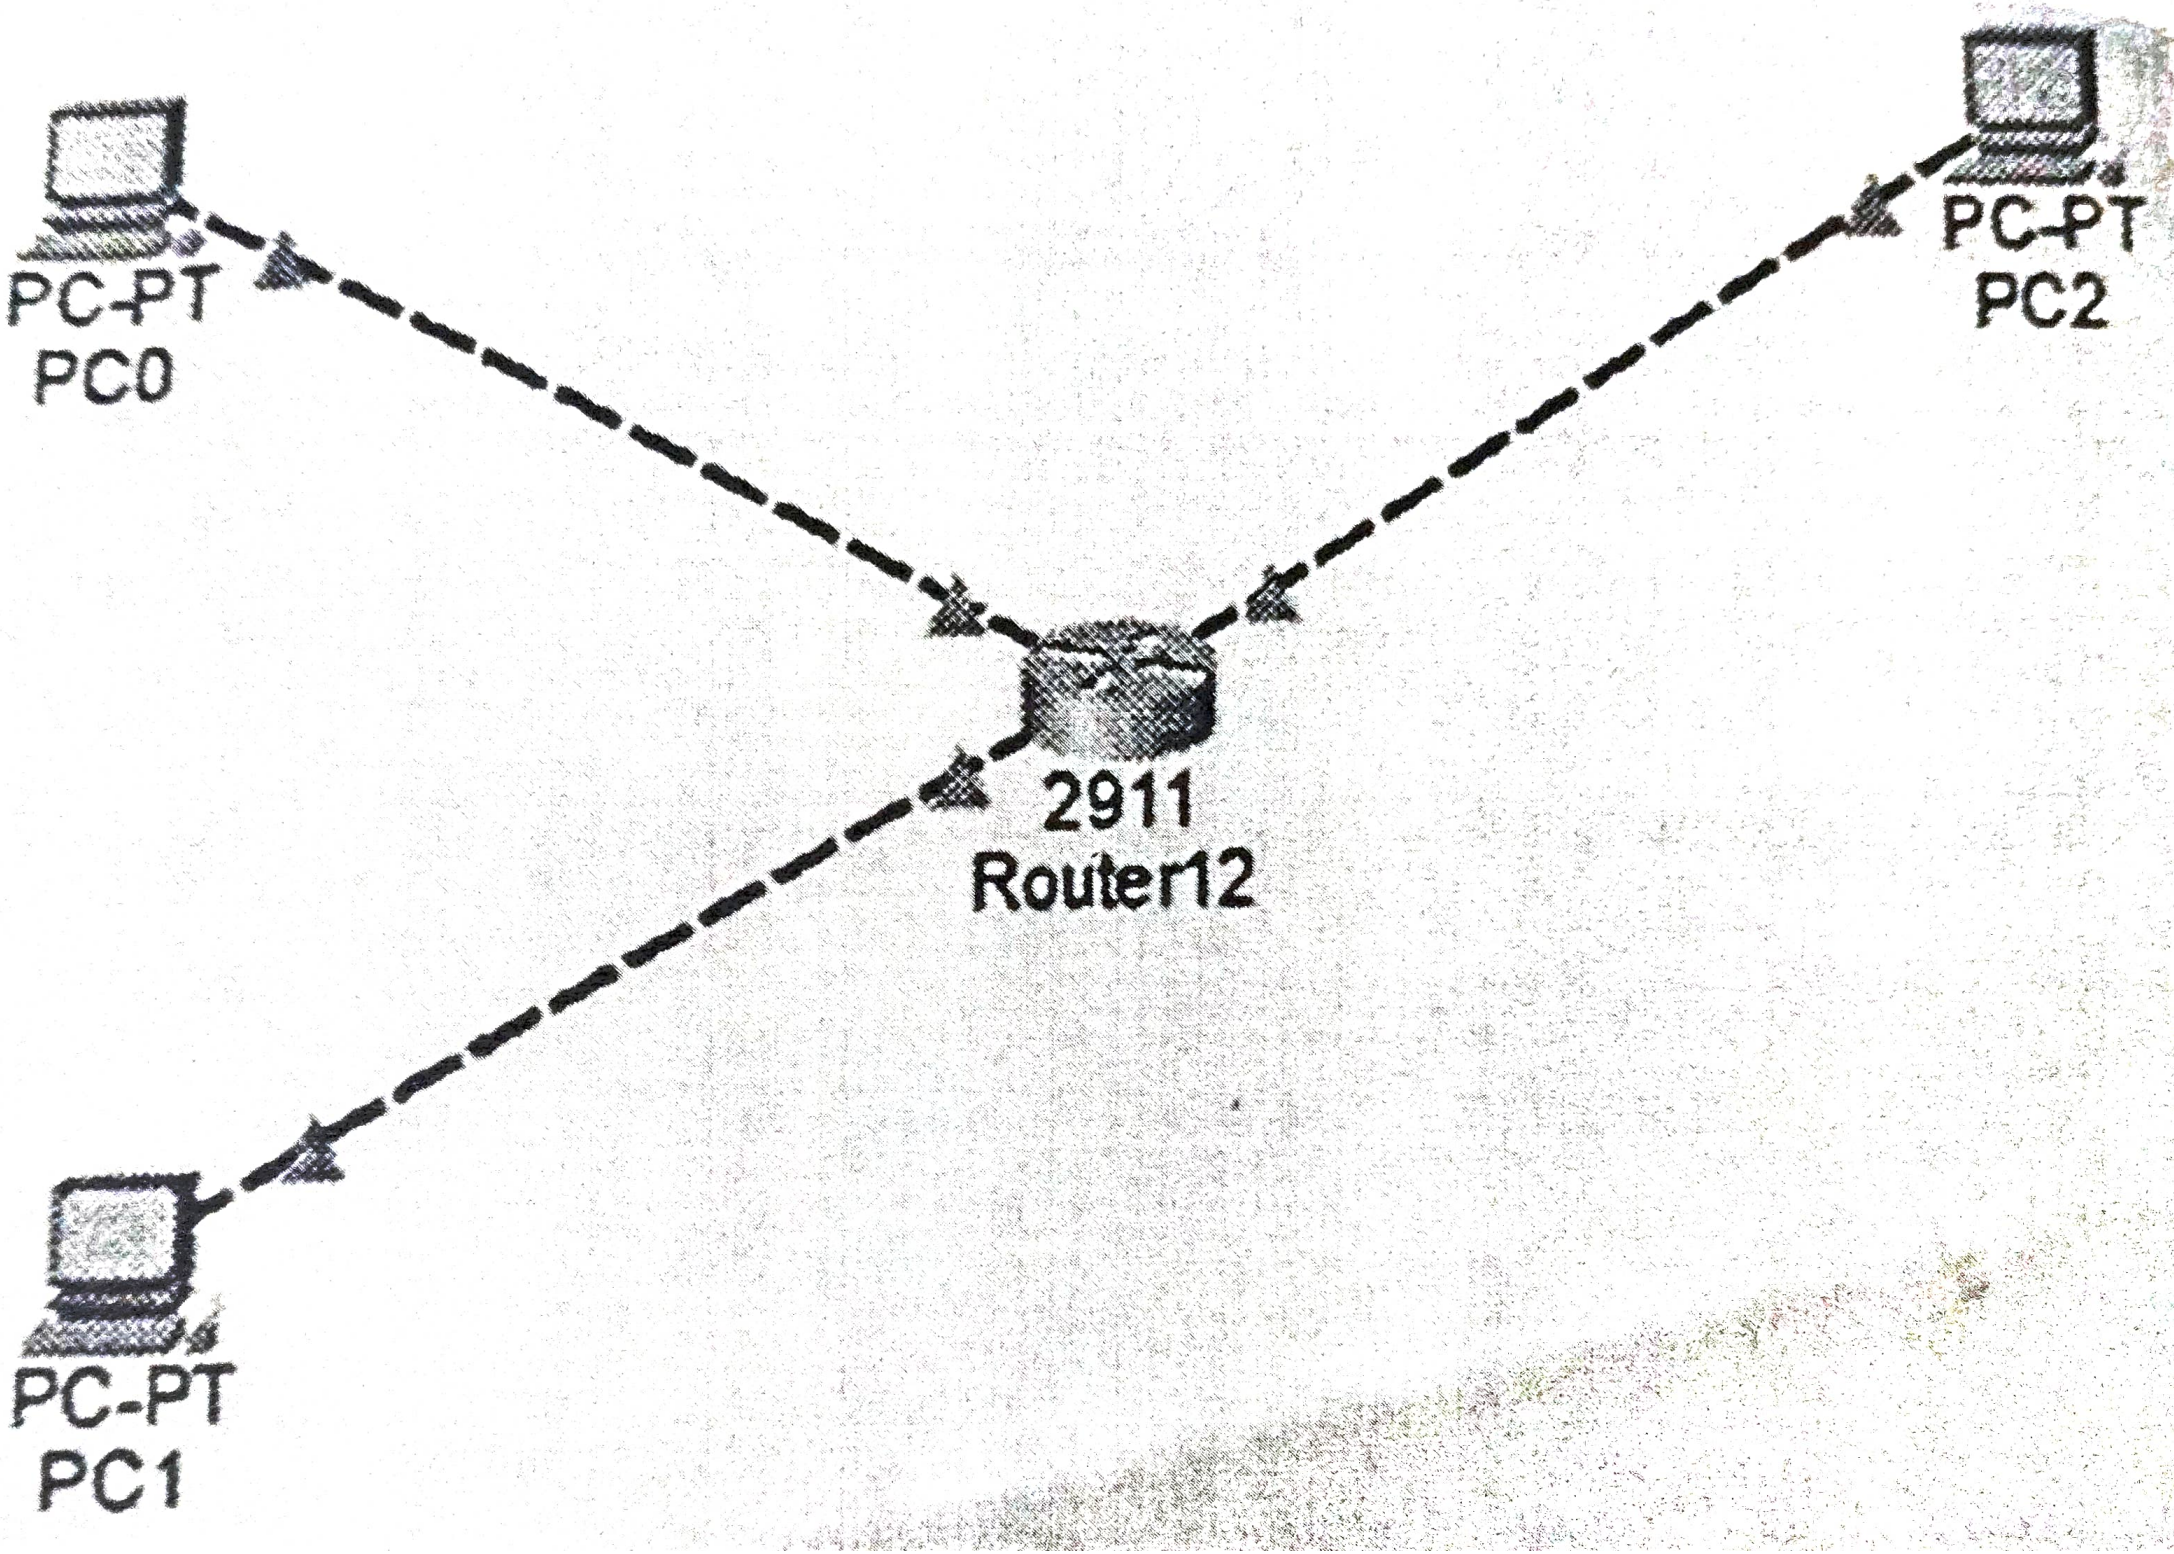

PC-PT
PC0
PC-PT
PC2
2911
Router12
PC-PT
PC1

Config Attributes

MODULES
HWIC-1GE-SFP
HWIC-2T
HWIC-4F-SW
HWIC-8A
WIC-Cover
UH-SMD

Physical Device View

Zoom In | Original Size | Zoom Out

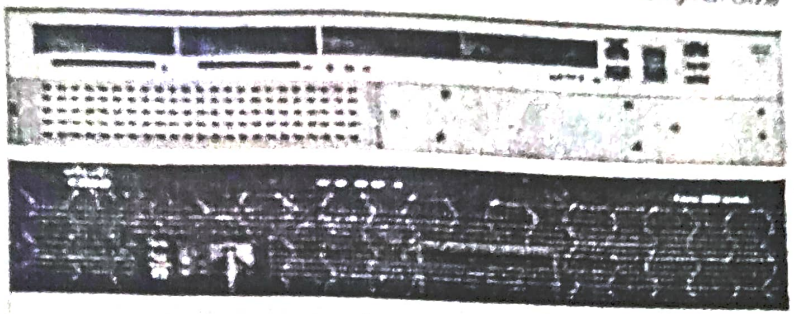

Customize Icon in Physical View




Customize Icon in Logical View



HWIC-1GE-SFP is a single-wide HWIC with one Small Form-Factor Pluggable (SFP) slot. The SFP slot can be populated with Cisco copper and optical Gigabit Ethernet SFPs to provide 1-port Gigabit Ethernet connectivity on all Cisco Integrated Services Routers



Top

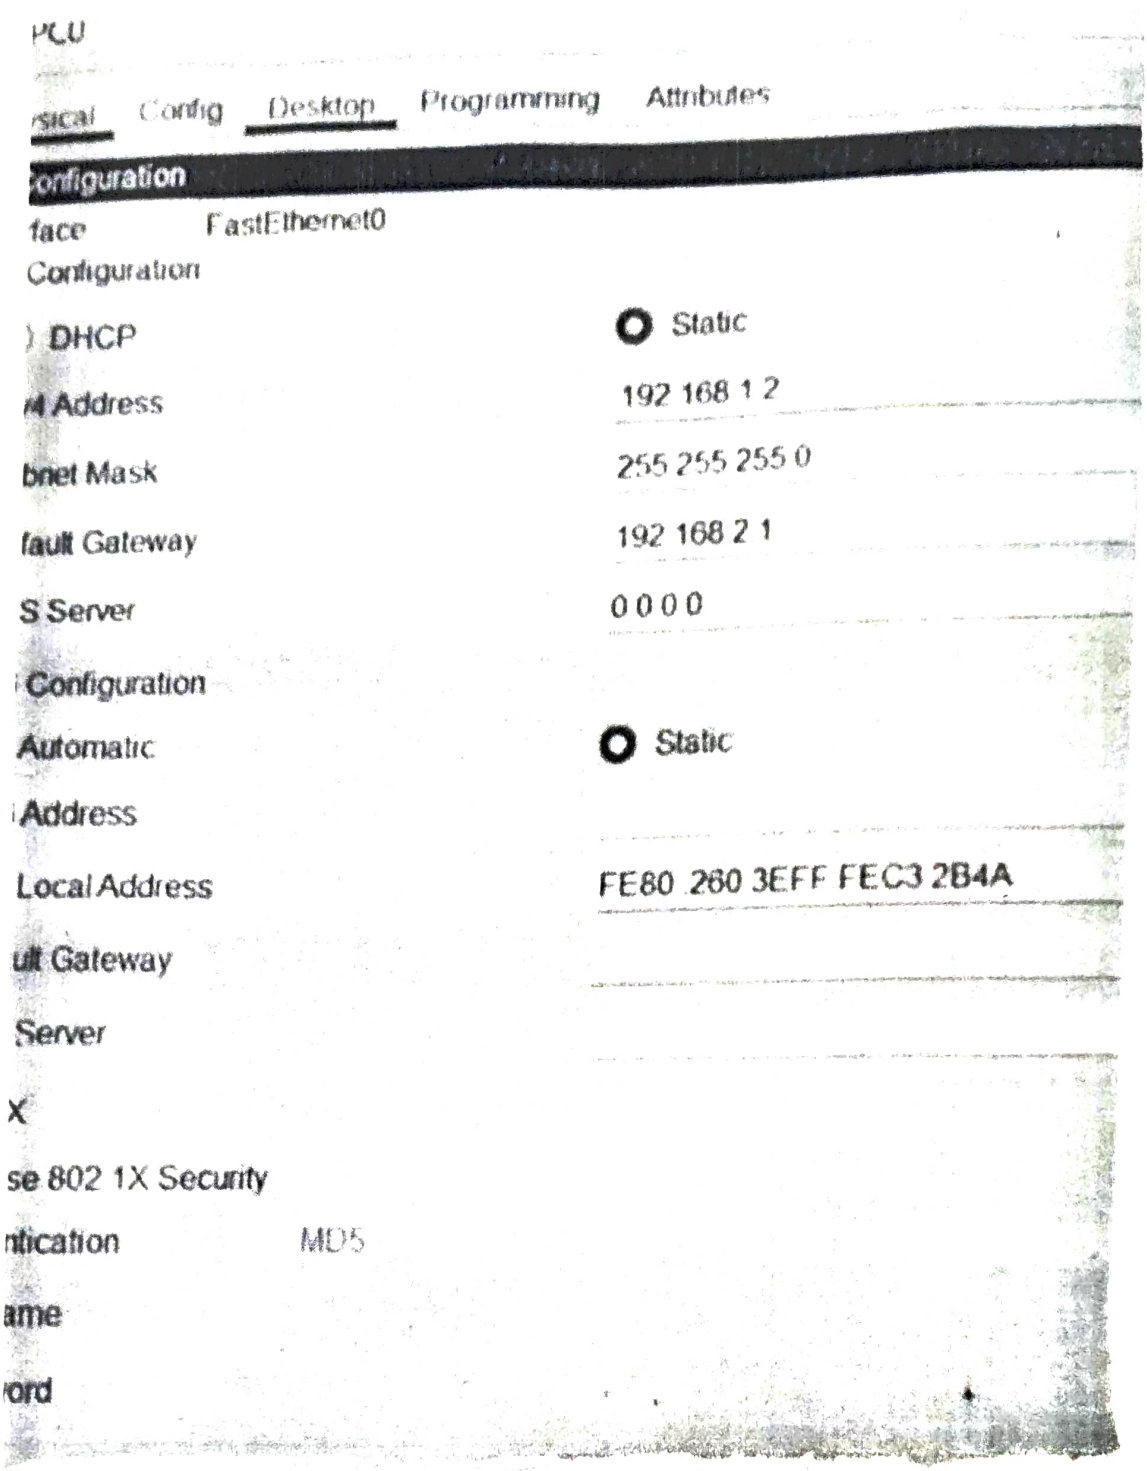

RESULT:-

* Implementation of subnetting has been done successfully using cisco packet tracer.