



1

2

3

4

Recommended P.C.B Layout
TOLERANCE±0.05

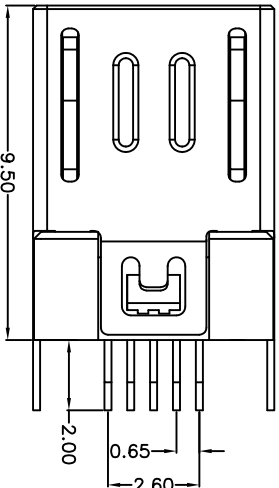
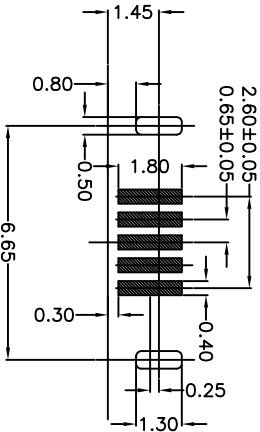


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

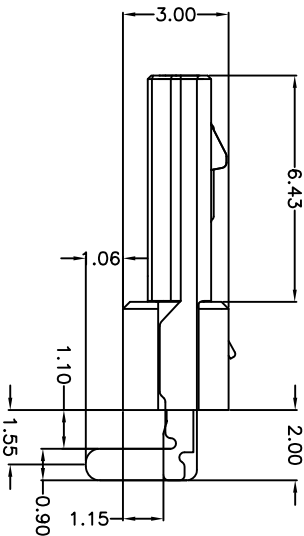

PART NUMBER

22TCH - 0 5 * T - 1 * B L

SERIES

NO. OF POS.

LEAD FREE

1:TRAY
2:TAPE REEL PACKAGE

CONTACT PLATED OPTION
TIN PLATING ON SOLDER TAIL

- 1: GOLD FLASH
- 2: 5u" GOLD
- 4: 15u" GOLD
- 6: 30u" GOLD

CONTACT NUMBER	SIGNAL NAME
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	ID
PIN 5	GND

ZK-TEK

ZK-TEK TECHNOLOGIES CO., LTD.

Web Site : <http://www.zk-tek.com>

LINEAR: JX±0.30 JYX±0.20 JYX±0.10

APPROVALS

ANGLES: ±3°

DRAWN:

Wang

CHECKED:

Shen

APPROVED:

James



10208

SERIES: USB CONNECTOR SERIES

TITLE:

MICRO USB B TYPE, PCB MOUNT, SMT,
METAL SHIELD, MALE, CUT BOARD TYPE 3

SIZE: VERSION: DWG NO.

A4

A

22TC-011

SCALE:

NONE

UNIT:

mm

SHEET: 1 OF 1

A	RELEASE	2013.04.10
REV.	DESCRIPTION	DATE

1

2

3

4