


Encoder-Top view

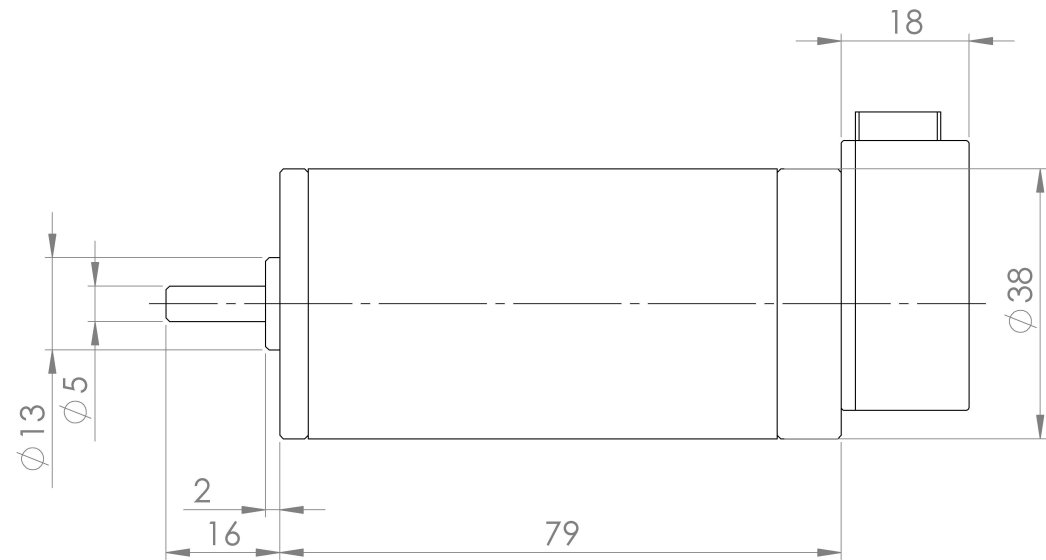

Dimensions in mm

ZYTD-38SRZ-R1

24 V

4000 rpm

5.1 A maximum current

3000 g·cm maximum torque

HKT30 encoder

60 mA current consumption

1600ppr, 100 kHz maximum pulse rate

-25 to 85 ° C operation

