


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

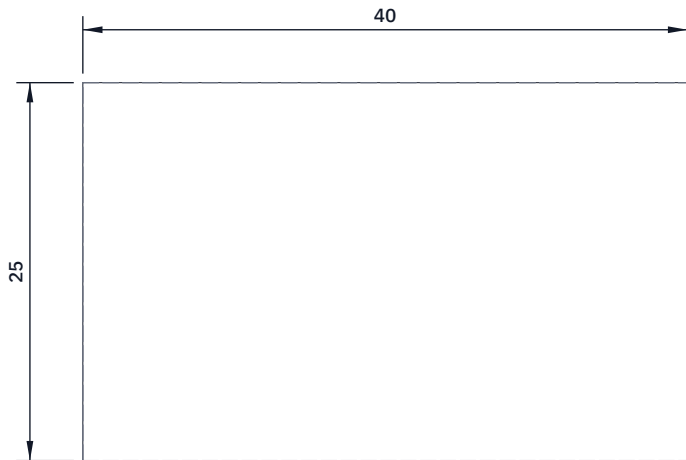


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

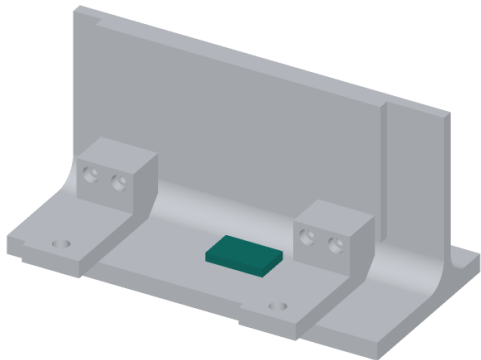

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 40 mm lengths of 25 x 6 mm steel flat bar.
Grind one 40 x 25 face flat and clean to bright metal; this is where the dummy gauge goes. Round the edges lightly.
Bond a gauge of the same type and batch as the active gauge to the middle of the bright face, the same way round as the active gauge.
Solder its leads, coat it with the same coating as the active gauge, and fit a cover patch.
Fit: set it on the flange top, its centre 35 out from the web face, on a bed of neutral-cure silicone, so it takes the steel's temperature but none of its strain. Never glue it rigidly.
Check: the coupon can be lifted by hand once the silicone has cured.

BRIDGEPULSE

github.com/BoujeeEnjinia1701/bridgepulse

BridgePulse dummy gauge coupon (make 2): making sketch

DRAWING NO. BRP-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Steel flat bar 25 x 6 mm, the same steel grade as the girder if known					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand