


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

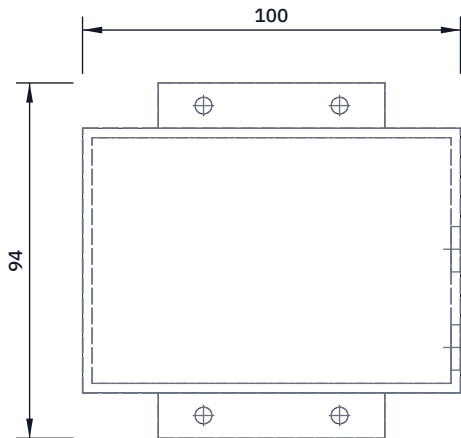


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

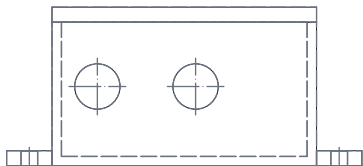

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

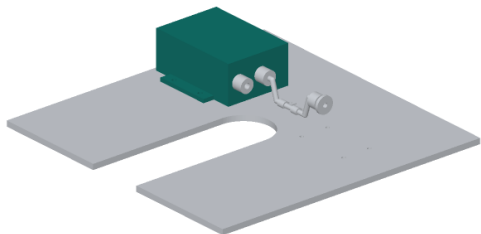

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Buy a flanged IP65 box about 100 x 70 x 42 mm with a gasketed lid; its flange holes go 82 mm apart across the box and 36 mm apart along it (or move the plate holes to suit your box).
Drill two 12 mm holes in the end wall that faces the rod, both 21 mm above the box floor's underside: one 12 mm and one 38 mm from the box side nearest the plate slot.
The first takes the M12 gland for the coiled sensor cable, the second the gland for the reel cable.
Pilot drill 3 mm, open with a step drill at low speed, deburr.
Inside: the three-AA holder on the floor at the far end, the logger board near the glands, on double-sided foam tape or the box's own bosses.
Fit: flanges flat on the plate, four M4 pan-head screws into the tapped plate holes.
Check: the lid gasket seats all round; both glands tighten on their cables.

CONEPRO

github.com/BoujeeEnjinia1701/conepro

ConePro logger box: drilling sketch

DRAWING NO. CNP-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP65 ABS or polycarbonate box with flanges					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	