




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

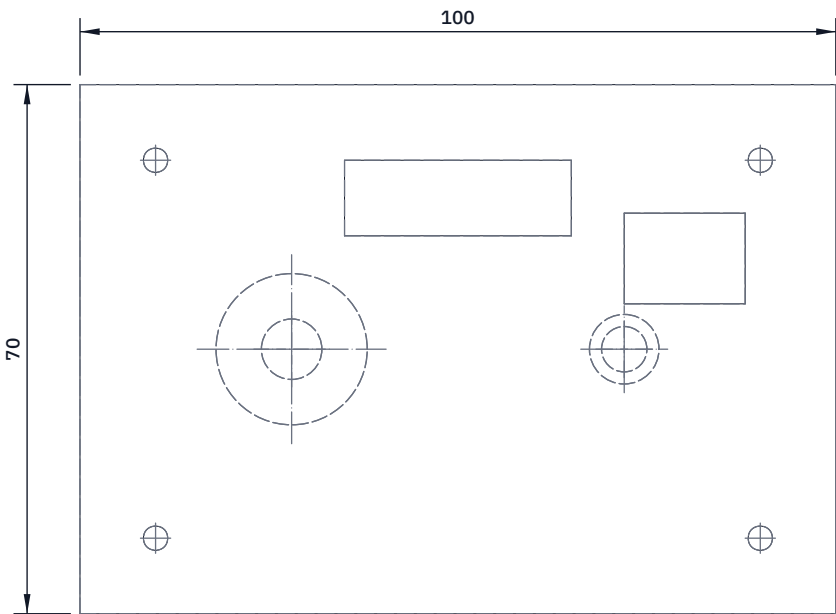


TOP VIEW
Scale 1:1; looking down (along -Z)

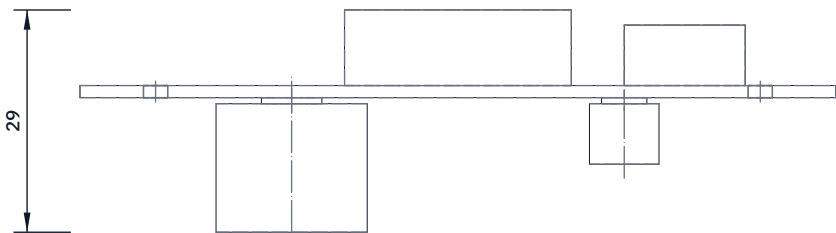

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

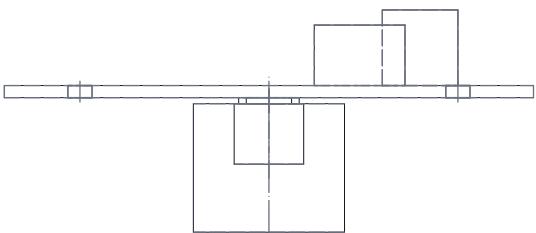

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

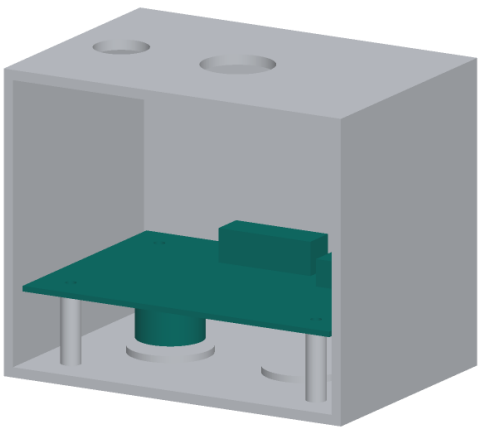

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut prototype board to 100 x 70 mm. Drill four 3.2 mm holes 10 mm in from each end and 10 mm in from the long edges (80 x 50 mm apart).

Solder the catalytic sensor under the board, centred 28 mm from the left end; the MOS sensor under it 28 mm from the right end, both on the long centre line. They must sit over the two ports.

Seat each sensor with 0.8 mm under its body: the catalytic can's face then sits 2.2 mm above its disc. Use a 0.8 mm shim while soldering.

On top: the bridge supply and heater regulator and a 4-way terminal for the cable (24 V, 0 V, catalytic output, MOS output).

No flux cleaner or silicone near the sensors: both poison them.

Check: the four holes line up with the standoffs in the box.

H2GUARD

github.com/BoujeeEnjinia1701/h2guard

H2Guard sensor board with both sensors: making sketch

DRAWING NO. HGD-DWG-102		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Prototype board 100 x 70 x 1.6 mm; bought sensors				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	