



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Dry-contact relay added below the driver	2026-10-02	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

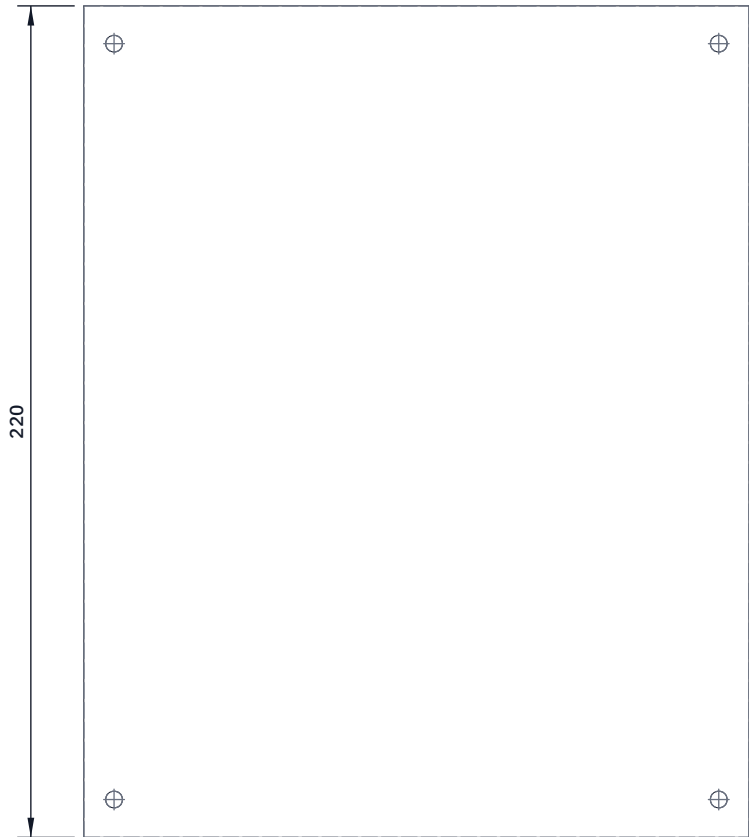


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

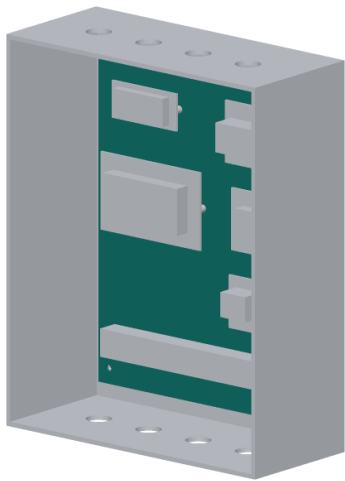

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 176 x 220 mm from 2 mm aluminium sheet; round the corners.

Four 4.4 mm holes at the box's bosses: 80 mm each side of the centre across, 100 mm each side up and down (measure your box).

Lay the modules on it as the inset and step 5 show: microcontroller upper left, trip board below it, relays upper right, driver below, dry-contact relay below that (45 right, 38 down), terminal strip along the bottom, 80 mm below centre.

Mark each module's holes through the module; drill 3.2 mm for M3 screws on 6 mm nylon standoffs.

Deburr both faces so no chip can short a module.

Fit: four M4 x 10 self-tapping screws into the bosses.

Check: flat within 0.5 mm; the plate sits on all four bosses.

H2GUARD				github.com/BoujeeEnjinia1701/h2guard			
H2Guard controller mounting plate: making sketch							
DRAWING NO. HGD-DWG-106			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium sheet 2 mm, 5052 or 6061 class							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							