


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

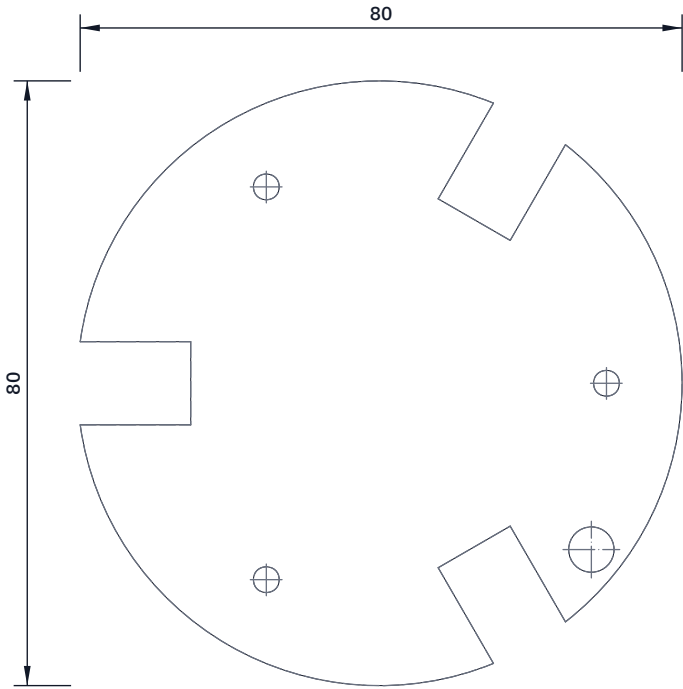


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

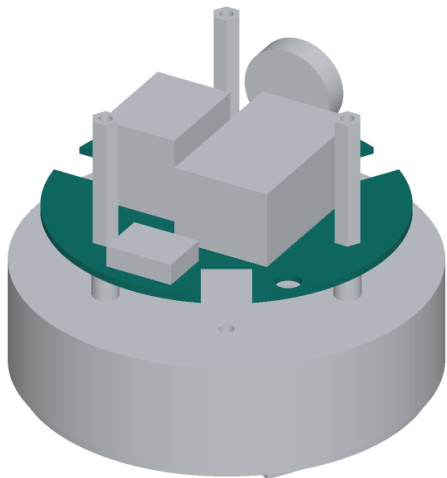

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut an 80 mm disc from plated-hole prototype board (2.54 mm grid):
scribe the circle, cut outside it with a coping saw, file to the line.
Three stack holes 3.4 mm on a 60 mm circle at 0, 120 and 240 degrees.
Three notches 11 mm wide, from 25 mm radius out to the edge, at 60, 180 and 300 degrees: the dome bosses pass up through them.
Parts, from the mains board layout picture: supply 23 x 38 mm on the centre; relay on the pole side; varistor and thermal fuse at the left edge and metering module at the right edge, seen from the pole.
6 mm hole at 28 mm toward the street, 22 mm right: low-voltage leads.
Keep 6 mm of bare board between mains tracks and the 12 V side.
Fit a 3-way mains terminal block and a 6-way harness header.
Fit: sits on three 12 mm spacers; standoffs screw on top.
Check: flat; the dome bosses pass the notches freely.

LAMPNODE

github.com/BoujeeEnjinia1701/lampnode

LampNode mains board: making sketch

DRAWING NO. LPN-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Plated-hole FR4 prototype board 1.6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand