



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 2:1; looking down (along -Z)

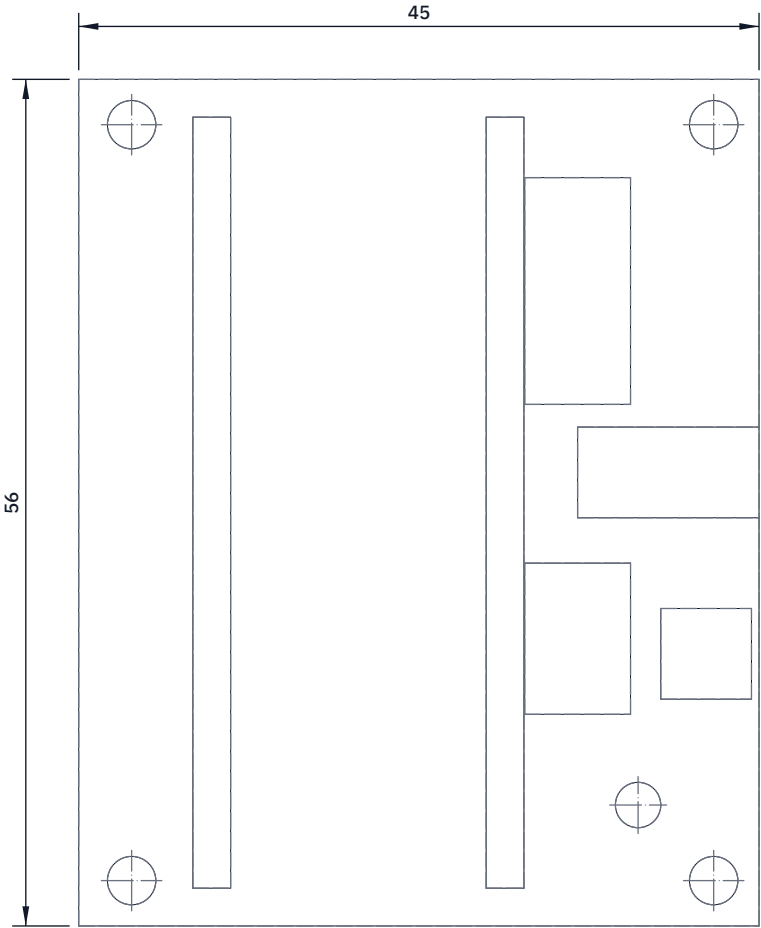

FRONT VIEW
Scale 2:1; looking at the front (along +Y)

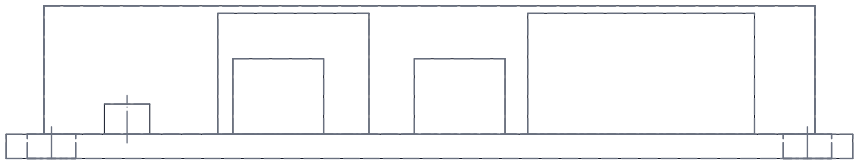

RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

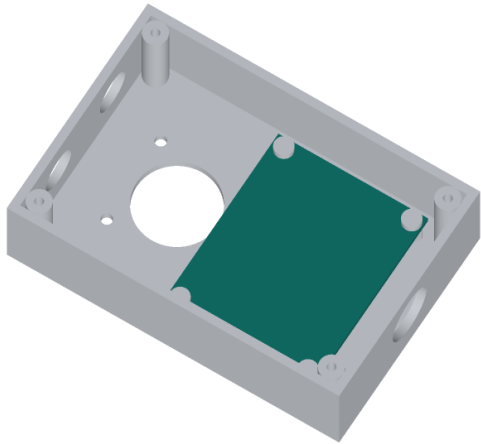

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a 45 x 56 mm piece of perfboard; file the edges smooth.

Four 3.2 mm holes, 3.5 mm in from the left edge, 3 mm from the right, 3 mm in from the front and back edges (38.5 x 50 mm apart).

Left part: two 20-pin header sockets 19.4 mm apart (centre to centre), 51 mm long, for the controller board.

Right part: the 3.5 mm jack for the CT facing the right end, the 5 V and probe screw terminals, the button, and the LED 30 mm right of the box centre and 20 mm toward the front.

Interface circuit as the wiring diagram: 1.50 V bias divider and filter for the CT, series resistor and clamp diodes.

Fit: on four 5 mm hex stand-offs screwed to the box floor; the board stays 4 mm clear of the right gland nut.

Check: continuity and no shorts before the controller goes in.

MACHINEPULSE

github.com/BoujeeEnjinia1701/machinepulse

MachinePulse carrier board: making sketch

DRAWING NO. MPL - DWG - 105		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Perfboard 1.6 mm, 2.54 mm pitch, cut to 45 x 56 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	