


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

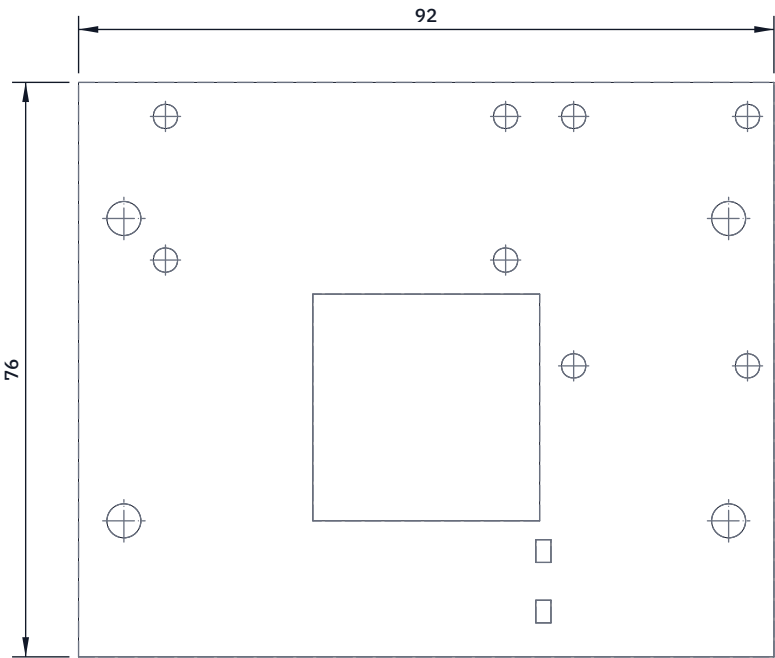


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

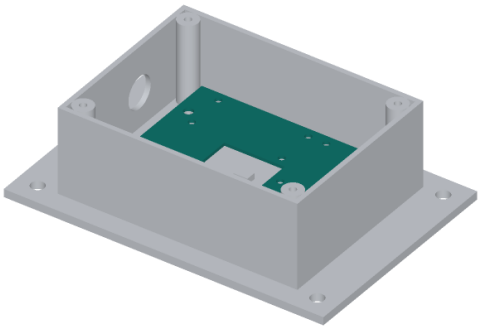

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 92 x 76 mm, 1.5 mm aluminium; deburr all edges.
Window 30 x 30 mm over the IMU, centred 5 mm right of centre:
drill 6 mm in each corner, cut between with a piercing saw, file.
Fixing holes: four 4.5 mm, 80 x 40 mm apart, matching the plate.
Module holes: 3.2 mm; mark them through each module (about
23 x 33 mm for the converter, 45 x 19 mm for the controller).
Tie slots: two 2 x 3 mm, 15.5 mm forward of centre, 24 and
32 mm right of centre, for the supercapacitor's cable tie.
Fit: sits on the four hex standoffs 8 mm above the box floor,
held by four M4 x 6 screws; 1.5 mm clear of the walls and
pillars, 4.5 mm clear of the gland locknut.
Check: drops onto the standoffs without touching a wall.

POTHOLELOG

github.com/BoujeeEnjinia1701/potholelog

PotholeLog module carrier plate: making sketch

DRAWING NO. PHL - DWG - 103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium sheet 1.5 mm, 5052					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	