




| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-10-02 | AC |

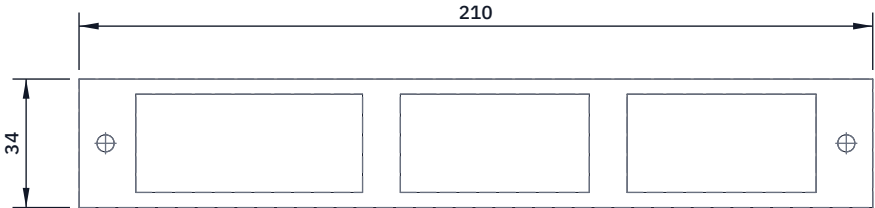


TOP VIEW  
Scale 1:2; looking down (along -Z)

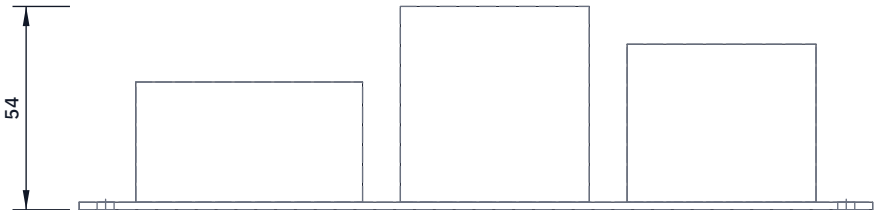

FRONT VIEW  
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW  
Scale 1:2; looking at the right side (along -X)

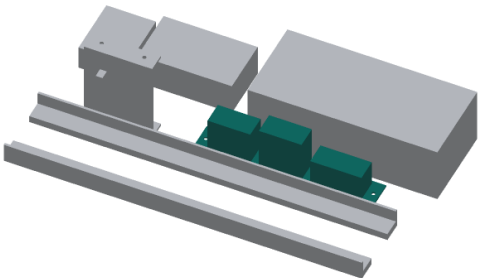

WHERE IT GOES  
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 210 x 34 mm from 2 mm sheet.  
Two 4.5 mm holes for the floor screws, 7 from each end, 17 from either long edge.  
Lay out on it, left to right: the 30 A main fuse holder, the 20 A DC breaker, then the inverter relay with its 47 ohm pre-charge resistor.  
Drill each to its own holes, M4 or M3 with nyloc nuts.  
Fit: on the floor between the inverter and the pack bay, two M4 button heads from below with nyloc nuts on top.  
All three parts must be rated 60 V DC or more; the fuse holder and fuse at least 1 kA breaking capacity.  
Check: 6 mm clear of the inverter and 14 mm clear of the runners.

|                                                                                           |             |                                                                                                     |           |                                       |                 |                                             |                |
|-------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------|-----------|---------------------------------------|-----------------|---------------------------------------------|----------------|
| POWERBOX                                                                                  |             |                                                                                                     |           | github.com/BoujeeEnjinia1701/powerbox |                 |                                             |                |
| PowerBox protection plate: making sketch                                                  |             |                                                                                                     |           |                                       |                 |                                             |                |
| DRAWING NO.<br>PBX-DWG-113                                                                |             |                                                                                                     | REV<br>P1 |                                       | SHEET<br>1 of 1 |                                             | SIZE<br>ANSI B |
| SCALE<br>1:2                                                                              | UNITS<br>mm | PROJECTION<br> |           | DATE<br>2026-10-02                    |                 | DRAWN<br>Amish Chadha                       |                |
| MATERIAL / NOTES<br>5052 aluminium sheet 2 mm, with bought fuse holder, breaker and relay |             |                                                                                                     |           |                                       |                 |                                             |                |
| Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com                        |             |                                                                                                     |           |                                       |                 | Generated from cad/src; do not edit by hand |                |