

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

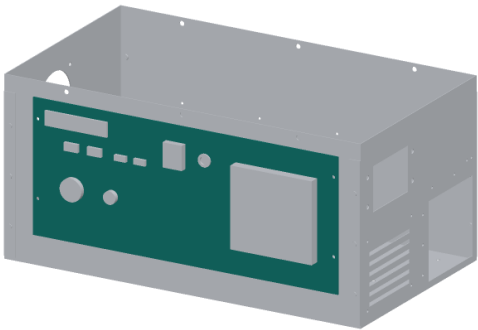

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 394 x 164 mm. Cut-outs from the panel cut-out layout picture, measured from the left and bottom edges:

USB-C 16 x 8 (2), USB-A 13 x 5 (2), 12 V socket 24 diameter, barrel socket 12, switch 21 x 26, wake button 12, AC outlet 60 x 60, display 70 x 14. Check each against the part's datasheet first.

Four 4.5 mm screw holes: 6 and 388 from the left edge, 44 and 139 up.

Fit: the modules fit their cut-outs with their own nuts or clips; the plate covers the front wall window, 17 over at the ends, 12 top and bottom; four M4 screws into the rivet nuts.

Print the port labels before fitting the modules.

Check: every module's back clears the window edges.

POWERBOX

github.com/BoujeeEnjinia1701/powerbox

PowerBox output panel plate: making sketch

DRAWING NO. PBX-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 5052 aluminium sheet 2 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand