


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Interface v0.4 catch geometry added to the notes	2026-10-02	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

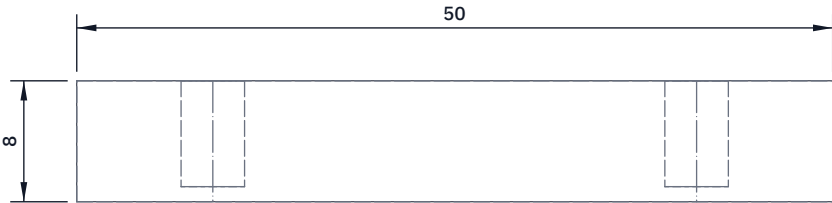


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

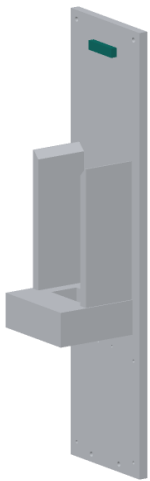

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 50 long from 12 x 8 flat bar; square and deburr.
The bottom face is the latching face: keep it flat and square.
Two M5 tapped holes 7 deep in the back face, 16 each side of centre, half way up.
Fit: back face flat on the plate front, centred, 544 up from the plate bottom; two M5 countersunk screws from behind.
Interface v0.4 catch geometry (every receiver the same):
latching face 1 above the pawl top; reach 8 from the plate; engagement 4; pawl projection 6; pawl travel 5. It ends 2 from the pack's back; the retracted pawl clears it by 1.
Check: lift the seated pack by its handle: the pawl stops it.

SWAPCELL

github.com/BoujeeEnjinia1701/swapcell

SwapCell latch catch: making sketch

DRAWING NO. SWC-DWG-112			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel flat bar 12 x 8 mm, zinc plated					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand