



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

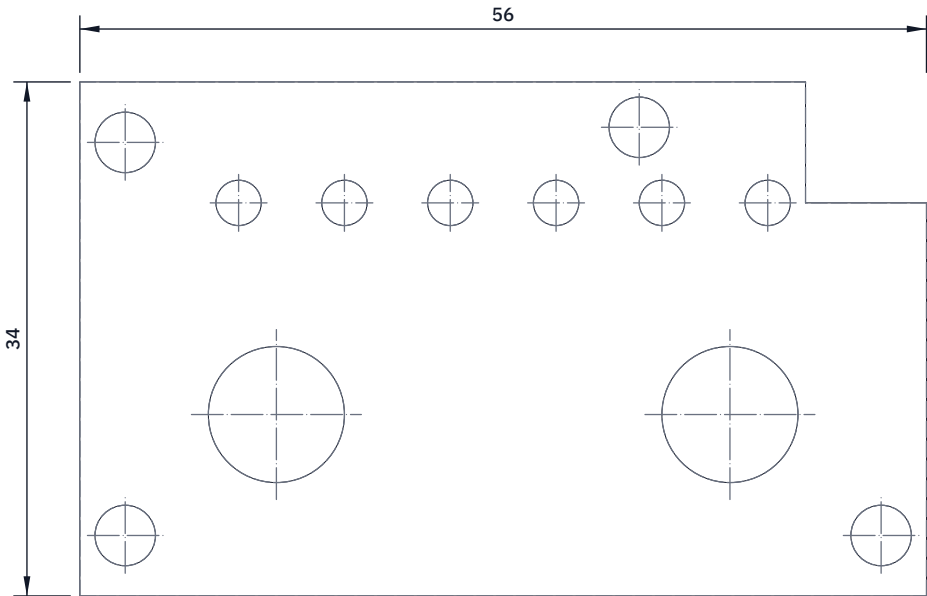


TOP VIEW

Scale 2:1; looking down (along -Z)

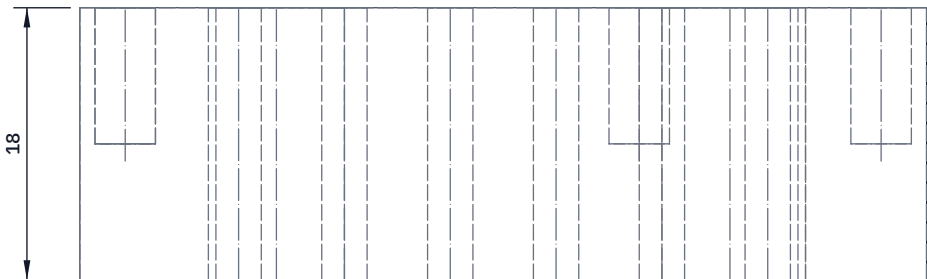


FRONT VIEW

Scale 2:1; looking at the front (along +Y)

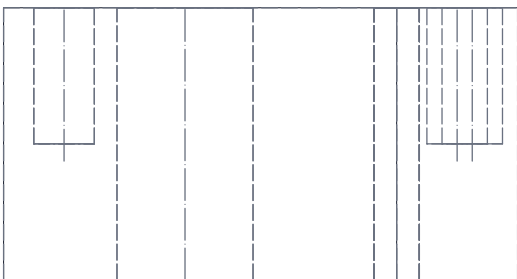

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

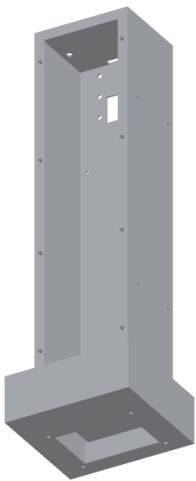

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print 56 x 34 x 18 with the key notch, 8 x 8, at the back right corner.

Power contact holes 9 dia through, 15 each side, 12 in from the front edge; six signal holes 3 dia through at 7 pitch, 26 in.

Check the hole sizes against the contacts bought before printing.

Four M3 heat-set inserts in the top face, 8 deep: 25 each side

4 in from the front edge; 25 left and 9 right at the back.

Press in the contacts from the top with their wires fitted; pot the six signal contacts. The INTERLOCK contact is shortest.

Fit: top face flat on the connector face, centred across, 8 toward the back; four M3 screws from inside the tray; wires up through the lead opening; a bead of sealant round the opening.

Check: the key notch is at the back right seen from the lid.

SWAPCELL

github.com/BoujeeEnjinia1701/swapcell

SwapCell plug shroud: making sketch

DRAWING NO. SWC-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Printed flame-retardant PC-ABS or PA, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	