



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

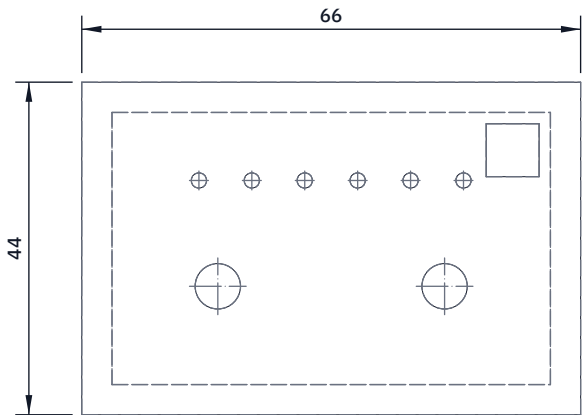


TOP VIEW

Scale 1:1; looking down (along -Z)

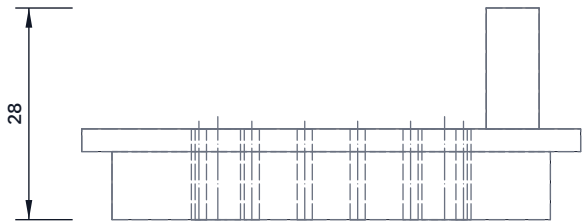


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

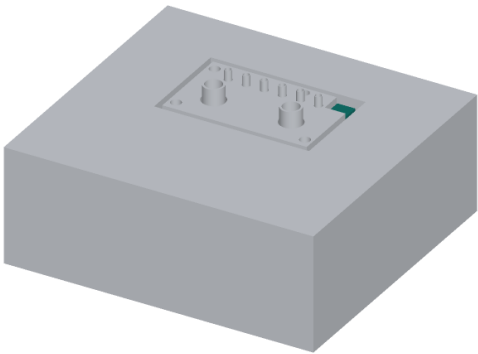

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print a body 58 x 36 x 12 with a 3 mm flange 66 x 44 at its top.

Key post 7 x 7, 16 tall, at the back right corner of the top face.

Pin holes through, matched to the plug: power 15 each side,

13 in from the front of the body; signal at 7 pitch, 27 in.

Press in the pins: power pins 10 above the face (PACK- 11),

signal pins 8, the INTERLOCK pin only 5, so it mates last.

Solder the 10 kOhm coding resistor from INTERLOCK to SGND.

Fit: drops into the cavity from below; the flange stops under the pocket ledge with 3 mm to float each way; the foam pad and retainer plate hold it up.

Check: it moves 3 mm each way by hand and springs back up.

SWAPCELL

github.com/BoujeeEnjinia1701/swapcell

SwapCell receptacle shroud: making sketch

DRAWING NO.

SWC-DWG-113

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:1

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Printed flame-retardant PC-ABS or PA, 100 % infill