



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

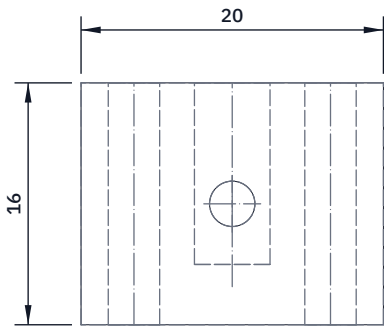


TOP VIEW

Scale 2:1; looking down (along -Z)

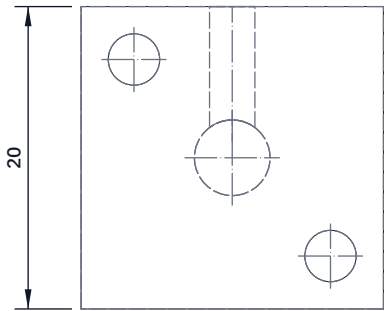


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

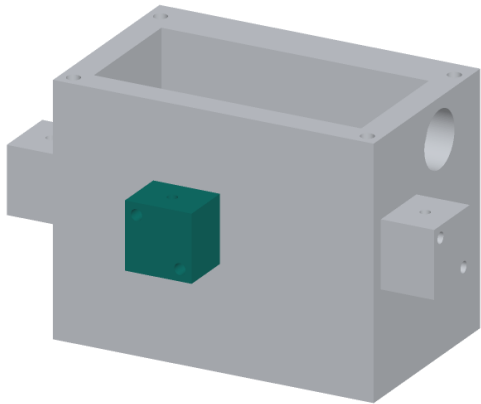

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make three the same, 20 x 20 x 16 mm, in black ASA.
A 5 mm bore on the axis from the wall face, 12 deep, for the LED (left wall) or a light-to-frequency detector (front and right).
A 3 mm hole from the bore out of the top for the leads.
Two 3.4 mm holes at opposite corners, 3.5 in from the edges, for M3 screws into tapped holes beside each window.
Seat the LED or detector against the window disc, pot it in black epoxy so no daylight leaks in, and lead the wires out of the top.
Fit: face flat on the cell wall, centred on its window.
Check: in the dark, the detector reads the same with the room light on and off.

WATERWATCH

github.com/BoujeeEnjinia1701/waterwatch

WaterWatch optics holder (make 3): making sketch

DRAWING NO. WWT-DWG-107		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Black ASA, 3D printed, 100 % infill, 20 x 20 x 16 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	