




POWER LED




SIGNALING LED




XIAO ESP32-C3

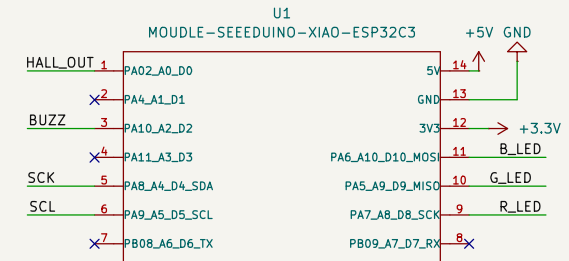


OLED HEADER




BUZZER



HALL EFFECT SENSOR

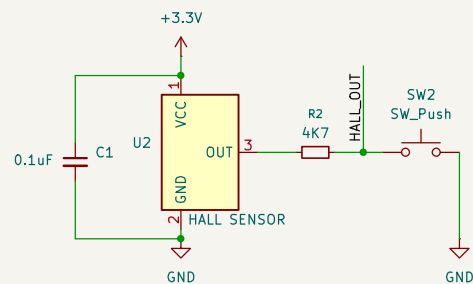

MOUNT HOLES



Seeed Studio XIAO ESP32C3 is an IoT mini development board based on the Espressif ESP32-C3 WiFi/Bluetooth dual-mode chip, featuring a 32-bit RISC-V CPU that delivers powerful computing performance with its efficient architecture. It has excellent radio frequency performance, supporting IEEE 802.11 b/g/n WiFi, and Bluetooth 5 (BLE) protocols. This board comes included with an external antenna to increase the signal strength for your wireless applications. It also has a small and exquisite form-factor combined with a single-sided surface-mountable design. It is equipped with rich interfaces and has 11 digital I/O that can be used as PWM pins and 4 analog I/O that can be used as ADC pins. It supports four serial interfaces such as UART, I2C and SPI

The heart of this innovative device is the Seeed Studio XIAO ESP32C3 microcontroller based on the Espressif ESP32-C3 MCU.

PlastiBytes

Sheet: /
File: PlastiSense.kicad_sch

Title: PlastiSense

Size: A4 Date: 2025-12-28
KiCad E.D.A. 9.0.3

Rev: 1.0
Id: 1/1